

White Paper

Біла книга

A living network of hosts, paths and Curators across the Carpathian arc — the case, the evidence and the design

Жива мережа господарів, стежок і кураторів через усю Карпатську дугу — підстави, свідчення та задум

Trans-Carpathian Pathways · Транскарпатські стежки

October 2026 · Жовтень 2026 · UBEC / Carpathian Hub Initiative

Draft v0.11 — for discussion
Проєкт v0.11 — для обговорення

English — 2 · **Українська** — 31

ENGLISH

Trans-Carpathian Pathways

A living network of hosts, paths and Curators across the Carpathian arc — the case, the evidence and the design

October 2026 · UBEC / Carpathian Hub Initiative · White Paper, draft v0.11

How to read this paper

Trans-Carpathian Pathways has a proposal that says what it is, a starting prompt that records what has been decided, a co-creator agreement that says what each person in it promises, and a reasoning document that says why. This paper draws them together for readers outside the project — funders, partner initiatives along the arc, mountain communities and their councils, and the institutions now planning the Carpathians' future — and sets them against the evidence: what is happening to the Carpathians, what comparable projects elsewhere have learned, what the law allows, and what the research says about encounter, authenticity and the stewardship of lived-in landscapes.

Three kinds of statement appear here and are kept apart. **Decisions** are the project's, taken on dated record in its repository; they are cited as such. **Evidence** comes from the sources numbered in square brackets and listed at the end; where a figure could not be confirmed from a primary source, the text says so. **Proposals** are marked as proposals; nothing in this paper is decided by being written in it. The project is small and at an early stage, and this paper does not pretend otherwise: §11 says plainly what exists and what does not.

Summary

The Carpathians are being re-valued from outside faster than from within. Resort property in Bukovel now sells for more per square metre than new flats in Kyiv [1]; tourist-tax receipts in Ivano-Frankivsk oblast have grown four and a half times in four years [5]; wind farms and a mega-resort are planned on high meadows that have never carried industry [12][13]; and in September 2026 Ukraine convened the first Carpathian summit in Bukovel to plan the region's future across borders, with energy and transport as the headline and a declared commitment to "cultural landscapes" and "the traditional way of life of mountain communities" that has, so far, no instrument [17][18]. Ukraine's path into the European Union will in time open its land to buyers from across the Union; Poland and Romania show what that did to land and resort prices [22][23][24]. Meanwhile the people who hold the old way of life are growing old, cattle kept by the oblast's households fell by nearly a third between 2021 and 2024 [8], and the knowledge that made the meadows is passing with them.

The mountains are also receiving people. Some seventeen thousand people driven from their homes by the war were registered in the Kosiv, Yaremche and Vorokhta hromadas by March 2025 — registrations, not residents, and a hardship the hromadas carry with them rather than a choice of a way of life [7]. And the mountains are being re-inhabited: a craft economy of more than a hundred workshops survives in Kosiv, whose painted ceramics are on UNESCO's list of intangible heritage [28][29]; herders have won Ukraine's first geographical indications for polonyna cheese [31]; and families and single people are leaving the cities to learn and live the Hutsul way of life rather than to look at it. Many of them are the people whose voice was not asked when the mountains' future was planned.

Trans-Carpathian Pathways stands with that second movement. It is a network of hosts who offer what they actually have — a bed, a meal, guidance, a craft — from where they live; a pathway that emerges from where those hosts are rather than being drawn above them; and the people who keep it — pathway stewards who care for each stretch of it, and local Curators who hold the whole and suggest, never sell, a journey to each Pilgrim of the Plai, as the project calls whoever comes (§4.3). It runs on Plai, a consent-controlled map of the whole Carpathian range that UBEC already operates on its own server in the European Union. On it, anyone can plan a way on foot, and what a steward or Curator keeps of such a way becomes the project's only when the Curator publishes it. There is no booking calendar; the draft agreement adds no rating and no commission; payment is the host's to set, in forms the host chooses, and it passes directly from pilgrim to host; every host owns their own entry, or, where a Curator or steward entered it for them, has it changed or withdrawn whenever they ask. The first corridor runs from Vorokhta through Verkhovyna to Kosiv in the Hutsul highlands of western Ukraine.

The paper's argument, in short: Carpathian nature and Carpathian culture are one inheritance, made and kept by people living with the land, and the evidence from grassland ecology is unambiguous that the meadows depend on the mowing and grazing that made them [33][34][35][36]. What needs protecting is the relationship, not a landscape emptied of the people who made it. Travel that pays for that relationship to continue — encounter rather than extraction — is the one form of tourism that keeps a way of life rather than displaying it, and it works only if the encounter is real. That is the difference between sustaining and regenerating (§5): sustainability asks a resort to do less harm per visitor, and the resort now has an office for it; regeneration asks what a place needs to become more itself, and in mountains whose meadows degrade when left alone, less harm is not an answer. Comparable projects show that such networks live or die on maintenance budgets, named responsibility for every stretch, honest counting, and a steward designed before the money arrives [37][39][41][45]. Pathways is built to those lessons. Over time, the places its hosts share will trace corridors where cultural, natural and landscape heritage need stewardship as one whole — not wilderness, and not a designation from above, but a map a community can use to say what its land is worth before others decide it for them.

The project asks for support for people on the ground first and software second; for partner initiatives in each country of the arc; and for a place in the Carpathian Eight's and the Carpathian Convention's work on community support and cultural landscapes, as one concrete form that support can take.

1. The Carpathians at a turning point

1.1 Tourism and property

The Ukrainian Carpathians have become the one Ukrainian region where the war has raised, not frozen, the property market. Quality complexes in Bukovel start at about $2,500 a square metre fitted, and some apart-hotel formats reach $6,000, against a median of about $1,400 unfitted in Kyiv's new builds in May 2026 [1]. The pressure is no longer confined to the resort. An average house in Verkhovyna was listed at about 1.8 million hryvnia in October 2025 and in Kosiv at 1.9 million, against 7.1 million in Yablunytsia, 8.3 million in Mykulychyn and 11.7 million in Polianytsia, the hromada in which Bukovel lies [2] — a gradient of six and a half to one from the resort to the first corridor's middle town, the gap that now draws buyers towards Verkhovyna, and the measure of the pressure still to come. Verkhovyna already appears among the most expensive places to buy a house in the Ukrainian Carpathians, with prices up 10–15% between spring and summer 2025 [3].

Visitor pressure has grown with it. The oblast tourism department estimates 2.5 million visitors a year since 2023, against 2.0–2.3 million before the full-scale invasion, and its tourist-tax receipts rose from 10.4 million hryvnia in 2021 to 46.2 million in 2025 [5]. Over the 2024–25 New Year, Bukovel's hotels ran at 77–

84% occupancy and visits to the Yaremche area were up 30–40% on the year; developers had 45 hotel-apartment complexes and 108 cottage towns in the pipeline for 2024–26 [6]. The resort is the reason the Polianytsia hromada records 2.4% unemployment and record tourist-tax income [4], and its success brings pressure on the land around it: in March 2026 a court annulled the cadastre registration of twenty forest plots of century-old beech and fir near Bukovel, registered on forged state acts for cottages and hotels; the prosecutors cited the Carpathian Convention [11].

The damage reaches the high ground. In 2026 off-road convoys of thirty to fifty vehicles sell two-hour tours of the ridges for 3,000–4,500 hryvnia; vehicles have been driven into Lake Herashaska on Svydovets and up stream beds, and an attempt was made to breach the barrier protecting the Petros–Hoverla stretch of the Carpathian Biosphere Reserve; the fine for a citizen is 153–408 hryvnia [10]. On the Dragobrat plateau, by Texty.org.ua's count of about 2017, more than fifty cottages and hotels crowded the ridge, with plots leased inside the Biosphere Reserve and some 190 hectares clear-cut below [9].

1.2 Energy and industry on the high meadows

Two larger projects would change the range itself. The Svydovets resort, which Bruno Manser Fonds' 2019 report describes as planned by the owners of Bukovel, on 1,430 hectares of one of the best-preserved massifs in the Ukrainian Carpathians, would bring 230 kilometres of pistes, 60 hotels, 390 holiday homes and up to 22,000 guests a day to a landscape of post-glacial lakes, old-growth forest and two Emerald Network sites [12]. In October 2024 the Supreme Court upheld the annulment of its detailed plans and no environmental assessment has been submitted; the file remains open before the Bern Convention's Standing Committee [14]. Wind farms are the newer front. On the Runa polonyna, CEE Bankwatch reports, construction of 30 turbines of 156 MW began before any environmental assessment; the assessment came back positive in February 2026, an appeal court ruled the felling of virgin forest for the access road illegal in July 2026, and more than forty hectares had already been cleared for a power line [13]. Wind Parks of Ukraine propose some 1.5 gigawatts across Zakarpattia's ridges, Svydovets among them [13]; the same 1.5-gigawatt "Carpathian wind-energy cluster" was pitched at the Carpathian Eight summit in September [19]. Environmental groups warn that the plans would turn up to half of Zakarpattia's high-altitude area into an industrial zone, and that oversight has weakened under martial law [15][16].

None of this is an argument against energy or against work in the mountains. It is an argument that the mountains' future is being decided by people who will not live in them, at a speed that leaves no time for the people who do to say what they want — and that the one thing all these projects have in common is that they treat the high meadows as empty.

1.3 The arc as a political region

The Carpathian Convention, adopted in Kyiv in 2003 and in force since 2006, binds seven countries — Czechia, Hungary, Poland, Romania, Serbia, Slovakia and Ukraine — to protect and develop the range together [25]. Its Protocol on Sustainable Tourism entered into force in 2013 [26]; a protocol on cultural heritage was drafted in 2014 and never adopted [27]. Its eighth Conference of the Parties is scheduled for the end of 2026, after which Ukraine holds the presidency for a year [25].

On 18–20 September 2026, in Bukovel, Ukraine launched the Carpathian Eight: Ukraine, Poland, Romania, Slovakia, Czechia, Austria, Hungary and Serbia, with the European Union as a whole. The agenda was security, energy, logistics, cross-border trade and "support for our communities"; fifty agreements worth over a billion euro were signed, more than half on solar and wind power [17][19]. The declaration was signed by six states — Austria, Poland, Romania, Serbia, Slovakia and Ukraine [18]. Hungary, counted by Kyiv among the eight, sent only its acting chargé d'affaires, did not sign, and says it is not a member of the initiative; Czechia took part but did not sign [20]. Its text matters for this project. It builds on the Carpathian Convention and commits the signatories to "the preservation of cultural landscapes, the traditional way of

life of mountain communities", including intangible heritage, to "the development of shared cultural and tourist routes", to local crafts, and to biodiversity protection under the Convention; it considers an EU macro-regional strategy for the Carpathians and annual summits [18]. The official project list, however, runs to 90 projects worth $10.7 billion, of which energy accounts for $7.28 billion and transport $1.05 billion [19]. Cultural landscapes and the traditional way of life have a sentence; they do not yet have an instrument.

A month earlier the President met the heads of every mountain hromada in the four Carpathian oblasts. The agenda was roads, all-terrain buses, forestry and tourist-tax rules, flood prevention and veterans; depopulation, land and heritage were not on it [21].

1.4 Land, and the European Union

Ukraine opened its agricultural land market to citizens in July 2021 and to Ukrainian-owned companies in January 2024; foreigners and foreign-owned companies remain excluded until a national referendum, which cannot be held under martial law [22]. Some 636,000 hectares had changed hands by mid-2025, at prices rising from about 45,000 hryvnia a hectare in early 2024 to over 60,000 by June 2025 [23]. Within settlements, foreigners may already buy houses and non-agricultural plots; the garden plot of a village house is agricultural land and cannot pass to them [56].

Accession will change this. Free movement of capital is part of the acquis, and every recent entrant negotiated a transition rather than an exemption. Poland asked for eighteen years and got twelve, to 2016; over that period private farmland prices rose some 690%, and even in the mountainous Małopolskie region, which rose least, they rose 253% between 2005 and 2016 [24]. In Zakopane, the Polish Tatras' resort town, land reached about 5,000 złoty a square metre and tourist apartments 20,000, bought mainly as rental investments, against under 11,000 for a Warsaw flat [24]. Romania's seven-year restriction ended in 2014; the price boost in some areas was to twice the regional average, and in the Saxon villages of Transylvania — whose Saxon population fell, by one journalist's figure, from near a million before the war to some twenty thousand by 2002 — heritage houses were "modernised" with PVC and tin faster than any code could be enforced [22][24]. Ukraine's accession clusters were declared informally open in March 2026 and the first formally opened in June; a single member state's veto still blocks two others [59]. The question is not whether the Carpathians' land will open but how many years the mountain communities have to decide, before the market does, what their land is for.

1.5 The people who hold it

Ukraine has had no census since 2001, and population figures for raions have not been published since 2022, so the demography of the corridor is known only in outline [7]. Kosiv raion fell from 86,615 to 83,700 between January 2020 and 2022, before the full-scale war; Verkhovyna raion holds about 30,000 people on 1,254 square kilometres [7]. Studies of the Carpathian region find that many mountain villages did not depopulate between 1989 and 2020 as the plains did — recreation, forest and the mountain-settlement law held them — but that the mountainous districts of Ivano-Frankivsk and Chernivtsi oblasts have been losing people to the towns, and that "depopulation and ageing of rural areas" is the region's main threat [7].

The land itself records the change. Cattle in Ivano-Frankivsk oblast peaked at 294,300 head in 2003; in private households they fell from 109,500 in 2021 to 76,000 in 2024, 15.5% below the year before [8]. Ukraine's household sheep and goats fell from over two million around 2009 to under 1.4 million by 2019; herders' associations name the reasons: a ewe gives milk for 120 days and must be kept year-round, polonyna cheese sells for 100–120 hryvnia a kilogram with no protected name, and the work is hard and undervalued [8]. The age of those who still keep sheep and mow the meadows is not recorded anywhere this research could find; that the holders are growing old and their land will change hands within a generation is the project's own observation in the region, and §12 lists it among the things the first visits must establish.

2. What the mountains are: a continuing landscape, not wilderness

2.1 The meadows were made

Most polonynas — the high pastures that are the Carpathians' signature — are not natural. They were cleared by herders, notably during the Vlach colonisation from the fourteenth and fifteenth centuries onward, "within the forests up to the tree line and krummholz" [34]; natural meadows lie only above the upper tree line. Their biodiversity is a product of their use. A cross-border study of 48 parcels in eight villages of Maramureș and Bukovina, on both sides of the Ukrainian–Romanian border, found 78% of Ukrainian and 83% of Romanian parcels still traditionally managed; management explained plant richness better than topography or soil; regular mowing raised the richness of vascular plants and grazing that of bryophytes; and depopulation and falling livestock numbers were identified as the drivers of change [33]. In the Transylvanian subalpine meadows, 626 species were recorded across the stages of abandonment, with vascular plants peaking in the mown meadows and each successional stage holding the maximum for some group — so that the richest landscape is one kept in several stages of use at once [35]. Where grazing stops, green alder invades the polonyna and the species composition that centuries of use built begins to go [34]. Fischer, Hartel and Kuemmerle put the policy conclusion plainly: "the conservation value of traditional farming landscapes is often exceptional", unprofitability leads to abandonment on one side or intensification on the other, and what is needed is a transformation strategy that "seeks to support community-led efforts to create new, direct links with nature" [36].

This is why the project refuses the word *wilderness* for the Carpathians' meadows and villages. The frame is empirically wrong there even where it is right for the old-growth beech. A protected landscape that bans the mowing and grazing that made it, or that only the wealthy can afford to live in, has failed by its own measure.

2.2 Two vocabularies the world already uses

The vision has a footing in categories that governments and funders recognise. The IUCN's Category V, the *protected landscape*, is defined as an area "where the interaction of people and nature over time has produced an area of distinct character with significant ecological, biological, cultural and scenic value: and where safeguarding the integrity of this interaction is vital to protecting and sustaining the area" [60]. It covers more than half of Europe's protected-area estate; its critics rightly say it carries no automatic biodiversity value and should be judged by outcomes rather than by designation [60] — a caution this project accepts; §9's conditions and the signs of success and failure in §12 say how it would be met. UNESCO's World Heritage framework names the *continuing landscape*: one that "retains an active social role in contemporary society closely associated with the traditional way of life, and in which the evolutionary process is still in progress" [61]. The Hutsul polonyna economy is a textbook case. Behind both stands the concept of *biocultural diversity*, "the diversity of life in all its manifestations — biological, cultural, and linguistic — which are interrelated within a complex socio-ecological adaptive system" [62]. The Carpathian Convention already treats nature and culture together in its text [25]; what has been missing is an instrument at the scale of a village and a path.

2.3 Knowledge goes when practice stops

Traditional ecological knowledge is "a cumulative body of knowledge, practice, and belief, evolving by adaptive processes and handed down through generations by cultural transmission"; it is transmitted orally and by apprenticeship, and it breaks when the practice stops [71]. That is the mechanism behind the project's claim that encounter keeps a way of life alive where a museum cannot: knowledge of a meadow, a

cheese or a loom is kept only by someone doing it beside someone who knows. A pilgrim who learns is one more learner. What matters most is whoever stays and takes the knowledge on — a host's grandchild, a neighbour, or a family that has come to live in the mountains.

3. The people who keep the mountains alive

3.1 Those who stayed and those who came

The Hutsul craft economy is alive and concentrated. Kosiv holds more than a hundred private workshops, ten museums, the Kosiv Institute of Applied and Decorative Arts and the Saturday bazaar, the largest craft market in Ukraine; the Soviet-era "Hutsulshchyna" art enterprise once employed some three thousand people [28]. The tradition of Kosiv painted ceramics was inscribed on UNESCO's Representative List of the Intangible Cultural Heritage of Humanity in December 2019 [29]. In Yavoriv the Kischuk family keep a museum-workshop of lizhnyk weaving and the rare long-haired sheep that supply it [30]. On the polonynas, an association of producers of traditional high-mountain cheeses, founded in 2018 with Slow Food's support against lowland imitations, won Ukraine's first geographical indications: "Hutsul cow brynza" was registered in September 2020, managed by the Association of Carpathian Vatahy in Verkhovyna, with six polonynas certified in the first year — Krynta, Skupova, Lukovytsia, Bybratkivka, Zgarda and Shchivnyk [31]. A Kosiv programme to revive sheep farming, announced in 2022 with the aim of 16,000 sheep and 500 jobs in four years, rests on the observation that fifty sheep let a farmer stay rather than work abroad; its results are not yet published [8].

The war has brought people as well as pressure. Ivano-Frankivsk oblast had registered 92,624 internally displaced people by March 2025, against 3,829 in January 2021; the Kosiv hromada alone had 5,702, Yaremche 5,605 and Vorokhta 5,384 — the last roughly equal, on paper, to Vorokhta hromada's own population. Registrations overstate presence; in one town 1,474 were registered and 322 found [7]. Some have stayed to work: an atelier relocated from occupied Kakhovka to Kosiv in 2022 now employs fifty women from the town and its villages, several of whom had previously done seasonal work in Poland [32]. Beyond the displaced, families and single people are leaving the cities to learn and live the Hutsul way of life — the observation on which the project's hope rests, and for which this research found only anecdote. Counting them, and asking why they came, is work for the first corridor.

The literature on mountain newcomers is clear about what makes the difference. Studies of the Alps and Pyrenees find that "new highlanders" revive old trades and open "responsible, shared tourism between hosts and guests", but also that urban buyers raise prices and push out the young, that deep friendship across the line is rare ("you're always the immigrant"), and that resettlement "must be organised, accompanied, if not encouraged" [70]. Newcomers integrate rather than gentrify when they take up land-based work and shared labour, when housing is not commodified, and when they enter the institutions that exist — the hay-making, the festival, the church — rather than building parallel ones. The same line separates a host from a performer: the relationship to the place.

3.2 Who speaks for a community

When a resort or a wind farm is said to have local support, the first question is who said so, and who was not asked. A 2025 report from the Yasinia and Ust-Chorna communities says their leaders and residents still hope for the Svydovets resort, for the tax income it would bring — without saying which residents were asked — and in turn casts the resort's opponents as serving logging interests [16]. Each side says the other's community voice is a cover for interests. The pattern is universal. The World Bank's review of participatory development found that induced participation is "often dominated by elites" unless there is a responsive centre and a long commitment [72]; Platteau calls elite capture "a serious problem" for

community-driven development and finds no remedy that does not involve releasing resources gradually and checking [73]. Participatory mapping has its own ethics: the risk of "endangering people through the information they show", of data that outsiders "would then exploit", and of "demanding precision where fuzziness might be more appropriate" [74].

Pathways puts the question in every direction, to its own supporters included. It does not claim to speak for any village, and it is built so that no one has to: each host has their own account and their own entry, consents field by field, and withdraws at will — or, where a Curator or steward entered the place for them, has it changed or withdrawn whenever they ask; a Curator speaks for what they publish; the project speaks for itself. Across the Carpathians the people whose voice was passed over are finding each other and finding initiatives that will listen, and the tension between them and those who speak in their name is growing. A network of individual voices, each owning its own words, is the project's answer to that tension.

4. Why encounter

4.1 The diagnosis

Two problems meet in the Carpathians and share one answer. Travel is more and more often extraction: travelers move through places without touching them, hospitality is more and more often staged, and what the traveler takes away is a view while what stays behind is a fee, most of it to someone who does not live there. Mountain life is thinning out: villages lose people, knowledge goes unpassed, and the economy that sustained a way of life has moved elsewhere. Encounter answers both because knowledge passes from person to person, by doing something beside someone, and because a pilgrim who sleeps under a roof, eats at a table and learns how something is made leaves money and attention in the hands of the person who holds the knowledge. A host who shares what they actually have gains a reason to keep it, and a means to.

The condition is that the encounter be real. Half a century ago MacCannell described tourist settings as "a staged back region, a kind of living museum", built because "touristic consciousness is motivated by its desire for authentic experiences" [63]. Once a host performs, what is paid for is the performance, and the way of life is still lost — more slowly, and more profitably. Wang's distinction offers the way out: *existential* authenticity is a property of the activity rather than the object, found in shared work, walking and eating rather than in displays [64]. A network built on beds, meals, guidance and workshops in use, with no stage, is an attempt to stay on that side of the line.

4.2 What community-based tourism has learned the hard way

The record of community-based tourism is sobering and the project reads it as a checklist. Of 116 initiatives that experts identified as successful, 28 of the 133 surveyed answered, 15 met the definition, and only six were economically sustainable; a review of 200 community-tourism projects across the Americas found many lodgings running at about 5% occupancy; nine of the fifteen were still donor-dependent, and the authors recommend confirming that travelers exist before building beds and treating donor dependence after five years as a warning sign [45]. Blackstock's critique names three failings: the literature treats the host community "as a homogeneous bloc", takes a "functional approach" to involvement, and "neglects the structural constraints to local control" [65]. On leakage, the Overseas Development Institute finds that in the best cases a fifth to a third of destination tourist turnover reaches the poor, and that the food supply

chain — not the bed — is the largest channel, about half of poor people's tourism earnings in its Luang Prabang case [46]. The lesson for a host network is that meals and workshops matter as much as lodging, and that a project which cannot show a traveler should not promise a host an income.

Regenerative tourism, the field's current frontier, asks that travel "deliver a net positive benefit to people, places and nature", finds that certification "contributes little", and warns that without consent and social licence tourism "risks becoming a dirty sector" [66]. The project's reading is that regeneration is not a label but a relationship, and that the relationship has to be visible in the design: who owns the data, who holds the route, who takes the money. §5 sets regeneration against the sustainable-development frame it replaces, and says why the Carpathians need the stronger one.

4.3 Pilgrimage to what

The proposal calls the pathway a "pilgrimage infrastructure", and the Hutsul region has real places of religious pilgrimage. The word is used here in the sense the anthropology of pilgrimage gives it — liminality, the threshold crossed, the *communitas* of people on the way together — and in Turner's caution that "a tourist is half a pilgrim, if a pilgrim is half a tourist" [67]. There is no shrine at the end of the path. A pilgrim walks into a relationship between people and land that has lasted centuries, is received into it for a night or a month, and leaves having taken part in it rather than having looked at it. The pilgrimage is to the relationship itself. The word is kept, and gives the project its name for the person who comes: the **Pilgrim of the Plai**, in Ukrainian *прочанин плаю* (Michel's word, October 10, 2026). *Plai* is the Hutsul and Romanian word for the old path through the high pastures, along which flocks were driven up the mountain and down; the map the project runs on takes its name from it (§6.2). *Прочанин* comes from *проща*, the pilgrimage still walked in the region and set apart there from tourism as inner work; the word is related to *прощати*, to forgive, so it carries reconciliation as well as seeking. The pilgrimage is to the plai and to the people who keep it, not to a shrine. Whether the project says outright that it borrows no one's faith remains among the open questions in §12.

5. From sustaining to regenerating

The project has so far said what it refuses and why. This section says what it is for, in the terms the field now uses, and why it chose regeneration over the frame that has governed development for forty years.

5.1 What sustainable development promised, and where it stands

Sustainable development was defined in 1987 as "development that meets the needs of the present without compromising the ability of future generations to meet their own needs" [82]. It became the frame of the Rio conventions, of the seventeen Sustainable Development Goals and their 169 targets adopted in 2015, and of a vocabulary now used by every ministry, bank and resort. In tourism it took the form the UN agencies gave it in 2005: "tourism that takes full account of its current and future economic, social and environmental impacts, addressing the needs of visitors, the industry, the environment and host communities" [84].

Two things should be noticed about that definition before anything is said against it. It is a balance between four claimants, and the industry is one of them. And its verbs are to take account, to address, to minimise, to maintain. It asks how an activity can continue with less harm. It does not ask whether the activity is what the place needs.

Where the frame stands is on the record. The United Nations' own 2025 report finds that only 35 per cent of the Goals' targets with trend data are on track or making moderate progress, close to half are advancing too slowly or only marginally, and 18 per cent have regressed [83]. The record in the Carpathians is in §1,

and it has a precise local form. Bukovel runs a Sustainable Development Office: free hourly buses, 0.6 megawatts of solar on hotel roofs, seven charging points, eleven hotels with Green Key certification, a partnership for low-carbon transport [85]. The same resort's owners planned the Svydovets mega-resort [12]. Separately, twenty forest plots near the resort, registered on what the court found to be forged state acts, were returned to the state in 2026 [11]; this paper makes no claim about who registered them. This is not an accusation of bad faith. It is what the frame does: it asks the resort to do less harm per visitor, and it is satisfied when the resort does. It has nothing to say about whether a valley of apart-hotels at $6,000 a square metre is what the valley should become, because "the industry" is one of the parties whose needs it exists to balance.

That is the sense in which sustainable development has been neglected in the areas where it would bite. It was applied where it was convenient — energy, waste, lighting, a certification — and left aside where it would have cost something: land, who decides, what a place is for, whether a way of life continues. And it was co-opted: a word available to any actor with a marketing budget is a word that soon means nothing. Critics inside the field say as much; regenerative tourism's own literature finds that sustainability certification "contributes little" [66].

5.2 What regeneration asks instead

Regenerative design has a lineage older than the Goals — Lyle's *Regenerative Design for Sustainable Development* of 1994 [86] — and a clear statement in Reed's 2007 argument: "Sustainability, as currently practised in the built environment, is primarily an exercise in efficiency." He set out a trajectory of approaches, each nested in the more whole: limiting the damage; then *neutral*, which is where green and sustainable design sit, "a generalized ideal of doing no harm"; then restoring the local living system to health; then regenerating, "the evolution of the whole system we are part of". Regeneration, he wrote, is "the only way to sustain sustainability". And it is place-based: the work "begins by attempting to understand how the systems of life work in each unique place", and the role of those involved "is to create a whole system of mutually beneficial relationships" [87]. Later work turns this into method: designing from place, with the community, watershed or bioregion as the sphere in which people can take part [88]; and into a research programme, regenerative sustainability as "thriving living systems in which whole-system health and wellbeing increase continually", with indicators specific to each place and developed through co-creation, and — unusually for the field — the integration of spirituality named among its conditions [89]. In tourism the same move is regenerative tourism, which asks that travel "deliver a net positive benefit to people, places and nature" rather than a reduced negative one [66].

The difference is not one of ambition but of question, unit and measure.

	Sustainable development	Regeneration
The question	How can this activity continue with less harm?	What does this place need to become more itself?
The unit	Three pillars to balance — economy, society, environment	One living place, people included, nested in a larger one
The measure	Impact reduced, targets met, harm offset	The health of the whole and its capacity to go on
The people	A stakeholder group whose needs are addressed	Participants in the place's life, and the ones who know it
The place	A site where generic standards are applied	The source of the design, each one different

	Sustainable development	Regeneration
Who defines success	The standard, the certifier, the global goal	The place and its people, co-creating the indicators
The aim	Neutral: no net harm	Net positive: more alive than before

Regeneration does not discard sustainability's floor; doing no harm remains a condition. It refuses to treat the floor as the aim.

5.3 Why regeneration is the way forward for the Carpathians

Where each approach aims




Sustainability asks how to do less harm. Regeneration asks what this place needs to become more itself, and builds from there. The first is a ceiling on damage; the second is a direction.

Because neutral is not enough where the land was made. §2 showed that the Carpathian meadows depend on mowing and grazing and degrade when left alone. A frame whose aim is zero intervention and no net harm cannot keep a landscape that needs intervention to exist. For a continuing landscape, sustaining means holding still, and holding still means losing. The first diagram places the three approaches on one line: resort tourism, which does less harm each year and more of it; sustainable tourism, the same model with its damage reduced, aiming at zero; and Pathways, whose aim is that every visit adds to the place's capacity to continue.


What each approach sees

Sustainable development



It measures
Impact reduced, targets met, harm offset


Regeneration

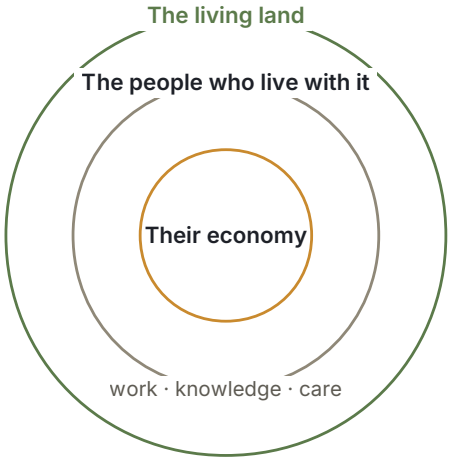

It measures
The health of the whole, and its capacity to go on

Because the pressures already speak sustainability's language. The wind cluster pitched at the Carpathian Eight is renewable energy. The resort has a sustainability office. Accession is development. Each of the forces in §1 can describe itself as sustainable without lying, because the frame balances their needs against the mountains' and calls the balance the goal. A project that competes on doing less harm has already lost that argument; the resorts will always have more harm to reduce. The second diagram shows what each approach sees: three pillars to be balanced against one another, with the land one pillar among three; or a living place in which the land holds the people and the people hold their economy, and what moves between them is work, knowledge and care.

Two flows in the same mountains

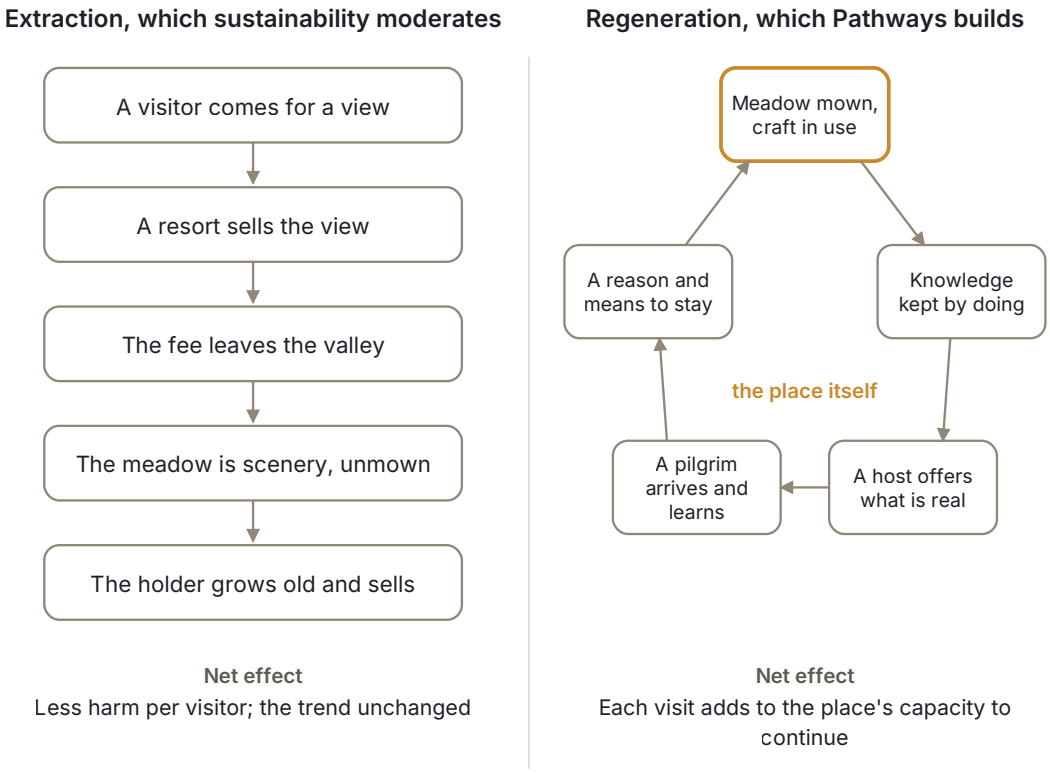

Because the people who keep the mountains alive are already doing it. Regeneration's unit is the living place, people included; its method is co-creation by those who know the place; its indicators are the place's own. That is a description of the second force in §3: the herders certifying their polonynas, the weavers keeping the long-haired sheep, the newcomers learning to mow. The third diagram sets the two flows side by side. On the left, the line sustainability moderates: a visitor comes for a view, a resort sells it, the fee leaves the valley, the meadow is scenery and goes unmown, the holder grows old and sells. On the right, the loop Pathways builds: a meadow mown and a craft in use keep knowledge alive by doing; a host offers what is real; a pilgrim arrives and learns; the host gains a reason and the means to stay; the meadow is mown again. The net effect of the first, at its sustainable best, is less harm per visitor with the trend unchanged. The net effect of the second is that each visit adds to the place's capacity to continue.

Because the design is already regenerative in its parts. Place-specific: one corridor at a time, its route emerging from where its hosts are, never a template. Co-creative: consent field by field, the Curator a person of the place, governance to pass to the corridor. Whole-system measure: success not counted in pilgrims but in hosts still hosting, a young person learning a meadow's work, money staying in the villages (§12). Grounded in relationship and, in §9's words, in spirituality — the condition Gibbons names and most of the field avoids. What this section adds is the name for the whole, and a test the project can be held to.

Two cautions, so the word is not borrowed cheaply. Regeneration can be co-opted as sustainability was; it is already a marketing adjective in tourism, and the project's own stress tests, recorded in its reviews, show how easily its language is lifted. The defence is not the word but the measure: a place is either more alive and more able to go on than before the pathway, or it is not, and §12's signs of success and failure are the project's way of being caught if it is not. And regeneration is a direction, not a credential: nobody certifies it, which is its strength against capture and its weakness before a funder who wants a label. The project offers the measure instead.

6. The model

6.1 Three interlocking things

Trans-Carpathian Pathways builds a network of hosts, a living pathway between them, and the people who hold it.

Hosts are people who choose to share something real from where they live. A host offers one or more of an overnight stay, a meal, local guidance and a workshop, and describes it as it is — the honest offer. Hosts are not service providers. One host is one place on the map, with a list of offers and, beside it, the months open, capacity in small whole numbers, the languages the host speaks and how the place is reached — on foot only, by car, with a pram, with a wheelchair (decided October 7, 2026).

The pathway is not designed from above. It emerges as hosts join: each becomes a point, and the paths between them follow the existing network of footpaths and trails. Since October 2026 anyone can plan a way on Plai — "Plan a way", from a start to an end, footpaths first, roads only where nothing else joins — and the planner says where it doubts: each gap it joined, each road it walked, each town it crossed. A pathway steward or the Curator keeps a planned way as a *stretch*, corrects it on the map by hand, and puts stretches in walking order as a *corridor* — a journey's route; only the Curator publishes, and what was walked and saved becomes the planner's best knowledge, so the network grows from what people actually walk. Viewpoints, springs and other places worth arriving at are mapped as places along the way, not as offers.

The Curator is the memory of the path, usually a local farmer, teacher or walker: someone who knows the path and its hosts, listens to each pilgrim's time, company and wish, suggests a route rather than prescribing one, and keeps track of who can receive whom and when. The Curator publishes what hosts enter, or holds it; holds the safety knowledge that is never published; and, as the draft agreement proposes, takes nothing from a host for sending pilgrims. Beside the Curator stands the **pathway steward**, a role added on October 8, 2026: someone who cares for a stretch of path, knows its hosts and places, may enter a place for a host who cannot, add places along the way and save a planned way as a draft, and leaves publishing to the Curator.

Role	Does	On Plai
Host	Enters their own place, or has it entered with their agreement	An entrant's account, or none
Pathway steward	Cares for a stretch; enters for a host; adds places along the way; saves stretches and corridors as drafts	A steward's account
Curator	Publishes or holds — places, stretches and corridors; suggests journeys; holds safety knowledge; also enters	A curator's and an entrant's account
Pilgrim of the Plai	Plans a way on Plai; walks a stretch, for an afternoon or a month, and arrives as a guest	No account

6.2 Plai: a map that already exists

The project does not start from zero. Plai is the Carpathian hub of UBEC Mapservice, an open-source map service that UBEC runs on its own server in Germany, on PostgreSQL/PostGIS, MapServer and Mapbender. In place today: a base map of the whole Carpathian range from OpenStreetMap, some 32 million features

with hiking routes drawn on top; an entry surface where a person places a point exactly where they mean it and describes it; consent built into the database, field by field, so that a curator decides what is published and withdrawn entries leave every map and export; one photo per place, cleaned of location and camera data before it is stored; the host fields above, built and proven in a browser on October 7–8, 2026; a tick on every entry that the person has read and accepts the co-creator agreement, with the version and time recorded; and full export at any time. Pathways is a view of Plai's entries, not a system of its own (decided October 7, 2026): one place for a host to enter, one consent model, one curator queue. Plai's own name carries the idea (proposed; not yet decided): in the speech of these mountains a *plai* is a mountain path, the kind that follows a ridge from one pasture to the next. The name has a precedent in these mountains' own history: the Ukrainian regional studies and tourism society *Plai*, founded in Lviv in 1924, joined in one body the study of the land, the protection of natural and archaeological monuments, the marking of trails and the building of shelters, and built what is described as the first Ukrainian mountain shelter for tourists, on the Plisce meadow in the Gorgany, in 1933–35 [90]. The project takes the name in the same spirit and claims no descent from the society.

6.3 What it refuses

No calendar. Availability beyond the season is a conversation with the Curator, never a booking grid, because a calendar is the first step to a booking service and a booking service turns a host into a supplier with slots to fill.

No ratings (decided October 11, 2026). Hosts are not scored, ranked or reviewed in public unless they consent to it, because a score teaches a host to perform for the score.

No commission (agreement §8; decided October 9, 2026). The project, its Curators and its stewards collect no payment for stays, meals, guidance or workshops and take no share; a Curator takes nothing from a host for sending pilgrims. A host chooses, for each offer, among a fixed contribution, a suggested contribution, an exchange of work, and ubec-pay or a community currency (decided October 7, 2026); the form of payment is shown on the map, while the amount is told to the Curator and never shown, and the Curator never holds the money. Payment passes directly from pilgrim to host (decided October 9, 2026; A-3 closed); why gift is not among the forms remains open (§12).

No performance. The encounter is real or it is nothing. Nobody stages tradition for visitors.

No algorithm deciding. The pathway planner proposes; a person decides. Anyone can plan a way on Plai, and its answer is a proposal like any other: it promises no bed and no welcome, says nothing about the state of a path today, and names a published host only by name and the time the detour takes. A way becomes the project's only when a Curator publishes it, and with five hosts the Curator still plans on paper where that is simpler.

No one speaks for a community. A host speaks for their own place, a Curator for what they publish, the project for itself.

Not wilderness. People and land are one and the same. What needs protecting is the relationship.

6.4 Data stays with the people

Each person decides what is shown about them, field by field; unticking a consent removes that detail from the public map at once; withdrawing a place removes it from every map and every export; anyone may ask for a copy of everything held about them, or for deletion. The project never sells or lends data, shows no advertising, tracks no visitor, and hands data to no one, an authority included, unless the law compels it. As drafted (open A-2), entries and photos are not released under an open licence: the project review's reasoning is that an open licence cannot be revoked, so a host's home released under one could be copied forever after the host withdrew it, in wartime. The entrant keeps every right; UBEC holds a permission to

store, show as consented, back up and hand back, which ends with withdrawal. These are the project's translation of the CARE principles for data governance — collective benefit, authority to control, responsibility, ethics — which "complement the existing data-centric approach" with one that is "people- and purpose-oriented" [75], and of the platform-cooperative principle that the people a platform serves, not its operator, own the data and the rules [76].

7. What others have learned

Nothing in this design is untested elsewhere, and the record of comparable projects is the project's most useful teacher. Eight cases, and the lesson each carries.

Via Transilvanica (Romania). Some 1,400 kilometres from Putna to Drobeta-Turnu Severin, built 2018–2022 by one NGO, Tășuleasa Social, with more than ten thousand volunteers and a thousand hand-carved andesite milestones; inaugurated October 2022; Europa Nostra's citizen-involvement award in 2023 [37]. Construction cost about €1.8 million from donations, by design without state money; the annual operating budget is now over €2.5 million from some 1,200 donors and a membership scheme, and 300–400 kilometres of marking must be refreshed every year [38]. Visitor counts drift — about 30,000 in 2024 by one estimate, 37,000 by another, and 120,000 claimed for 2025 , and the sources do not say how they counted [38]. The host layer stayed informal: private guesthouses on an app map, with no published selection or standard, until in 2026 the association began building its own tiny-house modules on chosen families' land [38]. Documented outcomes are strong but anecdotal: one host up 600% in guests "but the figures are still small"; one village from 18 to 28 residents and its first birth in forty years [38]. Property-price rises, commodification and uneven benefit between villages on and off the route are the risks any such trail carries, and this paper names them for Pathways in §12. *Lesson:* a single committed body with a membership base and volunteer section-adopters can hold a long trail without the state — but maintenance is the recurring cost, counting must be owned by someone, and a host layer left informal leaves open who the hosts are and what they gain.

Via Dinarica (the Dinaric Alps). Donor-built from 2010 with USAID and UNDP, then Italian cooperation: over a thousand kilometres marked, dozens of huts and guesthouses rebuilt, grants to providers, jobs mostly seasonal; a stated goal in its second phase of a "community-owned and operated tourism product" [39]. After some $7 million and twelve years it still relies on a donor-funded support centre, and UNDP itself notes that communities "had yet to fully capitalize on economic opportunities" [39]. *Lesson:* design the steward before the grant, not after; "community-owned" was an objective, not an outcome.

The hiking clubs of central Europe. The Czech club KČT keeps about 43,000 kilometres marked through regional commissions in which each volunteer marker is assigned a section and reprimanded for neglect, with a small public subsidy it "could not manage without" [40]. Slovakia's KST has about 350 volunteer markers and a three-year renewal norm of some 5,500 kilometres a year; in 2025 it renewed 1,200 for lack of funds, and a bill to regulate trail care was postponed [40]. In Ukraine the Transcarpathian Tourist Trail — 398 kilometres marked in 2010 to Czech standards by a Swiss–Ukrainian forestry project — has no identified maintaining body, and the Eastern Carpathian Trail in the Gorgany was re-marked by a single volunteer mountain rescuer [41]. *Lesson:* a century of evidence that named responsibility per stretch plus a small steady subsidy keeps a path alive, and that where either is missing marking decays within a few seasons. The pathway steward is the project's version of the section-adopter.

Bergsteigerdörfer (the Alps). Since 2008 the Alpine clubs of Austria, Germany, Italy, Slovenia and Switzerland have certified 43 "mountaineering villages" that implement the Alpine Convention: no village over 2,500 residents, no firm over fifty staff, no valley-linking ski development, with mandatory criteria on alpine competence, landscape and mobility, an annual convention, and expulsion for a village that falls

below them [42]. A 2012 evaluation found no measurable rise in overnight stays yet, high awareness among club members, and results that depended on whether a municipality or volunteers drove the work [42]. *Lesson:* a label is credible only if it can expel; and it earns awareness long before it earns income.

Fundația ADEPT (Târnava Mare, Romania). Since 2004 ADEPT has worked with some 1,500 farmers in the Saxon villages; it helped design Romania's high-nature-value grassland payment, which brought about 1,400 families some €1.5 million a year and over €2 million a year into the area, with 24,505 hectares of grassland under payment; its tourism work — festivals, markets, a wildlife centre — is described but not quantified [43]. By contrast, a matched study of Romania's LEADER local action groups found no significant difference in non-agricultural turnover or employment between participating and non-participating communes [44]. *Lesson:* the durable results came from a payment stream tied to land practice, not from tourism marketing or grant programmes alone.

Donativo hospitality on the Camino de Santiago. The pilgrim hostels that run on contribution rather than price survive on three things: volunteer hospitaleros, a building owned by a parish or association, and gifts from former pilgrims. Suggested giving is €5–12 for bed, dinner and breakfast; "stingy pilgrims send the albergue on a downward cycle", some private owners call a fixed €12 "donativo", and after the pandemic a hostel that once needed twenty pilgrims' gifts a night needs twelve [47]. The hospitality networks Servas (since 1949, hosts never charge, applicants interviewed by a national committee), Warm Showers and BeWelcome run on membership and volunteer governance [48]. *Lesson:* contribution-based payment needs a cost-carrier other than the guest's gift, and a definition of the difference between a contribution and a price that both host and pilgrim recognise.

Platform cooperatives. Fairbnb, the Italian cooperative alternative to Airbnb, raised a million euro in 2021, kept a 15% commission of which half went to local projects, was judged by a 2025 study to risk becoming "more of the same", and went into voluntary liquidation in 2024 before its brand was bought in 2025 [49]. CoopCycle's federated delivery platform worked where there was local trust and failed where a foreign licence caused friction [49]. Mapeo, the offline-first mapping tool built with Amazonian communities, shows that community-owned map data is operationally possible phone to phone [50]. In New Zealand an employment authority ruled in 2018 that "volunteers" working forty hours a week for board and a small payment were employees owed wages [51]. *Lesson:* a cooperative that imitates the incumbent inherits its economics; host-owned data is feasible; and hosted work must be framed as hospitality, never as labour for board.

The Appalachian Trail (United States). Benton MacKaye proposed it in 1921 not as a footpath but as a project in regional planning: a trail along the Appalachian skyline; shelter camps about a day's walk apart; community camps near it on land held in common, with no lots sold and run without profit; and in time cooperative farm and forest camps to supply them — a way back to the land, to work and to health, built by volunteers, each section kept by a local group under a federation [91]. The trail was built; the community and farm camps were not. It is kept today by some thirty volunteer clubs, each with its own section — from 2.2 miles to more than 280, many assigned in the 1920s and 1930s — coordinated by the Appalachian Trail Conservancy, with the National Park Service holding overall responsibility and a memorandum with each of the fourteen states [92]. To protect it, the National Trails System Act of 1968 and its 1978 amendments set out to acquire a corridor. Compulsory purchase met hard resistance from landowners; the 1978 bill made it a last resort behind negotiation and easements, and where an owner refused the route moved to a willing neighbour [93]. It is also a wilderness-recreation trail on largely public land, the frame this paper refuses for the Carpathians; its lessons lie in its structure and its history, not in its picture of nature. *Lesson:* the walking part of a vision finds volunteers and money, and the living part is dropped unless it is held from the start; a federation of section-keepers can hold a trail for a century; and a corridor bought or imposed from above turns the people inside the line against it — a corridor has to come from their consent.

Lesson	From	What Pathways does
Budget for maintenance first	Via Transilvanica	The path is held by stewards and the Curator; no infrastructure is built that no one is named to keep
Name a person per stretch	KČT, KST, the Gorgany	The pathway steward
Design the steward before the grant	Via Dinarica	Curator and stewards are the pilot's first work; funding goes to people before software
Confirm travelers exist before building beds	Goodwin & Santilli	Hosts offer what they already have; nothing is built for pilgrims
Meals and workshops carry village income	ODI	Four offers, not lodging alone
Contribution needs a cost-carrier	Camino donativo	A contribution is defined in the agreement (§8), as proposed wording; who carries its cost after a grant is open (§12)
A label must be able to expel	Bergsteigerdörfer	The Curator holds or declines to suggest; the agreement allows closing an account for harm
Count honestly	Via Transilvanica	Gate 4 records walked distance, time and what was missing; success is not counted in pilgrims (§12)
Frame hosted work as hospitality	NZ ERA 2018	Exchange of work is a form of payment a host may accept; the agreement must say what it is not (§10)
Do not imitate the incumbent	Fairbnb	No calendar, no ratings, no commission, no app for pilgrims
Host-owned data is feasible	Mapeo, CARE	Consent as columns, withdrawal, export; no open licence on homes (as drafted, A-2)
Keep the living part of the vision, not only the path	Appalachian Trail, 1921	The hosts and the meadows are the project; the path is what joins them (§5, §9)
A federation of section-keepers can hold a trail for a century	Appalachian Trail	A steward per stretch; the first corridor's co-creators decide how it is governed from Phase 2 (agreement §4)
A corridor imposed from above turns the people inside it against it	Appalachian Trail, 1978	Corridors as fuzzy bands drawn from consent, never parcels (§9)

8. Foundations

8.1 Ubuntu, honestly

UBEC is the Ubuntu Bioregional Economic Commons. *Ubuntu* is usually rendered through Mbiti's "I am, because we are; and since we are, therefore I am" [68]: a person becomes a person through other people, and, in Metz's formulation, "an action is right insofar as it respects harmonious relationships, ones in which

people identify with, and exhibit solidarity toward, one another" [68]. Southern African scholars have extended it to the more-than-human through the Shona notion of *ukama*, relatedness, which is the bridge between "I am because we are" and this project's "people and land are one and the same" [68]. The project uses the word with care. Its own proponents dispute its scope: some call its post-apartheid promotion an elite project whose metaphysical preconditions — small, kin-based communities — no longer hold, and others warn against generalising one "African environmental ethic" across many languages [68]. Pathways cites ubuntu as a named inspiration and a translated principle, not as a claim of equivalence, and pairs it with the Carpathians' own vernacular of neighbourliness — the *toloka*, the unpaid shared work of neighbours that built houses and brought in hay across Ukraine, is the nearest local analogue of what this paper calls an exchange of work; a guest's money contribution is not a toloka [69].

8.2 The bioregion

A bioregion "refers both to geographical terrain and a terrain of consciousness — to a place and the ideas that have developed about how to live in that place", and reinhabitation "means learning to live-in-place in an area that has been disrupted and injured through past exploitation" [77]. The critique is also on record: that bioregional writing lets nature dictate social arrangements and forgets that culture draws the lines [77]. Pathways avoids the determinism by defining its region through the places people actually share — the paths, polonynas, markets and parishes — rather than by watershed alone. The Carpathian arc is one living region across the borders of seven countries or more, and the project is bioregional before it is national: it starts in one corridor in Ukraine and is meant to cross every border on the arc, with a partner initiative in each country opening its own corridor under the same commitments on data, consent, safety and money.

8.3 The commons

Ostrom's eight design principles for enduring commons — clearly defined boundaries; rules congruent with local conditions; collective-choice arrangements; monitoring accountable to users; graduated sanctions; cheap conflict resolution; recognised right to organise; nested enterprises — have held up across ninety-one cases [78]. Read against a hospitality network, they map directly. The boundary is who counts as a host, a steward, a Curator and what is shared: routes, guest flow, data, the network's good name. Monitoring is the Curator reading every place before publishing and the steward walking the stretch. Sanctions are graduated — hold, decline to suggest, and only for serious harm close an account, after hearing the person. Conflict resolution runs talk first, then the Curator, then the lead, then a mediator. Nesting is village, corridor, arc. Collective choice is the one principle the pilot defers: in Phase 1 the project lead decides gate by gate after hearing those concerned, and the agreement promises that before Phase 2 opens the hosts, stewards and Curators of the first corridor are asked how the project should be governed from there (agreement §4). §12 names that deferral as a tension.

8.4 Hospitality, gift, contribution, price

Derrida distinguished the unconditional law of hospitality — welcome before asking a name — from the conditional laws that make it liveable, and called hospitality "culture itself and not simply one ethic amongst others" [79]. Mauss found in the gift three obligations: to give, to receive, to reciprocate; Hyde adds that "the gift must always move" and binds in a way no commodity can [80]. Between gift and price lies the *contribution*: the Camino's *donativo*, a payment that acknowledges a cost without fixing a value on the welcome. The project's four forms of payment live in that middle ground, and its one refusal — gift, named

in the first draft and dropped — awaits its reason in writing (§12). Illich's word for the whole is *conviviality*: "autonomous and creative intercourse among persons, and the intercourse of persons with their environment" [81].

9. From places to corridors

Each host speaks for their own place. Placed side by side, those places and the paths between them begin to say something none says alone: where a living culture, a landscape and its nature still hold together, and where they are most at risk. Over time the pathway will trace corridors — stretches of the arc where cultural, natural and landscape heritage need stewardship as one whole, and sensitive areas that need it comprehensively. (On Plai the word has a second, narrower use: a *corridor* there is a set of saved stretches put in walking order — the route of a journey. The corridors of this section are the broader bands of care that those routes and the places along them may in time reveal.)

These are not wilderness areas (§2). The stewardship they call for is grounded in spirituality, in connection, and in the relationships people have with each other and with the land, in the understanding that people and land are one and the same. A corridor is not drawn by the project. It emerges from the places people chose to share and speaks only for them. Where it gives a community the means to say what its land is worth before others decide it for them — before a wind farm, a resort or an accession-driven land market does — it has done its work.

Three conditions attach, and the project states them now rather than later. First, consent: a host agreed to be shown on a map, not to become evidence in a protection case; the agreement says data is held to put the network on the map, to let the Curator suggest journeys and to let pilgrims find hosts, "for nothing else", and a change in use needs each person's consent again (agreement §5, §13). No corridor draws on a host's place without a separate consent of its own, which the host may decline while staying on the map and withdraw at any time; and a corridor is shown as a broad band, never as parcels, and never with a count of consents set against the people who live inside it (decided October 9, 2026; the consent is drafted in agreement v0.6). Second, the people inside the line: a corridor traced from the network crosses land where people live who never joined it, and "speaks only for them" must stay true when the corridor is put before a ministry, the Carpathian Eight or a funder. Third, protection as pressure: a designation can itself raise land prices and ban the mowing and grazing that made the meadows; a protected landscape that only the wealthy can afford to live in has failed.

The vocabulary already exists — the Convention's cultural landscapes, IUCN's Category V, UNESCO's continuing landscape, the C8 declaration's own words [18][25][60][61]. What a corridor drawn from below adds is the one thing a designation from above cannot: the consent, place by place, of the people whose land it is.

10. Working in wartime, and within the law

The pilot begins in Ukraine during the war, and the project is designed around that fact rather than despite it. This section reports what the law and official guidance say; it is not legal advice, and the agreement already names the two legal reads that must precede the first real account and the first pilgrim.

10.1 Entry, advisories and insurance

Ukraine's airspace is closed; foreigners enter by land. Nationals of the EU, the UK, the US, Canada and other visa-free states enter on a passport, with proof of funds under Cabinet Resolution 884 [52]. Every Western government advises against travel: the UK against all but essential travel to the five western oblasts, Ivano-Frankivsk among them, and against all travel elsewhere; the US at Level 4, "do not travel"; Germany and Canada with nationwide warnings; all note that consular help is severely limited and that travel insurance may be invalidated [53]. Ukrainian sources describe medical insurance from a Ukrainian-registered insurer as required of visa-free entrants, and Ukrainian insurers sell war-risk cover with limits around 100,000 hryvnia, while most Western insurers exclude Ukraine; the primary legal basis for an insurance requirement on visa-free entry was not found and is listed as unsettled [52]. The project's answer is the one the agreement already gives: a pilgrim reads their own government's advice, understands that Ukraine is under martial law, carries what insurance they can obtain, and, if they come through the Curator, is briefed honestly before they come. The case for inviting pilgrims at all — solidarity, income where it is needed, witness — and the case against — risk to guests, burden on hosts, a home made visible — are both real. What a pilgrim from abroad is told is decided (October 9, 2026); whether to invite pilgrims from abroad at all stays a question the project keeps in view (§12).

10.2 Curfew, alerts and the border strip

Ivano-Frankivsk oblast's curfew runs from midnight to five in the morning by decision of the oblast Defence Council [54]. During an air-raid alert everyone follows the official warning and goes to the nearest shelter the host knows of; a journey pauses. The hard constraint for the first corridor is the state border. Under Cabinet Resolution 1147 as amended in December 2023, the border strip is five kilometres from the line; entering, staying or working in it needs written permission from the border detachment, decided within ten days and now issued as a QR code; settlements and mass-recreation areas are excluded, so entering a village needs no permit but leaving it into forest or polonyna does [55]. The Verkhovyna raion is a controlled border district, and Order 1663-АГ of the 31st (Chernivtsi) Border Detachment of May 2024 applies to the Zelena and Biloberizka communities: entry into the five-kilometre strip for tourism or recreation is banned without a permit, with limits on vehicles stopping or gathering at the roadside; routes to Pip Ivan Chornohirskyi, Pozhyzhevska and Lake Brebeneskul are closed or restricted, and later guidance adds Turkul and the polonynas; permits are valid a year and more than ten thousand had been issued by July 2024 [55]. Verkhovyna National Nature Park confirms that group leaders send route, dates and the passport data of participants to the detachment in advance [55]. How a foreigner obtains such a permit in practice, and which villages' surroundings fall inside the strip, no source answered; both are the Curator's to establish before any stage near the ridge is suggested, and a stage that needs a permit says so.

10.3 Hosting from the home

No dedicated law on rural tourism exists; drafts in 2021 and since were never adopted, and the sector "remains almost unregulated" [57]. What does exist is Cabinet Procedure 297 of 2006: owners of individual accommodation of up to thirty places may provide temporary lodging without registering as a business, provided they declare the income annually, keep a guest register, report statistics to the local authority and meet sanitary norms; an individual pays personal income tax at 18% plus the military levy, now 5% [57]. A host who prefers to register as a sole proprietor may offer hotel services under the simplified tax system

[57]. Whether a household serving meals to paying guests must register a food facility under Law 771/97, and how the tourist tax applies to a non-registered host, are grey zones [57]. No licence is required of a local guide; licensing applies to tour operators only [58]. The project cannot check any of this for a host and must not seem to: the agreement says each host answers for their own (§8), and the project review asks that the Curator say so plainly at the first visit.

10.4 Money, and what the project is not

A payment for a bed or a meal is income from services whatever it is called; a genuine gift from a non-relative is taxed to the recipient, at a higher rate when the giver is a non-resident, so calling a contribution a gift brings no advantage [58]. Barter is lawful and in-kind income is taxable at fair value; community currencies have no legal status, the hryvnia being the sole legal tender, which is why "ubec-pay or a community currency" names a form of payment a host may accept and not a payment system the project runs [58]. A foreigner's exchange of work for board raises questions of work permits and volunteer law that remain unsettled, and the New Zealand precedent in §7 shows what happens when hosted work is treated as labour [51][58]. Under Ukraine's Law on Tourism a *tourist product* is a pre-arranged combination of two or more services sold at a set price, and only tour operators are licensed [58]. The project intends to sell no product and to take no booking and no money; whether a paid Curator who suggests journeys and tells hosts who is coming falls within that definition is the first question for the Ukrainian legal read. The EU's Package Travel Directive applies to traders and excludes "packages and linked travel arrangements offered, and linked travel arrangements facilitated, occasionally and on a not-for-profit basis and only to a limited group of travellers" [58]; whether a standing network is "occasional" is for the same read. The agreement says that the project, its Curators and its stewards "do not collect payment for stays, meals, guidance or workshops, and take no share of it", with payment passing directly from pilgrim to host (decided October 9, 2026). The shape is to be confirmed by someone who knows Ukrainian tourism law before the first pilgrim.

10.5 Data, in Germany and in Ukraine

The data sits on UBEC's own server in Germany, in Plai's own database apart from every other project's. A published home location is personal data under both the GDPR, which names location data, and Ukraine's Law 2297-VI [56]. Ukraine's law of 2010 remains in force with trivial fines; the GDPR-aligned replacement passed first reading in November 2024 and in mid-2026 was still awaiting its second, and adopting it is a benchmark of accession Cluster 1, opened in June 2026 [56]. There is no EU adequacy decision for Ukraine; transfers to Germany are permitted under Ukraine's law because Germany is a party to Convention 108 [56]. The intended basis is consent: the agreement accepted with every entry, and a tick of its own for each contact detail and the photo, each withdrawable. Whether that suffices, and under which law, is for the data-protection read. Whether a controller based in Ukraine who collects EU pilgrims' details falls under the GDPR's extraterritorial reach and needs an EU representative is for the data-protection read the agreement already requires before the first real account.

11. Where the project stands

Honesty about the stage is part of the design. On October 13, 2026:

What exists. The proposal in English and Ukrainian; a user manual for entrants and curators in both languages with the screens as they are; a co-creator agreement for every role — host, steward, Curator, pilgrim, contributor, partner initiative, funder, administrator — in both languages, as a draft with three items open (A-2, A-5, A-6) and one passed to the core body (A-4); a reasoning document; and, on Plai, the Carpathian base map, the entry surface with consent as columns, the host fields, host places shown to the

public, the photo, the agreement tick on every entry, and a published place clicked in a browser carrying every host field, with a link that opens the point in the reader's own map app; the pathway planner, public on Plai, with stretches and corridors saved, versioned and published by the Curator (October 11 to 13; Gate 5, taken before Gate 3); the project's site, tcp.ubec.network, carrying this paper, the proposal, the overview and the agreement in English and Ukrainian, the first three in German and Polish too; and the record, public. Gates 0, 1 and 2 — decisions, Plai in a browser, host fields — are closed on dated record.

What does not exist. Any host or pathway steward by name — the first Curator is the project lead for now, until a core body is formed; any real account. Backups with an off-host copy, which is the service's own condition for the first real account. A mailer, so a forgotten password is reset by the administrator once the request is confirmed with its owner. A legal body: the documents name the three initiators, UBEC, Zhyva Khata and Tepla Gora, but neither tree names a legal form for the project, and the controller of every host's data is today the project lead personally. A decided budget: a pilot of eighteen months at about €25,700 is recommended in the proposal, not decided. The software is ahead of the agreements between people — the right order for a map, since the consent model had to be proven before anyone was asked to trust it — and Gate 3, the first hosts, is the first gate whose work is a promise made to a person. A reading of the Ukrainian texts by people in the corridor.

The risks the project has named for itself, in its own review: the service depends on one person, in wartime, and no deputy is yet named; no legal body; hosts' own obligations under tax and martial law; wartime knowledge held by Curators with a written duty of confidence only in the draft agreement; a home shown at its exact point is an address, and showing it must be the host's informed choice; paid roles with no terms yet; people in photographs and stories.

The gates ahead. Gate 3: three to five hosts in the corridor, entered with the Curator beside them, one Curator named — after backups. Gate 4: the corridor walked end to end, recording walked distance and time per stage, what was missing, and what a pilgrim needed and did not have. Gate 5, the planner public, was taken before Gate 3 (decided October 11, 2026): the page, the service and saving run on Plai, and the stages walked at Gate 4 become its test cases. A gate opens on the work being done, not on a date.

12. What is open

The project keeps its tensions in view rather than resolving them on paper. The reasoning document sets out twelve; the paper names the ones a reader outside the project should know.

- **The map against "no performance".** A pin that says "a workshop" invites its host to become what the pin says. Honest offer, no calendar, no ratings and a Curator who reads every place before publishing are the guards; who says so when a host begins to perform, and what follows, is open.
- **Paid, but not a transaction.** What makes a contribution different from a price, in words a host and a pilgrim would both recognise; and why gift was not among the four forms.
- **The Curator's power.** The memory of the path also decides who appears on it. The first Curator is the project lead, named before the first hosts; the core body decides thereafter, and later Curators are named by all co-creators (October 9, 2026). What a host passed over can do is open; the agreement's dispute route is the first answer.
- **Organic growth that began from outside.** The map was built before there were hosts, by an initiative led by one person. What passes to the corridor, and when — for instance the corridor's own Curators choosing the next corridor — is the governance question Phase 2 must answer.
- **Enough.** How many pilgrims a host or a village can receive before encounter becomes throughput; capacity per offer is the first guard; there is no fixed ceiling, and the Curator keeps an overview of the carrying capacity of each host, each stretch and the pathway (October 9, 2026).

- **The map as a buyer's guide.** In a rising market a map of old houses at their exact points is also a scouting list. A host may place their point at a nearby meeting place and tell pilgrims the rest in person; it is the host's own choice, and nobody proposes it to them (October 9, 2026).
- **Newcomers.** Whether those who come to live and learn host on the same terms as those who were born there, and how the project speaks of them.
- **Consent for corridors, the people inside the line, protection as pressure** (§9).
- **Pilgrims in wartime.** What a pilgrim from abroad is told is decided (OI-P12, October 9, 2026): they prepare themselves at home, and the Curator repeats it to those who come through the Curator. Whether to invite pilgrims from abroad at all while the war lasts stays in view.
- **Pilgrimage.** The word is kept, in the name Pilgrim of the Plai (§4.3); whether the project says outright that it borrows no one's faith is still open.

What is not yet known, and what the first visits must learn: the age of the corridor's landholders and what happens to their land; how many newcomers have settled in its villages and why; what accession is already doing to land prices in the Ukrainian Carpathians; whether the Carpathian Eight will take up heritage and nature and whether it will hear communities directly; and what the corridor's own people call the stewardship this paper describes, in their own words, from which the Ukrainian text should come.

What success would look like (proposed). Hosts still hosting after three seasons on their own terms and saying it was worth it; a young person learning a craft or a meadow's work because the path brought them together; Curators and stewards who are people of the corridor and choose the next corridor themselves; pilgrims' money staying in the villages; a community using what the pathway shows to speak for its own land in a decision about it. **What failure would look like:** costumes and staged meals; prices along the pathway rising faster than around it, and houses on the map bought by people who found them there; one village saturated while others see no one; a Curator become an agent; and the project described by how many pilgrims it moved. Neither is counted in pilgrims. Behind both stands one regenerative test (§5): is this place more alive, and more able to go on, than it was before the pathway?

13. What is asked

Of funders. Support for the pilot goes to people on the ground first and software second, because the map already exists: finding and visiting hosts and sitting beside them while they enter; a paid first Curator under a written arrangement; walking the corridor and assessing each stage; the two legal reads; translation; hosting, backups and the safeguards that keep host data private. Funding gives no say over what is published or which journeys are suggested, and no access to hosts' or pilgrims' data; what came in and what it was spent on is to be reported at each gate (draft agreement, the funder's part). The budget is recommended, not decided (proposal, Funding), and the project will not promise a host an income it cannot show. What is asked is funding for regeneration rather than mitigation: not a reduction in tourism's harm, which the resorts can fund themselves, but the capacity of a few places to continue, measured by the signs in §12.

Of partner initiatives along the arc. A corridor in any of the arc's other countries — which ones is itself open (OI-P11) — opened under the co-creator agreement or a version of it that keeps its commitments on data, consent, safety and money, with its own hosts, stewards and Curators in its own language, its data held under the same consent and handed over in full if the corridor goes its own way.

Of mountain communities and their councils. Not endorsement but attention: a reading of this paper; word passed to people who already host, teach, herd or mow that the project exists and how to reach it, so that they decide for themselves whether to come forward; and the questions a village would want answered before any of its people appear on a map.

Of the Carpathian Eight and the Carpathian Convention. The C8 declaration commits its signatories to cultural landscapes, the traditional way of life of mountain communities and shared cultural routes; the Convention has treated nature and culture together since 2003 and Ukraine will hold its presidency after COP8. Pathways is one concrete form that commitment can take, built from the communities outward, and it asks to be heard as such: as the places of named hosts and the paths between them, shown with their consent and speaking for no one else — never as what a community wants, which only a community can say.

Of anyone. The project's documents, its code and the record of every decision, with its date, are open in the public repository `ubeccommon/trans_carpathian_pathways`; its agreement is written in plain words on purpose; and anyone may propose. Contact: Michel Garand — stewardship@ubec.network.

Appendix A — The project's documents, reviewed

All in the public repository `ubeccommon/trans_carpathian_pathways`, documents under CC BY-SA 4.0 and code under AGPL-3.0-or-later. Read for this paper on October 9, 2026, at the versions below; the repository holds the current ones.

Document	Version	What it holds
Starting prompt	v0.21	Load order, every decision with its date, roles, the first corridor, gates, open items; the source of truth
Proposal (EN, UK, PDF)	v0.2	The outward summary: need, response, who it serves, the corridor, Plai, principles, safety, roadmap, funding, how to take part
Host-fields specification	v0.5	What a host point carries on Plai and how it is proven
Mapservice state review	v0.1	The stack Pathways runs on, read before any change
Project review	v0.1	Eight drifts, eleven risks, what the agreement must settle
User manual (EN, UK, PDF)	v0.3	Entering a place and curating, screen by screen, with what the stack cannot yet do
Co-creator agreement (EN, UK, PDF)	v0.2	What every role promises; seven items open before signing
Reasoning	v0.1	Why: roots, the two forces, corridors, each principle's reason, twelve tensions

Where the documents differed from the decisions. On October 9 the proposal was at v0.2, and the project's own review of October 8 had recorded four drifts in it (D-2, D-3, D-4, D-6); proposal v0.3 corrected all four the same day, and the reasoning document's §5 is now the one list of principles.

What this paper adds that no document yet held. The pressures in figures with sources (§1); the grassland evidence for "not wilderness" (§2); the case for regeneration against sustainable development, with its diagrams (§5); the comparable projects and their lessons (§7); the legal frame in one place (§10); and the ask (§13). Where it has drawn on the project's own words it has kept their meaning; where it proposes, it says so.

Sources

Read October 9, 2026. Figures from secondary compilations are marked; items marked *unverified* could not be confirmed from a primary source.

The region

1. Ekonomichna Pravda, "Буковель дорожчий за Київ", June 2026 (the cited page could not be re-fetched at checking; the text is confirmed word for word in a copy dated 23 June 2026) — https://epravda.com.ua/biznes/karpati-ta-bukovel-yak-zrostaye-investiciyna-neruhomist-i-pributki-kurortu-822922/
2. Zaxid.net, "Будинок в Карпатах: скільки коштує і від чого залежить ціна", 1 October 2025 (OLX listings) — https://zaxid.net/budinok_v_karpatah_skilki_koshtuye_i_vid_chogo_zalezhit_tsina_n1620372
3. Novyny.LIVE, "Ціни на будинки в горах", August 2025 — https://novyny.live/neruhomist/tsini-na-budinki-v-gorakh-skilki-groshei-treba-viddati-za-pokupku-272912.html
4. Ukrainian News, "Thanks to Bukovel, the Polianytsia community has recorded its highest ever tourist tax revenues", 12 June 2025 — https://ukranews.com/en/amp/news/1087356-thanks-to-bukovel-the-polianytsia-community-has-recorded-its-highest-ever-tourist-tax-revenues
5. Ivano-Frankivsk oblast tourism department, "Туризм Івано-Франківської області 2025" (visitor figures from 2020 are departmental estimates) — https://speakerdeck.com/iftourism/turizm-ivano-frankivskoyi-oblasti2025
6. Ekonomichna Pravda, "Відвідуваність українських курортів зросла до 40% на зимові свята", January 2025 — https://epravda.com.ua/biznes/vidviduvanist-ukrajinskih-kurortiv-zrosla-do-40-na-zimovi-svyata-802063/
7. Suspilne Ivano-Frankivsk, "У яких громадах Івано-Франківщини живуть найбільше переселенців", 21 May 2025 — https://suspilne.media/ivano-frankivsk/977307-u-akih-gromadah-ivano-frankivsini-zivut-najbilse-pereselenciv/; Suspilne, 9 February 2021 — https://suspilne.media/102967-pereselenci-na-prikarpatti-so-kaze-statistika-cerez-7-rokiv-vid-pocatku-vijni/; raion populations: Wikipedia "Kosiv Raion", "Verkhovyna Raion" (compiled from Ukrstat estimates; secondary); Lozynskyy & Zubyk, "Transformation of the Rural Settlement Network in the Carpathian Region of Ukraine (1989–2020)", *European Countryside* 14(2), 2022 — https://doi.org/10.2478/euco-2022-0014; Teslyuk & Rushchyshyn, *Herald of Khmelnytskyi National University* 296(4), 2021 — https://heraldes.khmnu.edu.ua/index.php/heraldes/en/article/view/1607
8. Suspilne Ivano-Frankivsk, "Як на Франківщині зменшується чисельність корів", 13 March 2025 — https://suspilne.media/ivano-frankivsk/968067-ak-na-frankivsini-zmensuetsa-ciselnist-koriv-statistika-z-1991-roku/; ZN.ua, "Біле золото Карпат", 20 September 2019 — https://zn.ua/ukr/business/bile-zoloto-karpat-324136_.html; UkrAgroConsult, "На Прикарпатті відроджуватимуть вівчарство", 5 September 2022 — https://ukragroconsult.com/news/na-prykarpatti-vidrodzhuvatymut-vivcharstvo/
9. Texty.org.ua, "Карпати 3D", c. 2017 — https://texty.org.ua/d/carpathians-3d
10. LB.ua, "Джипер високогір'я", 3 August 2026 — https://lb.ua/society/2026/08/03/756098_dzhiper_visokogiryi_tse_ruskiy.html
11. Vikna.tv, "Держава повернула 20 ділянок лісу біля Буковелю", 6 March 2026 — https://vikna.tv/dlia-tebe/novyny-ukrayiny/derzhava-povernula-20-dilyanok-lisu-bilya-bukovelyu-rishennya-sudu/amp/
12. Bruno Manser Fonds, "The Svydovets Case", June 2019 — https://en.forumcivique.org/kampagnen/forest/report_the_svydovets_case.pdf
13. CEE Bankwatch Network, "Ukraine's Mount Runa at risk", issue paper, 27 August 2026 (updated 25 September 2026) — https://bankwatch.org/wp-content/uploads/2026/08/2026_08_Issue-Paper_Ukraine-s-Mount-Runa-at-risk.pdf
14. Government of Ukraine, report to the Bern Convention Standing Committee, file 2018/5 Skhidnyi Svydovets, 20 January 2025 — https://rm.coe.int/files-2018-5-ukraine-skhidnyi-svydovets-2025-gov-2757-1931-8795-1/1680b4b790
15. Ukrainian Nature Conservation Group, "High-level meeting called to address Carpathian wind farm crisis", 2025 — https://uncg.org.ua/en/high-level-meeting-called-address-carpathian-wind-farm-crisis/; Derevo.ua, "How the War is

Changing the Ecological Balance of the Carpathians" — https://derevo.ua/en/publication/vijna-zagostrila-ekologichni-konflikti-v-3801

16. Ukrainian News, "'The Forest Republic': How Logging Interests in Zakarpattia Are Blocking Investment Projects", 2025 — https://ukranews.com/en/amp/news/1076072-the-forest-republic-how-logging-interests-in-zakarpattia-are-blocking-investment-projects-to-keep
17. European Pravda, "Zelenskyy announces new format for cooperation with neighbours: the Carpathian Eight", 18 September 2026 — https://www.eurointegration.com.ua/eng/news/2026/09/18/7245769/
18. President of Ukraine, "Declaration of the Summit of the Carpathian Integration Initiative", 18 September 2026 — https://www.president.gov.ua/en/news/deklaraciya-samitu-karpatskoyi-integracijnoyi-iniciativi-106445
19. Kyiv Post, 18 September 2026 — https://www.kyivpost.com/post/84863 and https://www.kyivpost.com/post/84833; Reuters via Internazionale, 19 September 2026 — https://www.internazionale.it/ultime-notizie-reuters/2026/09/19/zelenskiy-launches-carpathian-eight-initiative-on-trade-security; Ministry of Economy of Ukraine, panel "Єдиний карпатський простір", 22 September 2026 — https://me.gov.ua/News/Print/ec56852e-bdba-46a7-9ab1-30aaaed8fb29?lang=uk-UA
20. AFP via Courthouse News, 22 September 2026 (Hungary's representation and its Foreign Ministry's statement); signatories from the declaration text [18]
21. President of Ukraine, meeting with heads of mountain hromadas, 13 August 2026 — https://www.president.gov.ua/en/news/prezident-obgovoriv-iz-predstavnikami-girskih-gromad-vikliki-105813
22. OSW, "Ukraine: two years of free trading in arable land", 17 July 2023 — https://www.osw.waw.pl/en/publikacje/analyses/2023-07-17/ukraine-two-years-free-trading-arable-land; Mondaq on Romania's Law 17/2014, 28 January 2014 — https://www.mondaq.com/Article/452626
23. Demagog.pl, "Problem własności gruntów rolnych: wnioski dla Ukrainy z polskiej drogi do UE", 8 April 2026 — https://demagog.org.pl/analizy_i_raporty/problem-wlasnosci-gruntow-rolnych-wnioski-dla-ukrainy-z-polskiej-drogi-do-ue/
24. Bórawski et al., *Land Use Policy* 82 (2019) 486–496 — https://doi.org/10.1016/j.landusepol.2018.11.027; Warsaw Business Journal, "Real estate and land prices are breaking new records in Zakopane", 29 December 2021 — https://wbj.pl/real-estate-and-land-prices-are-breaking-new-records-in-zakopane/post/133108; Butnaru, "The impact of liberalization on the Romanian land market", ASE Bucharest, c. 2014 — https://www.cafee.ase.ro/wp-content/uploads/2022/10/THE-IMPACT-OF-LIBERALIZATION-ON-THE-ROMANIAN-LAND-MARKET-SALES.pdf; Osservatorio Balcani e Caucaso, "The Saxons' fragile treasure", 22 September 2009 — https://www.balcanicaucaso.org/en/cp_article/the-saxons-fragile-treasure/
25. Carpathian Convention (FAO/Mountain Partnership summary) — https://fao.org/fileadmin/templates/mountain_partnership/doc/4th_global_meeting_presentations/Carpathian_Convention.pdf; Government of Ukraine on COP8 and the presidency, 10 November 2025 — https://www.kmu.gov.ua/en/news/ukraina-hotuietsia-do-prezydentstva-v-karpatskii-konventsii
26. InforMEA, Protocol on Sustainable Tourism — https://www.informea.org/en/treaties/protocol-sustainable-tourism/decisions
27. InforMEA, decision COP4/7 on cultural heritage and traditional knowledge, 2014 — https://www.informea.org/en/decision/cop47-cultural-heritage-and-traditional-knowledge
28. ReHERIT, heritage profile of Kosiv, 2020 — https://reherit.org.ua/wp-content/uploads/2020/08/Kosiv_profil-spadshhyny_REHERIT.pdf
29. UNESCO, "Tradition of Kosiv painted ceramics", Representative List 2019 — https://ich.unesco.org/en/RL/tradition-of-kosiv-painted-ceramics-01456
30. Discover Ivano-Frankivsk, the Kischuk family lizhnyk museum-workshop, Yavoriv — https://discover.if.ua/en/locations/muzej-majsterna-liznikarstva-rodini-kisukiv-u-avorovi
31. Suspilne, "Гуцульська коров'яча бриндза отримала географічне зазначення", 14 September 2020 — https://suspilne.media/62845-guculska-korovaca-brindza-otrimala-geograficne-zaznacenna/; Slow Food Foundation, "In defense of authentic Hutsul bryndza", 24 April 2018 — https://www.fondazioneslowfood.com/en/in-defense-of-authentic-hutsul-bryndza/
32. Ekonomichna Pravda, "3 Каховки до Косова", 2025 — https://epravda.com.ua/biznes/z-kahovki-do-kosova-809595/

The landscape

33. Janišová et al., "Agricultural legacy shapes plant diversity patterns in mountain grasslands of Maramureș and Bukovina", *People and Nature* 6(6), 2024 — https://doaj.org/article/9caebdd433aa40af98967f90d8c0b455
34. Kricsfalusy, "Mountain grasslands of high conservation value in the Eastern Carpathians", *Thaiszia* 23(1), 2013 — https://www.upjs.sk/public/media/9724/067-112-kricsfalusy-upr.pdf

35. Baur et al., “Effects of abandonment of subalpine hay meadows on plant and invertebrate diversity in Transylvania, Romania”, *Biological Conservation* 132(2), 2006 — https://edoc.unibas.ch/12896

36. Fischer, Hartel & Kuemmerle, “Conservation policy in traditional farming landscapes”, *Conservation Letters* 5, 2012.

Comparable initiatives

37. Via Transilvanica — Wikipedia (secondary) — https://en.wikipedia.org/wiki/Via_Transilvanica; Romania Insider, 10 September 2025 — https://www.romania-insider.com/via-transilvanica-norway-grants-pislaru-sept-2025

38. Ziarul Financiar, 1 August 2025 — https://www.zf.ro/via-transilvanica/via-transilvanica-mult-traseu-turistic-ajuta-dezvoltarea-zonelor-22867654; ZF, 22 September 2025 — https://www.zf.ro/via-transilvanica/via-transilvanica-drumul-uneste-comunitati-businessuri-cristina-toma-22908279; Agerpres, 14 May 2026 — https://agerpres.ro/2026/05/14/reportaj-mures-primul-modul-de-cazare-pentru-drumetii-de-pe-via-transilvanica—inaugurat-la-saparto–1556156; Economedia on The Guardian — https://economedia.ro/?p=231748; Tălpău et al., Mendel University Press, c. 2025 — https://doi.mendelu.cz/pdfs/doi/9900/08/3500.pdf

39. UNDP Bosnia and Herzegovina, Via Dinarica project pages — https://global-prod.acquia.undp.org/node/91131 and https://www.undp.org/node/442241; AICS Tirana project sheet, January 2026 — https://tirana.aics.gov.it/wp-content/uploads/2026/01/Sustainable-Tourism-for-Green-Growth-Along-the-Via-Dinarica-Trails-in-Bosnia-and-Herzegovina.pdf

40. ČT24, 17 January 2019 — https://ct24.ceskatelevize.cz/domaci/2708774-pred-130-lety-byla-v-cesku-namalovana-prvni-turisticka-znacka-sit-znacenych-tras-meri; TASR, 17 May 2026 — https://www.teraz.sk/slovensko/klub-turistov-priblizne-350-znackaro/963427-clanok.html; Noviny.sk, 13 June 2025 — https://www.noviny.sk/slovensko/1072270-hory-su-plne-turistov-znacenie-tras-je-v-rukach-dobrovolnikov-zakon-ktory-mal-upratat-chaos-sa-odklada

41. Ukrinform, 14 May 2021 — https://www.ukrinform.ua/rubric-tourism/3244990-na-zakarpatti-turistiv-zaprosuut-projti-najdovsij-marsrut-karpatami.html; Suspilne, 2 June 2021 — https://suspilne.media/135818-u-gorganah-vidnovluut-markuvanna-na-shidno-karpatskomu-turisticnomu-slahu/

42. Bergsteigerdörfer, criteria 2017 (EN) — https://www.bergsteigerdoerfer.org/files/criteria_for_mountaineering_villages_2017.pdf; criteria 2025 (DE) — https://alpenverein.it/wp-content/uploads/2026/01/Kriterien-der-Bergsteigerdoerfer-Fassung-2025.pdf; Czaja, mid-term evaluation, 2012 — https://trustsoft.uni-oldenburg.de/f/5/inst/biologie/ag/geoumwelt/zenario/Abschlussarbeiten/Masterarbeit_Iris_Czaja.pdf

43. Fundația ADEPT, Darwin Initiative final report EIDPO037, 20 May 2013 — https://www.darwininitiative.org.uk/documents/EIDPO037/23507/EIDPO037%20FR%20-%20Edited.pdf; Sigrid Rausing Trust, 2021 — https://www.sigrid-rausing-trust.org/story/biodiversity-and-environmentally-friendly-farming-in-romania/

44. Pocol et al., *AgroLife Scientific Journal* 6(1), 2017 — https://expertise.unimi.it/resource/item/563408

45. Goodwin & Santilli, “Community-Based Tourism: a success?”, ICRT Occasional Paper 11, 2009 — https://www.andamandiscoveries.com/press/press-harold-goodwin.pdf

46. Mitchell & Ashley, ODI Briefing Paper 22, June 2007 — https://cdn.odi.org/media/documents/110_yFKzu3c.pdf

47. Camino de Santiago forum, “Donativos: time for a gentle reminder” — https://caminodesantiago.me/community/threads/donativos-time-for-a-gentle-reminder.66075; Gronze, 8 May 2021 — https://www.gronze.com/articulos/camino-post-covid-albergues-mas-pequenos-mejores-servicios-y-mayor-precio-22087

48. Servas International — https://en.wikipedia.org/wiki/Servas_International (secondary); BeVolunteer statutes — https://www.bevolunteer.org/about-bevolunteer/statutes/

49. Co-op News, 16 November 2021 — https://www.thenews.coop/fundraising-year-nets-e1m-for-platform-co-op-fairbnb/; Co-op News, 7 April 2025 — https://www.thenews.coop/co-op-solutions-to-the-problems-caused-by-short-term-rentals/; TU Dresden, *Current Issues in Tourism*, 2025 — https://fis.tu-dresden.de/portal/en/publications/a-fair-airbnb-selfperceptions-in-the-fairbnb-cooperative-that-aims-to-revolutionise-the-short-term-rental-market(f6590dee-6140-4d3f-bcb4-bed375e7e532).html; Gualavisí & Vizuete-Sandoval, *Internet Policy Review* 15(1), 2026 — https://policyreview.info/articles/analysis/solidarity-coopcycle-latin-america

50. Awana Digital, Mapeo — https://awana.digital/archived-case-studies/mapeo

51. 1News, “ERA rules that Christchurch farm exploited volunteer workers”, 11 January 2018 — https://www.1news.co.nz/2018/01/10/era-rules-that-christchurch-farm-exploited-volunteer-workers-fed-them-spoiled-meat

The legal frame

52. Pravdop, “Правила въезда в Украину для иностранцев в 2026 году”, January 2026 — https://pravdop.com/en/publications/kommentarii-zakonodatelstva/pravila-vezda-v-ukrainu-dlya-inostrancev-v-2026-godu-kak-izbezhat-otkazov-i-proyti-granicu-bez-riskov-01-2026-137/; Minfin, 12 January 2026 — https://minfin.com.ua/ua/amp/2026/01/12/166090510/ (insurance requirement for visa-free entry: *unsettled*)

53. UK FCDO travel advice, 14 August 2026 — https://www.gov.uk/foreign-travel-advice/ukraine; US Department of State, 3 September 2026 — https://travel.state.gov/en/international-travel/travel-advisories/ukraine.html; Auswärtiges Amt, 9 October 2026 — https://www.auswaertiges-amt.de/de/reiseundsicherheit/ukrainesicherheit-201946; Government of Canada — https://travel.gc.ca/destinations/ukraine

54. Visnyk NANU, "Комендантська година Івано-Франківськ: актуальні правила 2026", 18 August 2026 (secondary; to be confirmed against the oblast order) — https://visnyk-nanu.org.ua/komendantska-godyna-ivano-frankivsk-aktualni-pravyla-2026/

55. Suspilne, "У ДПСУ розповіли деталі у змінах щодо прикордонного режиму", 16 December 2023 — https://suspilne.media/640822-u-dpsu-rozpovili-detali-u-zminah-sodo-prikordonnogo-rezimu/; Focus, 16 July 2024 — https://focus.ua/uk/eksklyuzivy/657923-zaborona-na-karpati-kogo-ne-pustyat-u-gori; TSN, 19 October 2025 — https://tsn.ua/tourism/iaki-dokumenty-potribno-maty-dlia-toho-shchob-pity-v-hory-poblyzu-kordonu-perelik-2937875.html; Verkhovynskyi National Nature Park — https://verkhovynskyi-park.in.ua/en/activity/

56. RecordingLaw, Ukraine data privacy laws, 2026 — https://www.recordinglaw.com/world-laws/world-data-privacy-laws/ukraine-data-privacy-laws/; DSLUA digest, June 2026 — https://dslua.org/wp-content/uploads/2026/07/media_jun26.pdf; EDPB Guidelines 3/2018 on territorial scope — https://edpb.europa.eu/sites/edpb/files/files/file1/edpb_guidelines_3_2018_territorial_scope_en.pdf; LegalAid.ua on property purchase by foreigners, 7 January 2025 — https://legalaid.ua/ua/kupivlya-neruhomosti-inozemczem-v-ukrayini-osnovni-aspekty/

57. DTKT consulting, "Зелений туризм: чи є податкові пільги?", 23 May 2023 — https://consulting.dtkt.ua/taxation/other/19536-zelenii-turizm-ci-je-podatkovi-pilgi; Verkhovna Rada, 29 April 2021 — https://www.rada.gov.ua/news/Povidomlennya/207789.html; Suspilne, 29 April 2021 — https://suspilne.media/126865-rada-poperedno-pidtrimala-zmini-do-zakonu-pro-turizm-so-voni-peredbacaut/; Derzhprodspozhyvsluzhba Ternopil, 25 April 2023 — https://dpss-te.gov.ua/news/shcho-potribno-ekspluatatsiinyi-dozvil-chy-derzhavna-reiestratsiia-potuzhnostei-operatora-rynku

58. Law of Ukraine "On Tourism", art. 1 and 17 — https://protocol.ua/ua/pro_turizm_stattya_1/ and https://protocol.ua/ua/pro_turizm_stattya_17/; Jurliga on gift taxation, 20 September 2021 — https://jurliga.ligazakon.net/news/206312_otrimano-podarunok-podatkvts-poyasnili-shcho-neobkhdno-znati; DTKT on barter, 12 March 2025 — https://news.dtkt.ua/accounting/automation/96844-ci-moze-fizosoba-zagalnik-zaimatisia-barterom; Directive (EU) 2015/2302, art. 2(2) — https://www.legislation.gov.uk/eudr/2015/2302/article/2/2020-12-31/data.htm

59. Euronews, 17 March 2026 — https://www.euronews.com/my-europe/2026/03/17/; European Pravda, 16 June 2026 — https://www.eurointegration.com.ua/eng/news/2026/06/16/7239763/; European Pravda, 29 September 2026 — https://www.eurointegration.com.ua/eng/news/2026/09/29/7246508/

Theory and frameworks

60. Dudley (ed.), *Guidelines for Applying Protected Area Management Categories*, IUCN 2008; Dudley, Phillips, Amend, Brown & Stolton, "Evidence for Biodiversity Conservation in Protected Landscapes", *Land* 5(4):38, 2016 — https://www.mdpi.com/2073-445x/5/4/38; Locke & Dearden, *Environmental Conservation* 32(1), 2005

61. UNESCO, Report of the Expert Group on Cultural Landscapes, La Petite Pierre, 1992, ¶38–40 — https://whc.unesco.org/archive/pierre92.htm; *Operational Guidelines*, Annex 3

62. Maffi, "Linguistic, Cultural, and Biological Diversity", *Annual Review of Anthropology* 34, 2005, p. 601 — https://www.cbd.int/financial/doc/maffi_linguistic_cultural_biological_diversity.pdf

63. MacCannell, "Staged Authenticity", *American Journal of Sociology* 79(3), 1973, pp. 596–597

64. Wang, "Rethinking authenticity in tourism experience", *Annals of Tourism Research* 26(2), 1999

65. Blackstock, "A critical look at community based tourism", *Community Development Journal* 40(1), 2005

66. Dredge, "Regenerative tourism: transforming mindsets, systems and practices", *Journal of Tourism Futures* 8(3), 2022 — https://www.emerald.com/jtf/article-pdf/8/3/269/1662658/jtf-01-2022-0015.pdf

67. Turner & Turner, *Image and Pilgrimage in Christian Culture*, Columbia University Press 1978, p. 20

68. Mbiti, *African Religions and Philosophy*, Heinemann 1969; Metz, "Toward an African Moral Theory", *Journal of Political Philosophy* 15(3), 2007 — https://philarchive.org/rec/METTAA; Le Grange, "Ubuntu, Ukama and the Healing of Nature, Self and Society", *Educational Philosophy and Theory* 44(S2), 2012; Matolino & Kwindingwi, "The end of ubuntu", *South African Journal of Philosophy* 32(2), 2013; Gwaravanda in Chemhuru (ed.), *African Environmental Ethics*, Springer 2019

69. *Toloka*: the pan-Ukrainian custom of collective voluntary labour, documented in Ukrainian ethnography; no English-language study of Hutsul guest customs specifically was found — the primary ethnographies are Shukhevych, *Hutsul shchyna* (1899–1908) and Kaindl, *Die Huzulen* (1894)

70. Corrado, Dematteis & Di Gioia (eds.), *Nuovi montanari: Abitare le Alpi nel XXI secolo*, FrancoAngeli 2014; Solana-Solana, "Rural gentrification in Catalonia, Spain", *Geoforum* 41(3), 2010; Solé, Solana & Mendizabal, "Integration and

international migration in a mountain area: the Catalan Pyrenees", *Journal of Alpine Research* 102-3, 2014; Moss (ed.), *The Amenity Migrants*, CABI 2006

71. Berkes, Colding & Folke, "Rediscovery of traditional ecological knowledge as adaptive management", *Ecological Applications* 10(5), 2000, p. 1252
72. Mansuri & Rao, *Localizing Development: Does Participation Work?*, World Bank 2013 — https://www.worldbank.org/en/research/publication/localizing-development-does-participation-work
73. Platteau, "Monitoring Elite Capture in Community-Driven Development", *Development and Change* 35(2), 2004
74. Rambaldi, Chambers, McCall & Fox, "Practical ethics for PGIS practitioners, facilitators, technology intermediaries and researchers", *PLA* 54, IIED 2006 — https://www.iied.org/g02957
75. Carroll et al., "The CARE Principles for Indigenous Data Governance", *Data Science Journal* 19(1):43, 2020 — https://doi.org/10.5334/dsj-2020-043
76. Scholz, *Platform Cooperativism: Challenging the Corporate Sharing Economy*, Rosa Luxemburg Stiftung 2016 — https://resources.uwcc.wisc.edu/Platform/platformcoop.pdf
77. Berg & Dasmann, "Reinhabiting California", *The Ecologist* 7(10), 1977 — https://planetdrum.org/reinhabiting-california/; Alexander, "Bioregionalism: Science or Sensibility?", *Environmental Ethics* 12(2), 1990
78. Ostrom, *Governing the Commons*, Cambridge University Press 1990; Cox, Arnold & Villamayor-Tomás, *Ecology and Society* 15(4):38, 2010
79. Derrida, *Of Hospitality*, Stanford 2000; *On Cosmopolitanism and Forgiveness*, Routledge 2001, p. 16
80. Mauss, *The Gift*, 1925; Hyde, *The Gift*, 1983, ch. 1
81. Illich, *Tools for Conviviality*, 1973 (standard citation p. 11; checked only in a secondary source)

Sustaining and regenerating

82. World Commission on Environment and Development, *Our Common Future* (the Brundtland Report), Oxford University Press 1987, ch. 2 ¶1
83. United Nations, *The Sustainable Development Goals Report 2025*, key findings — https://unstats.un.org/sdgs/files/report/2025/SDGs_Report_Key_Findings_2025.pdf
84. UNEP and UNWTO, *Making Tourism More Sustainable: A Guide for Policy Makers*, 2005, pp. 11–12
85. Interfax-Ukraine, "Буковель" on its Sustainable Development Office (Bohdan Krasavtsev), 19 May 2025 — https://interfax.com.ua/news/economic/1072976.html
86. Lyle, *Regenerative Design for Sustainable Development*, Wiley 1994
87. Reed, "Shifting from 'sustainability' to regeneration", *Building Research & Information* 35(6):674–680, 2007 — https://doi.org/10.1080/09613210701475753
88. Mang & Reed, "Designing from place: a regenerative framework and methodology", *Building Research & Information* 40(1):23–38, 2012
89. Gibbons, "Regenerative—The New Sustainable?", *Sustainability* 12(13):5483, 2020 — https://doi.org/10.3390/su12135483; Wahl, *Designing Regenerative Cultures*, Triarchy Press 2016

History

90. Стежки та мапи, "Товариство Плай" (the society *Plai*), undated, read October 9, 2026 — https://stezhky.org/stezhky/istoriya-fundacziyi-ks/prytulky/prytulok-pliscze/tovarystvo-plaj/

The Appalachian Trail

91. MacKaye, "An Appalachian Trail: A Project in Regional Planning", *Journal of the American Institute of Architects*, October 1921 — https://www.hudsonrivervalley.org/documents/d/guest/mackaye1921
92. Appalachian Trail Conservancy, "A Cooperative Approach to Managing the Appalachian Trail", undated (after 2016; 31 maintaining clubs) — https://appalachiantrail.org/wp-content/uploads/2020/04/cooperative-management.pdf; ATC, "Clubs & Partners" (30 affiliated clubs listed), read October 9, 2026 — https://appalachiantrail.org/protect/trail-management/clubs-partners/
93. Appalachian Trail Histories, "Eminent domain" — https://appalachiantrailhistory.org/exhibits/show/federal-land-acquisition–the-/eminent-domain; Appalachian Trail Conservancy, "The Appalachian Trail Bill of 1978" — https://appalachiantrail.org/news-stories/at-bill-of-1978/

This is a living document. It will change as the network grows, and every change will be written down.



УКРАЇНСЬКА

Транскарпатські стежки

Жива мережа господарів, стежок і кураторів через усю Карпатську дугу — підстави, свідчення та задум

Жовтень 2026 · UBEC / Ініціатива Карпатського хабу · Біла книга, проєкт v0.11

Як читати цю книгу

Транскарпатські стежки мають пропозицію, яка каже, що це таке; стартовий промпт, який фіксує, що вже вирішено; угоду співтворців, яка каже, що обіцяє кожен її учасник; і документ про підстави, який каже, чому. Ця книга зводить їх разом для читачів поза проєктом — донорів, партнерських ініціатив уздовж дуги, гірських громад та їхніх рад, інституцій, які нині планують майбутнє Карпат, — і зіставляє їх зі свідченнями: що відбувається з Карпатами, чого навчилися подібні проєкти в інших місцях, що дозволяє закон і що кажуть дослідження про зустріч, автентичність і догляд за обжитими ландшафтами.

Тут трапляються три види тверджень, і їх розведено. **Рішення** — це рішення проєкту, ухвалені й датовані в його репозиторії; на них так і посилаються. **Свідчення** походять із джерел, пронумерованих у квадратних дужках і перелічених наприкінці; де цифру не вдалося підтвердити з первинного джерела, текст про це каже. **Пропозиції** позначено як пропозиції; ніщо в цій книзі не стає вирішеним від того, що тут написане. Проєкт малий і на ранньому етапі, і ця книга не вдає інакшого: §11 прямо каже, що існує, а що — ні.

Стисло

Карпати переоцінюють ззовні швидше, ніж зсередини. Курортна нерухомість у Буковелі тепер продається дорожче за квадратний метр, ніж нові квартири в Києві [1]; надходження туристичного збору в Івано-Франківській області за чотири роки зросли в чотири з половиною рази [5]; на високогірних луках, які ніколи не знали промисловості, планують вітрові електростанції та мегакурорт [12][13]; а у вересні 2026 року Україна скликала в Буковелі перший Карпатський саміт, щоб планувати майбутнє регіону поверх кордонів, — з енергетикою й транспортом у заголовках і з задекларованим зобов'язанням щодо «культурних ландшафтів» і «традиційного способу життя гірських громад», яке досі не має жодного інструменту [17][18]. Шлях України до Європейського Союзу з часом відкриє її землю покупцям з усього Союзу; Польща й Румунія показують, що це зробило з цінами на землю та курортну нерухомість [22][23][24]. Тим часом люди, які тримають давній спосіб життя, старіють, поголів'я великої рогатої худоби в господарствах населення області з 2021 по 2024 рік скоротилося майже на третину [8], і знання, яке створило ці луки, відходить разом із ними.

Гори й приймають людей. До березня 2025 року в Косівській, Яремчанській та Ворохтянській громадах було зареєстровано близько сімнадцяти тисяч людей, яких із дому вигнала війна, — реєстрацій, не мешканців, і це біда, яку громади несуть разом із ними, а не вибір способу життя [7]. І гори заселяють наново: у Косові живе реміснича економіка з понад сотні майстерень, а його розписана кераміка внесена до списку нематеріальної спадщини ЮНЕСКО [28][29]; пастухи здобули

перші в Україні географічні зазначення для полонинського сиру [31]; родини й люди поодинці покидають міста, щоб навчитися гуцульського способу життя і жити ним, а не дивитися на нього. Багато з них — саме ті, чиєї думки не спитали, коли планували майбутнє гір.

Транскарпатські стежки стоять на боці цього другого руху. Це мережа господарів, які пропонують те, що справді мають, — нічліг, їжу, супровід, ремесло — звідти, де живуть; стежка, яка виростає з того, де ці господарі є, а не накреслена над ними; і люди, які її бережуть, — доглядачі стежки, кожен з яких дбає про свою ділянку, і місцеві Куратори, які утримують ціле й підказують — ніколи не продають — подорож кожному прочанинові плаю, як проєкт називає кожного, хто приходить (§4.3). Вона працює на Плаї — мапі всіх Карпат, керованій згодою, яку UBEC уже тримає на власному сервері в Європейському Союзі. На ній будь-хто може прокласти пішу дорогу, а те, що доглядач чи Куратор зберігає з такої дороги, стає проєктовим лише тоді, коли Куратор це оприлюднить. Тут немає календаря бронювань; проєкт угоди не додає ні рейтингу, ні комісії; оплату встановлює господар, у формах, які сам обирає, і вона йде напряму від прочанина до господаря; кожен господар володіє власним записом, а там, де запис за нього вніс Куратор чи доглядач, запис змінюють або відкликають, щойно господар попросить. Перший коридор пролягає від Ворохти через Верховину до Косова у гуцульському високогір'ї Західної України.

Аргумент книги, коротко: карпатська природа і карпатська культура — одна спадщина, створена й збережена людьми, які живуть із землею, і свідчення екології луків однозначні: луки залежать від косіння та випасу, які їх створили [33][34][35][36]. Захищати треба стосунок, а не ландшафт, спорожнілий від людей, які його створили. Подорож, яка платить за те, щоб цей стосунок тривав, — зустріч замість видобутку — єдина форма туризму, що зберігає спосіб життя, а не виставляє його; і працює вона лише тоді, коли зустріч справжня. У цьому різниця між сталістю і регенерацією (§5): сталість просить курорт чинити менше шкоди на кожного відвідувача, і курорт уже має для цього офіс; регенерація запитує, що потрібно місцю, щоб стати більше собою, а в горах, чиї луки занепадають, коли їх покинути, «менше шкоди» — не відповідь. Подібні проєкти показують, що такі мережі живуть або гинуть залежно від бюджетів на утримання, названої відповідальності за кожну ділянку, чесного підрахунку та доглядача, задуманого до того, як прийдуть гроші [37][39][41][45]. Стежки побудовано за цими уроками. З часом місця, якими діляться їхні господарі, окреслять коридори, де культурна, природна й ландшафтна спадщина потребують догляду як єдине ціле — не дика природа і не статус, наданий згори, а мапа, якою громада може скористатися, щоб сказати, чого варта її земля, перш ніж інші вирішать це за неї.

Проєкт просить підтримки насамперед для людей на місці, а вже потім для програмного забезпечення; партнерських ініціатив у кожній країні дуги; і місця в роботі Карпатської вісімки та Карпатської конвенції над підтримкою громад і культурними ландшафтами — як однієї конкретної форми, якої ця підтримка може набути.

1. Карпати на зламі

1.1 Туризм і нерухомість

Українські Карпати стали єдиним регіоном України, де війна не заморозила ринок нерухомості, а підняла його. Якісні комплекси в Буковелі починаються приблизно від $2 500 за м² з ремонтом, а деякі формати апарт-готелів сягають $6 000 — проти медіани близько $1 400 без ремонту в київських новобудовах у травні 2026 року [1]. Тиск уже не обмежується курортом. Середній будинок у Верховині в жовтні 2025 року виставляли приблизно за 1,8 млн грн, у Косові — за 1,9 млн, проти 7,1 млн у Яблуниці, 8,3 млн у Микуличині та 11,7 млн у Поляниці — громаді, на території якої лежить Буковель [2]. Це перепад шість із половиною до одного від курорту до середнього містечка першого

коридору — розрив, що нині тягне покупців до Верховини, і міра тиску, який на неї ще чекає. Верховина вже з'являється серед найдорожчих місць для купівлі будинку в Українських Карпатах: між весною й літом 2025 року ціни зросли на 10–15 % [3].

Разом із цим зріс і тиск відвідувачів. Обласний департамент туризму оцінює потік у 2,5 млн відвідувачів на рік із 2023 року, проти 2,0–2,3 млн до повномасштабного вторгнення, а надходження туристичного збору зросли з 10,4 млн грн у 2021 році до 46,2 млн у 2025-му [5]. На Новий рік 2024–25 готелі Буковеля були заповнені на 77–84 %, а кількість відвідувань Яремчанщини зросла на 30–40 % за рік; забудовники мали в планах на 2024–26 роки 45 комплексів готельних апартаментів і 108 котеджних містечок [6]. Курорт — причина того, що Поляницька громада фіксує 2,4 % безробіття і рекордні надходження туристичного збору [4], а його успіх тисне на землю навколо: у березні 2026 року суд скасував кадастрову реєстрацію двадцяти лісових ділянок столітнього бука і смереки біля Буковеля, зареєстрованих за підробленими державними актами під котеджі й готелі; прокурори посилалися на Карпатську конвенцію [11].

Шкода доходить до високогір'я. У 2026 році позашляховикові колони з тридцяти-п'ятдесяти машин продають двогодинні тури по хребтах за 3 000–4 500 грн; машини заїжджали в озеро Герашаська на Свидовці та в русла потоків, а була й спроба прорвати шлагбаум, що захищає ділянку Петрос–Говерла Карпатського біосферного заповідника; штраф для громадянина — 153–408 грн [10]. На плато Драгобрат, за підрахунком Texty.org.ua близько 2017 року, понад п'ятдесят котеджів і готелів тіснилися на хребті, ділянки було взято в оренду всередині біосферного заповідника, а нижче суцільно вирубано близько 190 га [9].

1.2 Енергетика і промисловість на високих луках

Два більші проєкти змінили б сам гірський масив. Курорт «Свидовець», який, за звітом Bruno Manser Fonds 2019 року, планують власники Буковеля, — на 1 430 га одного з найкраще збережених масивів Українських Карпат, приніс би 230 км трас, 60 готелів, 390 будинків для відпочинку і до 22 000 гостей на день у ландшафт післяльодовикових озер, пралісу і двох об'єктів Смарагдової мережі [12]. У жовтні 2024 року Верховний Суд підтвердив скасування його детальних планів, а оцінку впливу на довкілля так і не подано; справа залишається відкритою в Постійному комітеті Бернської конвенції [14]. Вітрові електростанції — новіший фронт. На полонині Руна, за даними CEE Bankwatch, будівництво 30 турбін на 156 МВт почалося до будь-якої оцінки впливу на довкілля; оцінка вийшла позитивною в лютому 2026 року, апеляційний суд у липні 2026 року визнав незаконною вирубку пралісу під під'їзну дорогу, а понад сорок гектарів уже було розчищено під лінію електропередачі [13]. «Вітряні парки України» пропонують близько 1,5 ГВт на хребтах Закарпаття, серед них і Свидовець [13]; той самий 1,5-гігаватний «карпатський вітроенергетичний кластер» презентували на саміті Карпатської вісімки у вересні [19]. Екологічні організації попереджають, що ці плани перетворили б до половини високогірної території Закарпаття на промислову зону і що нагляд за воєнного стану послабшав [15][16].

Ніщо з цього не є аргументом проти енергетики чи проти роботи в горах. Це аргумент про те, що майбутнє гір вирішують люди, які в них не житимуть, зі швидкістю, яка не лишає тим, хто живе, часу сказати, чого вони хочуть, — і що єдине спільне для всіх цих проєктів те, що вони вважають високі луки порожніми.

1.3 Дуга як політичний регіон

Карпатська конвенція, ухвалена в Києві 2003 року і чинна з 2006-го, зобов'язує сім країн — Чехію, Угорщину, Польщу, Румунію, Сербію, Словаччину та Україну — спільно охороняти й розвивати гірський масив [25]. Її Протокол про сталий туризм набув чинності 2013 року [26]; протокол про культурну спадщину був підготовлений 2014 року й так і не ухвалений [27]. Восьма Конференція Сторін запланована на кінець 2026 року, після чого Україна на рік очолить головування [25].

18–20 вересня 2026 року в Буковелі Україна започаткувала Карпатську вісімку: Україна, Польща, Румунія, Словаччина, Чехія, Австрія, Угорщина та Сербія разом із Європейським Союзом як цілим. На порядку дня були безпека, енергетика, логістика, прикордонна торгівля та «підтримка наших громад»; підписано п'ятдесят угод на понад мільярд євро, більш ніж половина — щодо сонячної та вітрової енергетики [17][19]. Декларацію підписали шість держав — Австрія, Польща, Румунія, Сербія, Словаччина та Україна [18]. Угорщина, яку Київ зарахував до вісімки, надіслала лише тимчасового повіреного у справах, не підписала і заявляє, що не є членом ініціативи; Чехія взяла участь, але не підписала [20]. Текст декларації важливий для цього проєкту. Вона спирається на Карпатську конвенцію і зобов'язує підписантів до «збереження культурних ландшафтів, традиційного способу життя гірських громад», зокрема нематеріальної спадщини, до «розвитку спільних культурних і туристичних маршрутів», до підтримки місцевих ремесел і до охорони біорізноманіття в рамках Конвенції; вона розглядає макрорегіональну стратегію ЄС для Карпат і щорічні саміти [18]. Офіційний перелік проєктів, утім, налічує 90 проєктів на $10,7 млрд, із яких на енергетику припадає $7,28 млрд, а на транспорт — $1,05 млрд [19]. Культурні ландшафти і традиційний спосіб життя мають одне речення; інструменту вони поки не мають.

Місяцем раніше Президент зустрівся з головами всіх гірських громад чотирьох карпатських областей. На порядку дня були дороги, автобуси для бездоріжжя, лісове господарство і правила туристичного збору, запобігання паводкам і ветерани; депопуляції, землі та спадщини в ньому не було [21].

1.4 Земля і Європейський Союз

Україна відкрила ринок сільськогосподарської землі для громадян у липні 2021 року і для компаній з українськими власниками в січні 2024 року; іноземці та компанії з іноземними власниками залишаються виключеними до всенародного референдуму, який за воєнного стану провести не можна [22]. До середини 2025 року власника змінили близько 636 000 га, а ціни зросли з приблизно 45 000 грн за гектар на початку 2024 року до понад 60 000 у червні 2025-го [23]. У межах населених пунктів іноземці вже можуть купувати будинки й несільськогосподарські ділянки; присадибна ділянка сільського будинку — це сільськогосподарська земля і до них перейти не може [56].

Вступ це змінить. Вільний рух капіталу — частина acquis, і кожна з країн, що вступили останнім часом, домовлялася про перехідний період, а не про виняток. Польща просила вісімнадцять років і отримала дванадцять, до 2016 року; за цей час ціни на приватну сільськогосподарську землю зросли приблизно на 690 %, і навіть у гірському Малопольському воєводстві, де зростання було найменшим, вони піднялися на 253 % між 2005 і 2016 роками [24]. У Закопаному, курортному містечку польських Татр, земля дійшла приблизно до 5 000 злотих за м², а туристичні апартаменти — до 20 000, куплені переважно як інвестиції під оренду, проти менш ніж 11 000 за варшавську квартиру [24]. Семирічне обмеження Румунії закінчилося 2014 року; у деяких місцевостях ціни підскочили до подвійного регіонального середнього, а в саксонських селах Трансильванії — де саксонське населення, за підрахунком одного журналіста, скоротилося з майже мільйона до війни до якихось двадцяти тисяч у 2002 році — історичні будинки «модернізували» пластиком і бляхою швидше, ніж можна було домогтися виконання будь-яких норм [22][24]. Кластери вступу України були неформально оголошені

відкритими в березні 2026 року, а перший формально відкрито в червні; вето однієї держави-члена все ще блокує два інші [59]. Питання не в тому, чи відкриється земля Карпат, а в тому, скільки років мають гірські громади, щоб вирішити — перш ніж вирішить ринок, — для чого їхня земля.

1.5 Люди, які її тримають

В Україні не було перепису з 2001 року, а дані про населення районів не публікують із 2022-го, тож демографія коридору відома лише в загальних рисах [7]. Косівський район скоротився з 86 615 до 83 700 осіб між січнем 2020 і 2022 року, ще до повномасштабної війни; Верховинський район має близько 30 000 людей на 1 254 км² [7]. Дослідження карпатського регіону показують, що багато гірських сіл між 1989 і 2020 роками не знелюдніли так, як рівнини, — їх утримали рекреація, ліс і закон про гірські населені пункти, — але що гірські райони Івано-Франківської та Чернівецької областей втрачають людей на користь міст і що «депопуляція і старіння сільських територій» є головною загрозою регіону [7].

Сама земля записує зміну. Поголів'я худоби в Івано-Франківській області досягло піку в 294 300 голів 2003 року; у приватних господарствах воно впало зі 109 500 у 2021 році до 76 000 у 2024-му, на 15,5 % нижче, ніж роком раніше [8]. Овець і кіз у домогосподарствах України стало менше: з понад двох мільйонів близько 2009 року до менш ніж 1,4 млн у 2019-му; об'єднання вівчарів називають причини: вівця дає молоко 120 днів, а тримати її треба цілий рік, полонинський сир продається по 100–120 грн за кілограм без охоронюваної назви, а робота важка й недооцінена [8]. Вік тих, хто ще тримає овець і косить луки, не записаний ніде, де це дослідження могло знайти; що господарі старіють і їхня земля протягом покоління змінить власника — це власне спостереження проєкту в регіоні, і §12 вносить його до переліку того, що мають з'ясувати перші візити.

2. Що таке гори: тяглий ландшафт, а не дика природа

2.1 Луки були створені

Більшість полонин — високих пасовищ, що є візитівкою Карпат, — не природні. Їх розчищали пастухи, зокрема за волоської колонізації з чотирнадцятого-п'ятнадцятого століть, «у лісах аж до межі лісу і криволісся» [34]; природні луки лежать лише вище, понад верхньою межею лісу. Їхнє біорізноманіття — продукт їхнього використання. Трансграничне дослідження 48 ділянок у восьми селах Марамуреша і Буковини, по обидва боки українсько-румунського кордону, виявило, що 78 % українських і 83 % румунських ділянок усе ще господарюються традиційно; господарювання пояснювало багатство рослин краще, ніж рельєф чи ґрунт; регулярне косіння підвищувало багатство судинних рослин, а випас — мохоподібних; а депопуляцію і скорочення поголів'я визнано рушіями зміни [33]. На трансильванських субальпійських луках зафіксовано 626 видів на всіх стадіях занедбання: судинні рослини досягали піку на кошених луках, а кожна сукцесійна стадія тримала максимум для якоїсь групи — тож найбагатший ландшафт той, який утримують одразу в кількох стадіях використання [35]. Де припиняється випас, на полонину наступає зелена вільха, і видовий склад, який будували століття використання, починає зникати [34]. Fischer, Hartel і Kuemmerle формулюють висновок для політики прямо: «природоохоронна цінність традиційних

сільськогосподарських ландшафтів часто є винятковою», збитковість веде до занедбання з одного боку або до інтенсифікації з іншого, а потрібна стратегія трансформації, яка «прагне підтримати очолювані громадами зусилля створити нові, прямі зв'язки з природою» [36].

Ось чому проєкт відмовляється від слова *дика природа* для карпатських лук і сіл. Ця рамка там емпірично хибна, навіть коли вона правильна для старого букового пралісу. Охоронюваний ландшафт, який забороняє косіння та випас, що його створили, або в якому можуть дозволити собі жити лише заможні, зазнав поразки за власною міркою.

2.2 Дві мови, якими світ уже говорить

Бачення має опору в категоріях, які визнають уряди й донори. Категорія V МСОП (IUCN), *охоронюваний ландшафт*, визначена як територія, «де взаємодія людей і природи протягом часу створила територію з виразним характером і значною екологічною, біологічною, культурною та мальовничою цінністю, і де збереження цілісності цієї взаємодії є життєво важливим для захисту й підтримання території» [60]. Вона охоплює понад половину європейського фонду охоронюваних територій; її критики справедливо кажуть, що вона не несе автоматичної цінності для біорізноманіття і що судити про неї слід за результатами, а не за статусом [60] — застереження, яке цей проєкт приймає; умови §9 і ознаки успіху та поразки в §12 кажуть, як його буде дотримано. Рамка Світової спадщини ЮНЕСКО називає *тяглий ландшафт*: такий, що «зберігає активну соціальну роль у сучасному суспільстві, тісно пов'язану з традиційним способом життя, і в якому еволюційний процес усе ще триває» [61]. Гуцульська полонинська економіка — хрестоматійний приклад. За обома стоїть поняття *біокультурного різноманіття*, «різноманіття життя в усіх його проявах — біологічному, культурному та мовному, — які взаємопов'язані в межах складної соціально-екологічної адаптивної системи» [62]. Карпатська конвенція вже розглядає природу і культуру разом у своєму тексті [25]; бракувало інструменту в масштабі села і стежки.

2.3 Знання йде, коли припиняється практика

Традиційне екологічне знання — це «накопичений корпус знань, практик і вірувань, що розвивається через адаптивні процеси і передається з покоління в покоління шляхом культурної трансмісії»; воно передається усно і через учнівство й обривається, коли припиняється практика [71]. Ось механізм, що стоїть за твердженням проєкту: зустріч тримає спосіб життя живим там, де музей не може, бо знання про луку, сир чи верстат зберігається лише тоді, коли хтось робить це поруч із тим, хто вміє. Прочанин, який вчиться, — ще один учень. Але найбільше важить той, хто лишається й переймає знання, — онук господаря, сусід чи родина, що приїхала жити в гори.

3. Люди, які тримають гори живими

3.1 Ті, хто залишився, і ті, хто прийшов

Гуцульська реміснича економіка жива і зосереджена. У Косові понад сотня приватних майстерень, десять музеїв, Косівський інститут прикладного та декоративного мистецтва і суботній базар — найбільший ремісничий ринок України; радянське художнє підприємство «Гуцульщина» колись давало роботу близько трьом тисячам людей [28]. Традицію косівської мальованої кераміки у грудні 2019 року внесено до Репрезентативного списку нематеріальної культурної спадщини людства ЮНЕСКО [29]. У Яворові родина Кіщуків тримає музей-майстерню ліжникарства і рідкісних довгошерстих овець, які дають для нього вовну [30]. На полонинах об'єднання виробників традиційних високогірних сирів, засноване 2018 року за підтримки Slow Food проти низинних підробок, здобуло перші в Україні географічні зазначення: «Гуцульську коров'ячу бриндзю»

зареєстровано у вересні 2020 року, нею опікується Асоціація карпатських ватагів у Верховині, і за перший рік сертифіковано шість полонин — Кринта, Скупова, Луковиця, Бибратківка, Згарда і Щівник [31]. Косівська програма відродження овчарства, оголошена 2022 року з метою 16 000 овець і 500 робочих місць за чотири роки, спирається на спостереження, що п'ятдесят овець дають фермерові змогу залишитися, а не їхати на заробітки за кордон; її результати ще не оприлюднено [8].

Війна принесла не лише тиск, а й людей. На березень 2025 року в Івано-Франківській області було зареєстровано 92 624 внутрішньо переміщені особи (ВПО) проти 3 829 у січні 2021 року; лише в Косівській громаді їх було 5 702, у Яремчанській — 5 605, у Ворохтянській — 5 384, і останнє число на папері приблизно дорівнює власному населенню Ворохтянської громади. Реєстрація перебільшує присутність: в одному містечку зареєстровано 1 474, а знайдено 322 [7]. Дехто залишився працювати: ательє, що 2022 року переїхало з окупованої Каховки до Косова, тепер дає роботу п'ятдесяти жінкам із міста та його сіл, кілька з яких раніше їздили на сезонні заробітки до Польщі [32]. Окрім переміщених, родини й самотні люди залишають міста, щоб навчитися гуцульського способу життя і жити ним, — спостереження, на якому тримається надія проєкту і для якого це дослідження знайшло лише окремі свідчення. Порахувати їх і запитати, чому вони прийшли, — робота для першого коридору.

Література про новоприбулих у горах чітко каже, що саме робить різницю. Дослідження Альп і Піренеїв показують, що «нові горяни» відроджують старі ремесла і відкривають «відповідальний, спільний туризм між господарями та гостями», але й те, що міські покупці піднімають ціни й витісняють молодь, що глибока дружба через межу трапляється рідко («ти завжди іммігрант») і що переселення «має бути організоване, супроводжуване, якщо не заохочуване» [70]. Новоприбулі інтегруються, а не джентрифікують, коли беруться за роботу на землі та спільну працю, коли житло не стає товаром і коли вони входять в інституції, які вже є, — сінокіс, свято, церкву, — замість будувати паралельні. Та сама межа відділяє господаря від виконавця: стосунок до місця.

3.2 Хто говорить від імені громади

Коли кажуть, що курорт чи вітропарк має підтримку місцевих, перше питання — хто це сказав і кого не запитали. Звіт 2025 року з громад Ясіня та Усть-Чорної каже, що їхні керівники й мешканці досі сподіваються на курорт на Свидовці заради податкових надходжень, які він принесе, — не кажучи, яких мешканців запитали, — і своєю чергою представляє противників курорту як тих, хто служить інтересам лісозаготівлі [16]. Кожна сторона каже, що голос громади в іншої — прикриття для інтересів. Ця закономірність універсальна. Огляд партисипативного розвитку Світового банку виявив, що участь, запроваджена згори, «часто підпорядкована елітам», якщо немає чутливого центру і довгої відданості [72]; Platteau називає захоплення елітами «серйозною проблемою» для розвитку, керованого громадою, і не знаходить ліку, який не передбачав би поступового виділення ресурсів і перевірки [73]. Партисипативне картування має власну етику: ризик «наразити людей на небезпеку через інформацію, яку вони показують», даних, які сторонні «потім використають», і «вимоги точності там, де доречнішою була б розмитість» [74].

Стежки ставлять це питання в усіх напрямках, зокрема й власним прихильникам. Проєкт не претендує говорити від імені жодного села і побудований так, щоб нікому не доводилося: кожен господар має власний обліковий запис і власний запис, дає згоду поле за полем і відкликає її, коли захоче, — або, якщо місце за нього вніс Куратор чи доглядач стежки, домагається зміни чи відкликання на першу вимогу; Куратор говорить за те, що оприлюднює; проєкт говорить сам за себе. По всіх Карпатах люди, чий голос обійшли, знаходять одні одних і знаходять ініціативи, які слухатимуть, і напруга між ними та тими, хто говорить їхнім іменем, зростає. Мережа окремих голосів, кожен з яких володіє власними словами, — відповідь проєкту на цю напругу.

4. Чому зустріч

4.1 Діагноз

Дві проблеми сходяться в Карпатах і мають одну відповідь. Подорож дедалі частіше стає видобутком: мандрівники проходять крізь місця, не торкаючись їх, гостинність дедалі частіше стає виставою, і мандрівник забирає з собою краєвид, а лишається після нього плата — здебільшого комусь, хто там не живе. Гірське життя рідшає: села втрачають людей, знання не передаються, а економіка, що тримала спосіб життя, перебралася деінде. Зустріч відповідає на обидві, бо знання переходить від людини до людини — коли щось робиш поруч із кимось — і бо прочанин, який спить під дахом, їсть за столом і вчиться, як щось роблять, залишає гроші й увагу в руках того, хто тримає знання. Господар, який ділиться тим, що справді має, здобуває причину це берегти — і засоби для цього.

Умова — щоб зустріч була справжньою. Півстоліття тому MacCannell описав туристичні місця як «інсценовану закулісну зону, свого роду живий музей», збудовану тому, що «туристична свідомість рухома бажанням автентичного досвіду» [63]. Щойно господар починає грати, платять за виставу, а спосіб життя однаково втрачається — повільніше і прибутковіше. Розрізнення Wang дає вихід: *екзистенційна* автентичність — властивість дії, а не об'єкта, і її знаходять у спільній праці, ході та їжі, а не у виставках [64]. Мережа, збудована на нічлігах, їжі, супроводі та майстер-класах, які справді в ужитку, без сцени, — спроба лишитися по цей бік межі.

4.2 Чого туризм на основі громад навчився важким шляхом

Досвід туризму на основі громад тверезить, і проєкт читає його як перелік для перевірки. Зі 116 ініціатив, які експерти визнали успішними, відповіли 28 зі 133 опитаних, 15 відповідали визначенню, і лише шість були економічно сталими; огляд 200 проєктів туризму на основі громад в обох Америках виявив, що багато помешкань заповнені приблизно на 5 %; дев'ять із п'ятнадцяти досі залежали від донорів, і автори радять переконатися, що мандрівники існують, перш ніж будувати ліжка, а залежність від донорів після п'яти років вважати тривожним знаком [45]. Критика Blackstock називає три хиби: література трактує громаду-господаря «як однорідний блок», підходить до участі «функціонально» і «нехтує структурними обмеженнями місцевого контролю» [65]. Щодо витоку доходів, Overseas Development Institute виявив, що в найкращих випадках до бідних доходить від п'ятої частини до третини туристичного обороту дестинації і що найбільший канал — не ліжко, а ланцюг постачання їжі: близько половини туристичних заробітків бідних у його кейсі Луангпхабангу [46]. Урок для мережі господарів: їжа і майстер-класи важать не менше за нічліг, а проєкт, який не може показати мандрівника, не повинен обіцяти господареві дохід.

Регенеративний туризм, нинішній передній край галузі, вимагає, щоб подорож «давала чистий плюс людям, місцям і природі», визнає, що сертифікація «дає мало», і попереджає, що без згоди та соціальної ліцензії туризм «ризикує стати брудним сектором» [66]. Проєкт читає це так: регенерація — не ярлик, а стосунок, і цей стосунок має бути видимим у самій конструкції: хто володіє даними, хто тримає маршрут, хто бере гроші. §5 протиставляє регенерацію рамці сталого розвитку, яку вона заміняє, і каже, чому Карпатам потрібна сильніша.

4.3 Паломництво до чого

Пропозиція називає стежку «інфраструктурою паломництва», і Гуцульщина має справжні місця релігійного паломництва. Слово тут вжито в тому сенсі, якого йому надає антропологія паломництва, — лімінальність, перейдений поріг, *communitas* людей, що йдуть разом, — і з осторогою Turner, що «турист — наполовину паломник, якщо паломник — наполовину турист» [67]. У кінці шляху немає

святині. Прочанин входить у стосунок між людьми й землею, що триває століттями, його приймають у нього на ніч чи на місяць, і він іде, взявши в ньому участь, а не подивившись на нього. Паломництво — до самого стосунку. Слово збережено, і воно дає проєктові ім'я для того, хто приходить: **прочанин плаю**, прочанка плаю, англійською *Pilgrim of the Plai* (слово Мішеля, 10 жовтня 2026 року). Плай — гуцульське й румунське слово для давньої стежки через полонини, якою гнали отари в гори й з гір; від нього й назва мапи, на якій працює проєкт (§6.2). *Прочанин* — від *прощі*, паломництва, яке в краї ходять і досі й відрізняють від туризму як внутрішню працю; слово споріднене з *прощати*, тож несе не лише пошук, а й примирення. Проща — до плаю і до людей, які його бережуть, а не до святині. Чи скаже проєкт прямо, що не позичає нічиєї віри, лишається серед відкритих питань у §12.

5. Від сталості до регенерації

Досі проєкт говорив про те, від чого він відмовляється і чому. Цей розділ говорить, за що він, — мовою, якою нині послуговується галузь, — і чому він обрав регенерацію замість рамки, що керувала розвитком сорок років.

5.1 Що обіцяв сталий розвиток і де він стоїть сьогодні

Сталий розвиток було визначено 1987 року як «розвиток, що задовольняє потреби нинішнього покоління, не ставлячи під загрозу здатність майбутніх поколінь задовольняти свої власні потреби» [82]. Він став рамкою конвенцій Ріо, сімнадцяти Цілей сталого розвитку та їхніх 169 завдань, ухвалених 2015 року, і словника, яким нині користується кожне міністерство, кожний банк і кожний курорт. У туризмі він набув форми, яку надали йому агенції ООН 2005 року: «туризм, що повною мірою враховує свої нинішні та майбутні економічні, соціальні й екологічні впливи, відповідаючи на потреби відвідувачів, галузі, довкілля та громад-господарів» [84].

Дві речі слід помітити в цьому визначенні, перш ніж щось казати проти нього. Це баланс між чотирма претендентами, і галузь — один із них. А його дієслова — враховувати, відповідати на потреби, мінімізувати, підтримувати. Воно запитує, як діяльність може тривати, завдаючи менше шкоди. Воно не запитує, чи ця діяльність — те, чого потребує місце.

Де стоїть ця рамка, зафіксовано документально. Власний звіт Організації Об'єднаних Націй за 2025 рік показує, що лише 35 % завдань Цілей, за якими є дані про динаміку, виконуються за графіком або з помірним поступом, майже половина просуваються надто повільно або ледь помітно, а 18 % відкотилися назад [83]. Стан справ у Карпатах описано в §1, і він має точну місцеву форму. У Буковелі працює Офіс сталого розвитку: безплатні автобуси щогодини, 0,6 мегавата сонячних панелей на дахах готелів, сім зарядних станцій, одинадцять готелів із сертифікатом Green Key, партнерство щодо низьковуглецевого транспорту [85]. Власники того самого курорту планували мегакурорт на Свидовці [12]. Окремо від цього двадцять лісових ділянок біля курорту, зареєстрованих, як установив суд, за підробленими державними актами, 2026 року повернули державі [11]; ця біла книга нічого не стверджує про те, хто їх реєстрував. Це не звинувачення в нечесності. Це те, що робить рамка: вона просить курорт завдавати менше шкоди на одного відвідувача — і задоволена, коли курорт це робить. Їй нічого сказати про те, чи долина апарт-готелів по $6 000 за м² — це те, чим долина має стати, бо «галузь» — одна зі сторін, чиї потреби ця рамка існує, щоб урівноважувати.

Саме в цьому сенсі сталий розвиток занедбано там, де він мав би кусатися. Його застосовували там, де це було зручно, — енергія, відходи, освітлення, сертифікат, — і відкладали там, де він чогось би коштував: земля, хто вирішує, для чого існує місце, чи триває спосіб життя. І його привласнили: слово, доступне будь-кому з маркетинговим бюджетом, — це слово, яке невдовзі нічого не означає. Критики всередині самої галузі кажуть те саме; власна література регенеративного туризму доходить висновку, що сертифікація сталості «мало що дає» [66].

5.2 Чого натомість просить регенерація

Регенеративний дизайн має родовід, старший за Цілі, — *Регенеративний дизайн для сталого розвитку* Lyle 1994 року [86] — і чітке формулювання в аргументі Reed 2007 року: «Сталість, як її нині практикують у збудованому середовищі, — це передусім вправа з ефективності». Він виклав траєкторію підходів, кожен з яких вкладений у більш цілісний: обмежити шкоду; потім *нейтральний*, де розташовані зелений і сталий дизайн, — «узагальнений ідеал не шкодити»; потім відновити здоров'я місцевої живої системи; потім регенерувати — «еволюція цілої системи, частиною якої ми є». Регенерація, писав він, — «єдиний спосіб підтримати сталість». І вона прив'язана до місця: робота «починається зі спроби зрозуміти, як системи життя працюють у кожному неповторному місці», а роль причетних — «створити цілісну систему взаємовигідних стосунків» [87]. Пізніші праці перетворюють це на метод: проєктування від місця, де громада, водозбір чи біорегіон є сферою, в якій люди можуть брати участь [88]; і на дослідницьку програму — регенеративну сталість як «квітучі живі системи, в яких здоров'я і добробут цілого безперервно зростають», з індикаторами, властивими кожному місцю й виробленими через співтворення, і — що незвично для галузі — з інтеграцією духовності, названою серед її умов [89]. У туризмі той самий крок — регенеративний туризм, який вимагає, щоб подорож «давала чистий плюс людям, місцям і природі», а не зменшений мінус [66].


Різниця не в амбіції, а в запитанні, одиниці та мірі.

	Сталий розвиток	**Регенерація**
Запитання	Як ця діяльність може тривати, завдаючи менше шкоди?	Чого потребує це місце, щоб стати більше собою?
Одиниця	Три стовпи, які треба врівноважити, — економіка, суспільство, довкілля	Одне живе місце, разом із людьми, вкладене в більше
Міра	Зменшений вплив, виконані завдання, компенсована шкода	Здоров'я цілого та його здатність тривати
Люди	Група зацікавлених сторін, на чиї потреби відповідають	Учасники життя місця — і ті, хто його знає
Місце	Ділянка, де застосовують загальні стандарти	Джерело дизайну, кожне інакше
Хто визначає успіх	Стандарт, сертифікатор, глобальна ціль	Місце та його люди, які разом творять індикатори
Мета	Нейтраль: жодної чистої шкоди	Чистий плюс: живіше, ніж було

Регенерація не відкидає підлоги сталості: не шкодити залишається умовою. Вона відмовляється вважати підлогу метою.

5.3 Чому регенерація — шлях уперед для Карпат

Куди веде кожен підхід

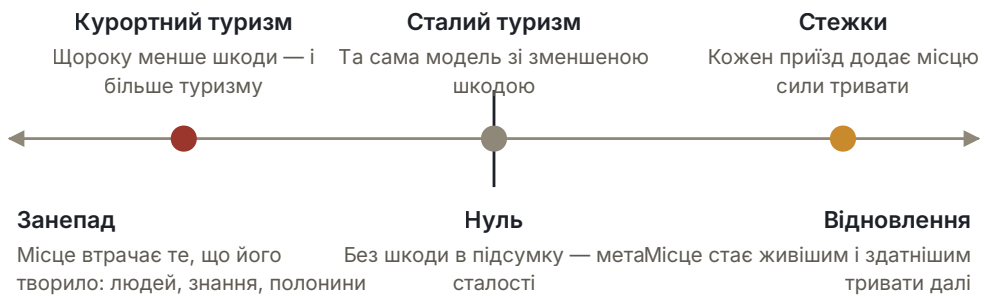

Сталість питає, як завдавати менше шкоди. Регенерація питає, що потрібно цьому місцю, щоб стати ще більше собою, і будує від цього. Перше — стеля для шкоди; друге — напрямок.

Бо нейтралі не досить там, де землю створено працею. У §2 показано, що карпатські луки залежать від косіння та випасу і деградують, якщо їх залишити самим собі. Рамка, чия мета — нульове втручання і жодної чистої шкоди, не може зберегти ландшафт, якому для існування потрібне втручання. Для тяглого ландшафту підтримувати означає стояти на місці, а стояти на місці означає втрачати. Перша діаграма розставляє три підходи на одній лінії: курортний туризм, який щороку завдає менше шкоди і робить її дедалі більше; сталий туризм — та сама модель із зменшеною шкодою, що прагне до нуля; і Стежки, чия мета — щоб кожен візит додавав місцю здатності тривати.

Що бачить кожен підхід



Вимірює
Зменшений вплив, досягнуті цілі, компенсована шкода




Вимірює
Здоров'я цілого та його здатність тривати

Бо сили тиску вже говорять мовою сталості. Вітровий кластер, запропонований Карпатській вісімці, — це відновлювана енергія. У курорту є офіс сталого розвитку. Вступ — це розвиток. Кожна з сил у §1 може назвати себе сталою, не брешучи, бо рамка врівноважує їхні потреби з потребами гір і називає цей баланс метою. Проєкт, який змагається в тому, щоб завдавати менше шкоди, уже програв цю суперечку: курортам завжди буде що зменшувати. Друга діаграма показує, що бачить кожен підхід: три стовпи, які треба врівноважити один з одним, і земля — один стовп із трьох; або живе місце, в якому земля тримає людей, а люди тримають свою економіку, і те, що рухається між ними, — це праця, знання й турбота.

Два потоки в тих самих горах

Видобування, яке сталість пом'якшує

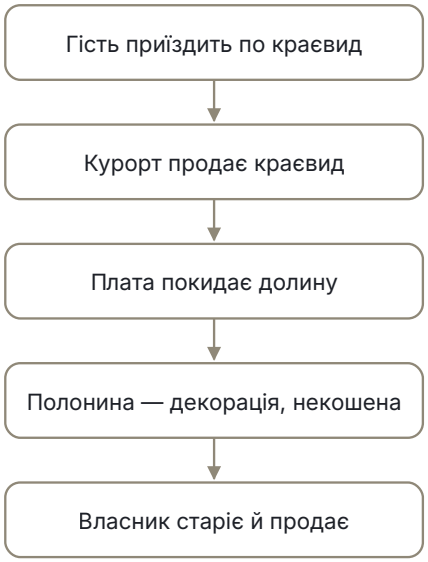

У підсумку
Менше шкоди на гостя; напрямок той самий

Регенерація, яку будують Стежки



У підсумку
Кожен приїзд додає місцю сили тривати

Бо люди, які тримають гори живими, уже це роблять. Одиниця регенерації — живе місце разом із людьми; її метод — співтворення тими, хто знає місце; її індикатори — власні індикатори місця. Це опис другої сили з §3: вівчарі, які сертифікують свої полонини, ткалі, які зберігають довгошерстих овець, новоприбулі, які вчаться косити. Третя діаграма ставить два потоки поруч. Ліворуч — лінія, яку сталість лише пом'якшує: відвідувач приїздить за краєвидом, курорт його продає, плата покидає долину, лука — це декорація і стоїть некошеною, її власник старіє і продає. Праворуч — петля, яку будують Стежки: скошена лука і ремесло в ужитку тримають знання живим через діло; господар пропонує те, що справжнє; прочанин приходить і вчиться; господар отримує причину і засоби залишитися; луку знову скошено. Чистий підсумок першого, у його найсталішому вигляді, — менше шкоди на одного відвідувача за незмінного тренду. Чистий підсумок другого — кожен візит додає місцю здатності тривати.

Бо дизайн уже регенеративний у своїх частинах. Прив'язаний до місця: один коридор за раз, його маршрут виникає з того, де є його господарі, і ніколи — з шаблону. Співтворчий: згода поле за полем, Куратор — людина з цього місця, врядування, яке має перейти до коридору. Міра цілої системи: успіх рахують не в прочанах, а в господарях, які й далі приймають прочан, у молодій людині, яка вчиться

роботи на луці, у грошах, що залишаються в селах (§12). Укорінений у стосунках і — словами §9 — у духовності, умові, яку називає Gibbons і якої більшість галузі уникає. Цей розділ додає лише ім'я для цілого — і перевірку, якої від проєкту можна вимагати.

Два застереження, щоб слово не брали задешево. Регенерацію можна привласнити так само, як привласнили сталість; у туризмі це вже маркетинговий прикметник, а власні стрес-тести проєкту, зафіксовані в його оглядах, показують, як легко підхопити його мову. Захист — не слово, а міра: місце або живіше й здатніше тривати, ніж до стежки, або ні, і ознаки успіху та невдачі в §12 — це спосіб, яким проєкт дає себе спіймати, якщо ні. І регенерація — це напрямок, а не посвідчення: ніхто її не сертифікує, і в цьому її сила проти захоплення та її слабкість перед донором, який хоче ярлик. Проєкт натомість пропонує міру.

6. Модель

6.1 Три взаємопов'язані речі

Транскарпатські стежки будують мережу господарів, живу стежку між ними та людей, які її утримують.

Господарі — це люди, які вирішують поділитися чимось справжнім із місця, де живуть. Господар пропонує одне чи кілька з переліку — нічліг, їжу, місцевий супровід і майстер-клас — і описує це так, як є: чесна пропозиція. Господарі не є постачальниками послуг. Один господар — одне місце на мапі, з переліком пропозицій і, поруч, відкритими місяцями, місткістю в малих цілих числах, мовами, якими говорить господар, і тим, як дістатися до місця — лише пішки, автомобілем, з дитячим візком, на кріслі колісному (вирішено 7 жовтня 2026 року).

Стежка не проєктується зверху. Вона виникає в міру того, як приєднуються господарі: кожен стає точкою, а шляхи між ними йдуть наявною мережею стежок і маршрутів. З жовтня 2026 року будь-хто може прокласти дорогу на Плаї — «Plan a way», від початку до кінця, спершу стежками, дорогами лише там, де більше ніщо не з'єднує, — і планувальник каже, де сумнівається: кожен розрив, який він з'єднав, кожну дорогу, якою пройшов, кожне містечко, яке перетнув. Доглядач стежки чи Куратор зберігає прокладену дорогу як *ділянку*, виправляє її на мапі рукою і складає ділянки в порядку ходьби в *коридор* — маршрут подорожі; оприлюднює лише Куратор, а пройдене й збережене стає найкращим знанням планувальника, тож мережа росте з того, чим люди справді ходять. Оглядові точки, джерела та інші місця, до яких варто дійти, наносяться на мапу як місця на шляху, а не як пропозиції.

Куратор — це пам'ять стежки, зазвичай місцевий фермер, учитель чи знавець гірських стежок: людина, яка знає стежку та її господарів, слухає, скільки часу має кожен прочанин, з ким він іде і чого хоче, радить маршрут замість приписувати його і пам'ятає, хто кого може прийняти і коли. Куратор оприлюднює те, що вносять господарі, або утримує це; зберігає знання про безпеку, яке ніколи не оприлюднюється; і, як пропонує проєкт угоди, не бере з господаря нічого за те, що скеровує прочан. Поруч із Куратором стоїть **доглядач стежки** — роль, додана 8 жовтня 2026 року: людина, яка дбає про ділянку стежки, знає її господарів і місця, може внести місце за господаря, який не може зробити це сам, додавати місця на шляху і зберігати прокладену дорогу як чернетку, а оприлюднення залишає Куратору.

Роль	Що робить	На Плаї
Господар чи господиня	Вносить власне місце або його вносять за його згодою	Обліковий запис автора запису або жодного
Доглядач стежки	Дбає про ділянку; вносить за господаря; додає місця на шляху; зберігає ділянки й коридори як чернетки	Обліковий запис доглядача
Куратор	Оприлюднює або утримує — місця, ділянки й коридори; радить подорожі; зберігає знання про безпеку; також вносить	Обліковий запис куратора та автора запису
Прочанин плаю	Прокладає дорогу на Плаї; проходить ділянку — пообіддя чи місяць — і приходить як гість	Без облікового запису

6.2 Плай: мапа, яка вже існує

Проєкт не починає з нуля. Плай — це карпатський хаб UBEC Mapservice, картографічного сервісу з відкритим кодом, який UBEC тримає на власному сервері в Німеччині, на PostgreSQL/PostGIS, MapServer і Mapbender. Уже сьогодні є: базова мапа всього Карпатського пасма з OpenStreetMap — близько 32 млн об’єктів із накладеними пішохідними маршрутами; форма внесення, де людина ставить точку саме там, де має на увазі, і описує її; згода, вбудована в базу даних поле за полем, так що куратор вирішує, що оприлюднюється, а відкликані записи зникають з кожної мапи та кожного експорту; одне фото на місце, очищене від даних про місцезнаходження та камеру перед збереженням; поля господаря, описані вище, збудовані й випробувані у браузері 7–8 жовтня 2026 року; позначка на кожному записі, що людина прочитала угоду співтворців і приймає її, із записаними версією та часом; і повний експорт у будь-який момент. Стежки — це подання записів Плаю, а не окрема система (вирішено 7 жовтня 2026 року): одне місце, де господар вносить запис, одна модель згоди, одна черга куратора. Сама назва Плаю несе в собі цю ідею (пропозиція; ще не вирішено): у мові цих гір *плай* — це гірська стежка, та, що іде хребтом від однієї полонини до іншої. Назва має попередника в історії самих цих гір: українське краєзнавчо-туристичне товариство «Плай», засноване у Львові 1924 року, поєднувало в одній організації вивчення краю, охорону пам’яток природи й археології, знакування стежок і будівництво притулків; воно збудувало те, що описують як перший український гірський притулок для туристів, — на галявині Плісце в Ґорґанах, у 1933–1935 роках [90]. Проєкт бере цю назву в тому самому дусі й не претендує на спадкоємність від товариства.

6.3 Від чого проєкт відмовляється

Без календаря. Чи приймає господар поза своїм сезоном, з’ясовують у розмові з Куратором, а не в сітці бронювання, бо календар — перший крок до сервісу бронювання, а сервіс бронювання перетворює господаря на постачальника зі слотами, які треба заповнити.

Без рейтингів (вирішено 11 жовтня 2026 року). Господарів не оцінюють балами, не ранжують і не рецензують публічно без їхньої згоди, бо оцінка вчить господаря грати на оцінку.

Без комісії (угода, §8; вирішено 9 жовтня 2026 року). Проєкт, його Куратори та доглядачі не збирають плати за нічліг, їжу, супровід чи майстер-класи і не беруть частки; Куратор не бере з господаря нічого за те, що скеровує прочан. Господар обирає для кожної пропозиції одне з: фіксований внесок, рекомендований внесок, обмін працею, ubec-pay або спільнотна (місцева) валюта (вирішено 7

жовтня 2026 року); спосіб оплати видно на мапі, а суму господар називає Кураторові, і її ніде не показують; грошей Куратор не бере й не тримає. Оплата йде напряму від прочанина до господаря (вирішено 9 жовтня 2026 року; A-3 закрито); чому серед форм немає дару — досі відкрите (§12).

Без вистави. Зустріч або справжня, або її немає. Ніхто не ставить традицію на сцені для відвідувачів.

Без алгоритму, який вирішує. Планувальник стежок пропонує; вирішує людина. Будь-хто може прокласти дорогу на Плаї, і його відповідь — пропозиція, як будь-яка інша: вона не обіцяє ні нічлігу, ні гостинності, нічого не каже про стан стежки сьогодні, а оприлюдненого господаря називає лише на ім'я і за часом, який забирає відхилення до нього. Дорога стає проєктовою лише тоді, коли Куратор її оприлюднить, а з п'ятьма господарями Куратор і далі планує на папері там, де так простіше.

Ніхто не говорить від імені громади. Господар говорить за власне місце, Куратор — за те, що оприлюднює, проєкт — за себе.

Не дика природа. Люди і земля — одне й те саме. Те, що потребує захисту, — це зв'язок між ними.

6.4 Дані залишаються з людьми

Кожна людина вирішує, що про неї показують, поле за полем; зняття позначки згоди одразу прибирає цю деталь із публічної мапи; відкликання місця прибирає його з кожної мапи та кожного експорту; будь-хто може попросити копію всього, що про нього зберігається, або видалення. Проєкт ніколи не продає і не позичає дані, не показує реклами, не відстежує відвідувачів і не передає дані нікому, включно з органами влади, якщо тільки закон не зобов'язує. За чинною редакцією (відкрите A-2) записи й фото не випускаються під відкритою ліцензією: обґрунтування огляду проєкту таке, що відкриту ліцензію не можна відкликати, тож дім господаря, випущений під нею, можна було б копіювати вічно й після того, як господар його відкликав, — у воєнний час. Автор запису зберігає всі права; UBEC має дозвіл зберігати, показувати в межах згоди, робити резервні копії та повертати, і цей дозвіл закінчується з відкликанням. Це — переклад проєктом принципів CARE для врядування даними — колективна користь, повноваження контролювати, відповідальність, етика, — які «доповнюють наявний підхід, зосереджений на даних», підходом, «орієнтованим на людей і мету» [75], і принципу платформених кооперативів, за яким дані й правила належать людям, яким платформа служить, а не її оператору [76].

7. Чого навчилися інші

Ніщо в цьому задумі не є невипробуваним деінде, і досвід порівнянних проєктів — найкорисніший учитель для проєкту. Вісім випадків і урок, який несе кожен.

Via Transilvanica (Румунія). Близько 1 400 кілометрів від Путни до Дробети-Турну-Северин, збудовано у 2018–2022 роках однією НУО, Tășuleasa Social, із понад десятьма тисячами волонтерів і тисячею вручну витесаних андезитових кілометрових стовпів; відкрито в жовтні 2022 року; відзнака Europa Nostra за залучення громадян у 2023 році [37]. Будівництво коштувало близько €1,8 млн із пожертв, свідомо без державних грошей; річний операційний бюджет нині перевищує €2,5 млн від близько 1 200 донорів та членської програми, а 300–400 кілометрів маркування потрібно оновлювати щороку [38]. Підрахунки відвідувачів розходяться — близько 30 000 у 2024 році за однією оцінкою, 37 000 за іншою, і 120 000 заявлено за 2025 рік , і джерела не кажуть, як рахували [38]. Шар господарів лишався неформальним: приватні гостьові будинки на мапі в застосунку, без оприлюдненого відбору чи стандарту, доки у 2026 році асоціація не почала будувати власні модульні міні-будинки на землі обраних родин [38]. Задокументовані результати сильні, але поодинокі: один господар — плюс 600 % гостей, «але цифри все ще малі»; одне село — з 18 до 28 мешканців і перші народини за сорок років [38]. Зростання цін на нерухомість, комодифікація та нерівна користь для сіл

на маршруті й поза ним — ризики, які несе будь-яка така стежка, і ця біла книга називає їх для Стежок у §12. *Урок:* єдина віддана організація з членською базою та волонтерами, що опікуються ділянками, може утримувати довгий маршрут без держави — але догляд є постійною витратою, за підрахунок має хтось відповідати, а шар господарів, залишений неформальним, лишає відкритим, хто ці господарі і що вони здобувають.

Via Dinarica (Динарські Альпи). Збудована на донорські кошти з 2010 року за підтримки USAID і ПРООН, потім італійської співпраці: понад тисяча кілометрів маркування, десятки відбудованих хат і гостьових будинків, гранти постачальникам, робочі місця переважно сезонні; заявлена мета другої фази — «туристичний продукт, що належить громаді та нею керується» [39]. Після близько $7 млн і дванадцяти років вона й далі залежить від донорського центру підтримки, і сама ПРООН зазначає, що громади «ще не повною мірою скористалися економічними можливостями» [39]. *Урок:* проєктуйте доглядача до гранту, а не після; «власність громади» була метою, а не результатом.

Туристичні клуби Центральної Європи. Чеський клуб KČT підтримує маркування близько 43 000 кілометрів через регіональні комісії, у яких кожному волонтерові-маркувальнику призначено ділянку і за недбалість йому роблять зауваження, з невеликою державною субсидією, без якої клуб «не впорався б» [40]. Словацький KST має близько 350 волонтерів-маркувальників і трирічну норму оновлення — близько 5 500 кілометрів на рік; у 2025 році через брак коштів він оновив 1 200, а законопроєкт про врегулювання догляду за стежками відклали [40]. В Україні Закарпатський туристичний шлях — 398 кілометрів, промаркованих у 2010 році за чеськими стандартами швейцарсько-українським лісовим проєктом — не має визначеного органу, який би його підтримував, а Східнокарпатський туристичний шлях у Ґорґанах перемаркував один волонтер — гірський рятувальник [41]. *Урок:* сторічні свідчення того, що іменна відповідальність за кожну ділянку плюс невелика стала субсидія підтримують стежку живою, а там, де бракує одного чи іншого, маркування занепадає за кілька сезонів. Доглядач стежки — це версія опікуна ділянки для проєкту.

Bergsteigerdörfer (Альпи). З 2008 року альпійські клуби Австрії, Німеччини, Італії, Словенії та Швейцарії сертифікували 43 «села альпіністів», які втілюють Альпійську конвенцію: жодного села понад 2 500 мешканців, жодної фірми понад п’ятдесят працівників, жодної лижної забудови, що з’єднує долини, з обов’язковими критеріями щодо альпійської компетентності, ландшафту та мобільності, щорічним з’їздом і виключенням села, яке опускається нижче критеріїв [42]. Оцінювання 2012 року не виявило ще вимірного зростання ночівель, зате високу обізнаність серед членів клубів і результати, що залежали від того, хто рухав роботу — муніципалітет чи волонтери [42]. *Урок:* знак вартий довіри лише тоді, коли може виключати; і він здобуває обізнаність задовго до того, як здобуває дохід.

Fundația ADEPT (Тирнава-Маре, Румунія). З 2004 року ADEPT працює з близько 1 500 фермерами в саксонських селах; фундація допомогла розробити румунську виплату за луки високої природної цінності, яка принесла близько 1 400 родинам близько €1,5 млн на рік і понад €2 млн на рік у цілу місцевість, із 24 505 гектарами лук під виплатою; її туристична робота — фестивалі, ярмарки, центр дикої природи — описана, але не виміряна [43]. Для порівняння, зіставне дослідження румунських місцевих груп дії LEADER не виявило суттєвої різниці в несільськогосподарському обороті чи зайнятості між комунами-учасницями та неучасницями [44]. *Урок:* тривкі результати дав потік виплат, прив’язаний до практики на землі, а не туристичний маркетинг чи самі лише грантові програми.

Гостинність донативо на Шляху святого Якова (Camino de Santiago). Притулки для паломників, що живуть на внесках, а не на ціні, тримаються на трьох речах: волонтерах-госпітальєро, будівлі, що належить парафії чи асоціації, і дарах колишніх паломників. Рекомендована пожертва — €5–12 за ліжко, вечерю та сніданок; «скупі паломники штовхають альберґе в низхідну спіраль», деякі приватні власники називають фіксовані €12 «донативо», а після пандемії притулок, якому колись вистачало дарів двадцяти паломників за ніч, потребує дванадцяти [47]. Мережі гостинності Servas (з 1949 року;

господарі ніколи не беруть плати, кандидатів співбесідує національний комітет), Warm Showers і BeWelcome працюють на членстві та волонтерському врядуванні [48]. *Урок:* оплата на основі внеску потребує носія витрат, іншого ніж дар гостя, і визначення різниці між внеском і ціною, яке розпізнають і господар, і прочанин.

Платформені кооперативи. Fairbnb, італійська кооперативна альтернатива Airbnb, залучив мільйон євро у 2021 році, тримав комісію 15 %, половина якої йшла на місцеві проєкти, був оцінений дослідженням 2025 року як такий, що ризикує стати «тим самим, лише більше», і пішов на добровільну ліквідацію у 2024 році, перш ніж його бренд купили у 2025-му [49]. Федеративна платформа доставки CoopCycle працювала там, де була місцева довіра, і зазнавала невдачі там, де чужоземна ліцензія спричиняла тертя [49]. Mapeo, інструмент картування з пріоритетом офлайн-роботи, створений з амазонськими громадами, показує, що картографічні дані у власності громади операційно можливі — з телефона на телефон [50]. У Новій Зеландії орган з трудових відносин ухвалив у 2018 році, що «волонтери», які працюють сорок годин на тиждень за стіл і дах та невелику плату, є працівниками, яким належить заробітна плата [51]. *Урок:* кооператив, який наслідує усталеного гравця, успадковує його економіку; дані у власності господарів здійсненні; а працю гостя треба оформлювати як гостинність, ніколи — як працю за стіл і дах.

Аппалачська стежка (США). Бентон Маккей запропонував її 1921 року не як пішохідний шлях, а як проєкт регіонального планування: стежку вздовж аппалачського хребта; притулки приблизно за день ходи один від одного; громадські табори поблизу на землі у спільній власності, де не продають ділянок і працюють без прибутку; а згодом — кооперативні фермерські та лісові табори, що їх постачають; шлях назад до землі, до праці й до здоров'я, збудований волонтерами, де кожну ділянку доглядає місцева група під федерацією [91]. Стежку збудували; громадські й фермерські табори — ні. Сьогодні її утримують близько тридцяти волонтерських клубів, кожен — свою ділянку, від 2,2 милі до понад 280, багато з них призначені ще у 1920-х і 1930-х роках; їх координує організація Appalachian Trail Conservancy, загальну відповідальність несе Служба національних парків, і з кожним із чотирнадцяти штатів є меморандум [92]. Щоб захистити стежку, Закон про систему національних стежок 1968 року та поправки 1978 року взялися викупити коридор. Примусовий викуп натрапив на жорсткий опір власників землі; закон 1978 року зробив його крайнім засобом після переговорів і сервітутів, а там, де власник відмовлявся, маршрут переходив до сусіда, який погоджувався [93]. Це також стежка рекреації в дикій природі на переважно державній землі — саме та рамка, яку ця книга відкидає для Карпат; її уроки — в її будові та історії, а не в її образі природи. *Урок:* пішохідна частина задуму знаходить волонтерів і гроші, а жива частина відпадає, якщо її не тримати від початку; федерація доглядачів ділянок може тримати стежку століття; а коридор, викуплений чи нав'язаний згори, обертає проти себе людей усередині лінії — коридор має виростати з їхньої згоди.

Урок	Звідки	Що роблять Стежки
Спершу бюджет на догляд	Via Transilvanica	Стежку утримують доглядачі та Куратор; не будується жодна інфраструктура, за яку ніхто не названий відповідальним
Назвати людину на кожну ділянку	KČT, KST, Ґорґани	Доглядач стежки
Спроєктувати доглядача до гранту	Via Dinarica	Куратор і доглядачі — перша робота пілота; фінансування йде людям раніше, ніж програмному забезпеченню

Урок	Звідки	Що роблять Стежки
Переконатися, що мандрівники існують, перш ніж будувати ліжка	Goodwin & Santilli	Господарі пропонують те, що вже мають; для прочан нічого не будується
Їжа та майстер-класи несуть сільський дохід	ODI	Чотири пропозиції, а не лише нічліг
Внесок потребує носія витрат	Донативо на Каміно	Внесок визначено в угоді (§8) як запропоноване формулювання; хто нестиме його витрати після гранту — відкрите (§12)
Знак має вміти виключати	Bergsteigerdörfer	Куратор утримує або відмовляється радити; угода дозволяє закрити обліковий запис за шкоду
Рахувати чесно	Via Transilvanica	Перехід 4 фіксує пройдену відстань, час і те, чого бракувало; успіх не вимірюється прочанами (§12)
Оформлювати працю гостя як гостинність	NZ ERA 2018	Обмін працею — форма оплати, яку господар може прийняти; угода має сказати, чим він не є (§10)
Не наслідувати усталеного гравця	Fairbnb	Без календаря, без рейтингів, без комісії, без застосунку для прочан
Дані у власності господарів здійсненні	Mapeo, CARE	Згода як стовпці, відкликання, експорт; жодної відкритої ліцензії на домівки (за чинною редакцією, A-2)
Зберегти живу частину задуму, а не лише стежку	Аппалачська стежка, 1921	Господарі й луки — це і є проєкт; стежка — те, що їх поєднує (§5, §9)
Федерація доглядачів ділянок може тримати стежку століття	Аппалачська стежка	Доглядач на кожну ділянку; співтворці першого коридору вирішують, як ним правити від Фази 2 (угода §4)
Коридор, нав'язаний згори, обертає проти себе людей усередині нього	Аппалачська стежка, 1978	Коридори як розмиті смуги, що виростають зі згоди, ніколи — ділянки (§9)

8. Підвалини

8.1 Убунту, чесно

UBEC — це Ubuntu Bioregional Economic Commons. *Убунту* зазвичай передають через формулу Mbiti «Я є, бо ми є; а оскільки ми є, то і я є» [68]: людина стає людиною через інших людей, і, у формулюванні Metz, «дія є правильною настільки, наскільки вона шанує гармонійні стосунки — такі, в яких люди ототожнюють себе одні з одними та виявляють солідарність одні до одних» [68]. Науковці Південної Африки поширили це поняття на більше-ніж-людський світ через шонське поняття *укама*, спорідненість, яке є мостом між «я є, бо ми є» і «люди і земля — одне й те саме» цього проєкту [68].

Проєкт користується цим словом обережно. Його власні прихильники сперечаються про його межі: одні називають його поширення після апартеїду елітним проєктом, метафізичні передумови якого — малі громади на родинних зв'язках — більше не діють; інші застерігають від узагальнення однієї «африканської екологічної етики» на багато мов [68]. Стежки називають убунту названим джерелом натхнення та перекладеним принципом, а не твердженням про тотожність, і ставлять його поруч із власною карпатською мовою сусідства: *толока* — спільна праця сусідів без плати, якою в Україні будували хати і звозили сіно, — найближча до того, що ця біла книга називає обміном працею; грошовий внесок гостя — не толока [69].

8.2 Біорегіон

Біорегіон «означає водночас географічну територію і територію свідомості — місце та уявлення, що склалися про те, як жити в цьому місці», а повторне заселення «означає вчитися жити-в-місці на території, яку порушила і поранила минула експлуатація» [77]. Критика також задокументована: біорегіональне письмо дозволяє природі диктувати суспільний лад і забуває, що лінії проводить культура [77]. Стежки уникають детермінізму, визначаючи свій регіон через місця, які люди справді поділяють, — шляхи, полонини, ринки та парафії, — а не лише через водозбір. Карпатська дуга — це один живий регіон через кордони семи чи більше країн, і проєкт є біорегіональним перш ніж національним: він починається з одного коридору в Україні і має перетнути кожен кордон на дузі, з партнерською ініціативою в кожній країні, що відкриває свій коридор під тими самими зобов'язаннями щодо даних, згоди, безпеки та грошей.

8.3 Спільне

Вісім принципів Ostrom для тривкого спільного — чітко визначені межі; правила, узгоджені з місцевими умовами; механізми колективного вибору; моніторинг, підзвітний користувачам; поступові санкції; дешеве розв'язання конфліктів; визнане право на самоорганізацію; вкладені одна в одну структури — витримали перевірку на дев'яносто одному випадку [78]. Прочитані крізь мережу гостинності, вони лягають на неї прямо. Межа — це хто вважається господарем, доглядачем, Куратором і що саме є спільним: маршрути, потік гостей, дані, добре ім'я мережі. Моніторинг — це Куратор, який читає кожне місце перед оприлюдненням, і доглядач, який проходить ділянку. Санкції поступові: утримати, не пропонувати, і лише за серйозну шкоду закрити обліковий запис — вислухавши людину. Розв'язання конфліктів іде так: спершу розмова, потім Куратор, потім керівник, потім посередник. Вкладеність — село, коридор, дуга. Колективний вибір — єдиний принцип, який пілот відкладає: у фазі 1 керівник проєкту вирішує перехід за переходом, вислухавши тих, кого це стосується, а угода обіцяє, що перед відкриттям фази 2 господарів, доглядачів і Кураторів першого коридору запитають, як проєкт має врядуватися далі (угода, §4). §12 називає це відкладення напругою.

8.4 Гостинність, дар, внесок, ціна

Derrida розрізняв безумовний закон гостинності — вітати, перш ніж запитати ім'я, — та умовні закони, що роблять її здійсненною, і називав гостинність «самою культурою, а не просто однією етикою серед інших» [79]. Mauss знайшов у дарі три обов'язки: дати, прийняти, відплатити; Hyde додає, що «дар мусить завше рухатися» і зв'язує так, як не може жоден товар [80]. Між даром і ціною лежить *внесок*: *донативо* на Каміно — плата, яка визнає витрати, не встановлюючи вартості гостинного прийому. Чотири форми оплати проєкту живуть на цьому середньому ґрунті, а його єдина відмова —

дар, названий у першій чернетці й вилучений, — чекає на свою письмову підставу (§12). Слово Illich для цього цілого — *конвівіальність*: «автономні та творчі взаємини між людьми і взаємини людей зі своїм довкіллям» [81].

9. Від місць до коридорів

Кожен господар говорить за своє місце. Поставлені поруч, ці місця і шляхи між ними починають говорити те, чого жодне не скаже саме: де жива культура, ландшафт і його природа ще тримаються разом і де вони під найбільшою загрозою. З часом стежка окреслить коридори — ділянки дуги, де культурна, природна та ландшафтна спадщина потребують догляду як одне ціле, і чутливі території, що потребують його всеосяжно. (На Плаї це слово має й друге, вужче значення: *коридор* там — набір збережених ділянок, складених у порядку ходьби, маршрут подорожі. Коридори цього розділу — ширші смуги догляду, які ці маршрути й місця на них можуть із часом виявити.)

Це не дика природа (§2). Догляд, якого вони потребують, укорінений у духовності, у зв'язку та в стосунках людей між собою і з землею, у розумінні, що люди і земля — одне й те саме. Коридор не проводить проєкт. Він виникає з місць, якими люди вирішили поділитися, і говорить лише за них. Там, де він дає громаді змогу сказати, чого варта її земля, перш ніж за неї це вирішать інші — вітрова електростанція, курорт чи ринок землі, розігнаний вступом до ЄС, — він зробив свою роботу.

Три умови додаються, і проєкт називає їх зараз, а не пізніше. Перша — згода: господар погодився бути показаним на мапі, а не стати доказом у справі про охорону; угода каже, що дані зберігаються, щоб поставити мережу на мапу, дати Куратору змогу пропонувати подорожі та дати прочанам змогу знаходити господарів, «і ні для чого іншого», а зміна призначення знову потребує згоди кожної людини (угода, §5, §13). Жоден коридор не спирається на місце господаря без окремої згоди на це, від якої господар може відмовитися, залишаючись на мапі, і яку може будь-коли відкликати; коридор показують широкою смугою, ніколи — ділянками, і ніколи — з підрахунком згод проти людей, що живуть усередині (вирішено 9 жовтня 2026 року; згоду викладено в угоді v0.6). Друга — люди всередині лінії: коридор, окреслений за мережею, перетинає землю, де живуть люди, які ніколи до неї не приєднувалися, і «говорить лише за них» має залишатися правдою, коли коридор кладуть перед міністерством, Карпатською вісімкою чи донором. Третя — охорона як тиск: саме надання статусу може підняти ціни на землю і заборонити косіння та випас, що створили ці луки; охоронюваний ландшафт, у якому можуть дозволити собі жити лише заможні, зазнав невдачі.

Словник уже існує — культурні ландшафти Конвенції, категорія V МСОП (IUCN), тяглий ландшафт ЮНЕСКО, власні слова декларації К8 [18][25][60][61]. Те, що додає коридор, окреслений знизу, — єдине, чого не може дати статус, наданий згори: згода, місце за місцем, людей, чия це земля.

10. Робота у воєнний час і в межах закону

Пілот починається в Україні під час війни, і проєкт спроєктований навколо цього факту, а не попри нього. Цей розділ переказує, що кажуть закон і офіційні роз'яснення; це не юридична консультація, і угода вже називає два юридичні прочитання, які мають передувати першому справжньому обліковому запису і першому прочанинові.

10.1 В'їзд, рекомендації та страхування

Повітряний простір України закритий; іноземці в'їжджають суходолом. Громадяни ЄС, Великої Британії, США, Канади та інших безвізових держав в'їжджають за паспортом, із підтвердженням коштів за постановою Кабінету Міністрів № 884 [52]. Кожен західний уряд не рекомендує подорожувати: Велика Британія — проти всіх, крім необхідних, поїздок до п'яти західних областей, серед них Івано-Франківської, і проти будь-яких поїздок в інші регіони; США — рівень 4, «не подорожуйте»; Німеччина й Канада — із попередженнями для всієї країни; усі зазначають, що консульська допомога дуже обмежена, а страхування подорожей може втратити силу [53]. Українські джерела описують медичне страхування від страховика, зареєстрованого в Україні, як обов'язкове для тих, хто в'їжджає без візи, і українські страховики продають покриття воєнних ризиків із лімітами близько 100 000 грн, тоді як більшість західних страховиків виключають Україну; первинної правової підстави для вимоги страхування при безвізовому в'їзді не знайдено, і вона значиться як невирішена [52]. Відповідь проєкту — та, яку вже дає угода: прочанин читає рекомендації свого уряду, розуміє, що в Україні діє воєнний стан, має при собі те страхування, яке може дістати, і, якщо приходить через Куратора, отримує від нього чесний брифінг перед приїздом. Аргументи за те, щоб узагалі запрошувати прочан — солідарність, дохід там, де він потрібен, свідчення, — і аргументи проти — ризик для гостей, тягар для господарів, оселя, що стала видимою, — обидва справжні. Що кажуть прочанинові з-за кордону, вирішено (9 жовтня 2026 року); чи взагалі запрошувати прочан із-за кордону — питання, яке проєкт тримає на увазі (§12).

10.2 Комендантська година, тривоги та прикордонна смуга

Комендантська година в Івано-Франківській області триває з опівночі до п'ятої ранку за рішенням обласної Ради оборони [54]. Під час повітряної тривоги всі дотримуються офіційного попередження й ідуть до найближчого укриття, яке знає господар; подорож зупиняється. Жорстке обмеження для першого коридору — державний кордон. За постановою Кабінету Міністрів № 1147 зі змінами від грудня 2023 року прикордонна смуга — це п'ять кілометрів від лінії кордону; для в'їзду, перебування чи роботи в ній потрібен письмовий дозвіл прикордонного загону, який ухвалюють протягом десяти днів і тепер видають як QR-код; населені пункти та місця масового відпочинку виключено, тож для входу в село дозвіл не потрібен, а для виходу з нього в ліс чи на полонину — потрібен [55]. Верховинський район — контрольований прикордонний район, і наказ № 1663-АГ 31-го (Чернівецького) прикордонного загону від травня 2024 року стосується Зеленської та Білоберізької громад: вхід у п'ятикілометрову смугу з туристичною чи рекреаційною метою без дозволу заборонений, з обмеженнями на зупинку транспорту та скупчення на узбіччі; маршрути на Піп Іван Чорногірський, Пожижевську та озеро Бребенескул закриті або обмежені, а пізніші роз'яснення додають Туркул і полонини; дозволи дійсні рік, і до липня 2024 року їх було видано понад десять тисяч [55]. Національний природний парк «Верховинський» підтверджує, що керівники груп надсилають до загону маршрут, дати й паспортні дані учасників заздалегідь [55]. Як іноземець

отримує такий дозвіл на практиці і околиці яких сіл потрапляють у смугу — на це жодне джерело не відповіло; обидва питання має з'ясувати Куратор, перш ніж пропонувати будь-який етап поблизу хребта, а етап, що потребує дозволу, каже про це.

10.3 Гостинність із власної хати

Окремого закону про сільський туризм немає; проєкти законів 2021 року і пізніші так і не були ухвалені, і сектор «залишається майже нерегульованим» [57]. Що існує — це Порядок № 297 Кабінету Міністрів 2006 року: власники індивідуальних засобів розміщення до тридцяти місць можуть надавати тимчасовий нічліг без реєстрації підприємницької діяльності, за умови що вони щороку декларують дохід, ведуть книгу обліку гостей, подають статистику місцевій владі та дотримуються санітарних норм; фізична особа сплачує ПДФО за ставкою 18 % плюс військовий збір, нині 5 % [57]. Господар, який воліє зареєструватися як ФОП, може надавати готельні послуги на спрощеній системі оподаткування [57]. Чи мусить домогосподарство, яке годує платних гостей, реєструвати потужність з виробництва харчових продуктів за Законом № 771/97, і як туристичний збір застосовується до незареєстрованого господаря — сірі зони [57]. Від місцевого провідника ліцензії не вимагають; ліцензування стосується лише туроператорів [58]. Проєкт не може перевірити нічого з цього за господаря і не повинен удавати, що може: угода каже, що кожен господар відповідає за своє (§8), а огляд проєкту просить, щоб Куратор казав це прямо під час першого візиту.

10.4 Гроші, і чим проєкт не є

Плата за нічліг чи їжу — це дохід від послуг, як би її не називали; справжній дар від особи, що не є родичем, оподатковується в отримувача, за вищою ставкою, коли дарувальник — нерезидент, тож називати внесок даром жодної переваги не дає [58]. Бартер законний, а дохід у натуральній формі оподатковується за справедливою вартістю; спільнотні валюти не мають правового статусу, бо гривня — єдиний законний платіжний засіб, і саме тому «ubec-pay або спільнотна валюта» називає форму оплати, яку господар може прийняти, а не платіжну систему, якою керує проєкт [58]. Обмін праці іноземця на харч і дах порушує питання дозволів на роботу та законодавства про волонтерство, які залишаються невирішеними, а новозеландський прецедент у §7 показує, що стається, коли працю в гостях трактують як найману [51][58]. За Законом України «Про туризм» *туристичний продукт* — це попередньо розроблений комплекс двох чи більше послуг, що продається за встановленою ціною, і ліцензують лише туроператорів [58]. Проєкт має намір не продавати жодного продукту, не приймати бронювань і грошей; чи підпадає під це визначення оплачуваний Куратор, який радить подорожі й каже господарям, хто прийде, — перше питання для українського юридичного прочитання. Директива ЄС про пакетні подорожі застосовується до торговців і виключає «пакетні подорожі та пов'язані туристичні послуги, що пропонуються, і пов'язані туристичні послуги, сприяння яким надається, час від часу, на неприбутковій основі і лише обмеженій групі мандрівників» [58]; чи є постійна мережа «час від часу» — питання для того самого прочитання. Угода каже, що проєкт, його Куратори та доглядачі «не збирають плати за нічліг, їжу, супровід чи майстер-класи й не беруть із неї частки», а оплата йде напряму від прочанина до господаря (вирішено 9 жовтня 2026 року). Цю конструкцію має підтвердити хтось, хто знає українське туристичне законодавство, до першого прочанина.

10.5 Дані, у Німеччині та в Україні

Дані лежать на власному сервері UBEC у Німеччині, у власній базі даних Плаю, окремій від усіх інших проєктів. Оприлюднене розташування оселі — це персональні дані і за GDPR, який прямо називає дані про місцезнаходження, і за українським Законом № 2297-VI [56]. Український закон 2010 року залишається чинним із мізерними штрафами; узгоджений з GDPR закон на заміну пройшов перше читання в листопаді 2024 року і в середині 2026 року все ще чекав на друге, а його ухвалення —

один з орієнтирів вступного кластера 1, відкритого в червні 2026 року [56]. Рішення ЄС про адекватність щодо України немає; передача даних до Німеччини дозволена за українським законом, бо Німеччина — сторона Конвенції № 108 [56]. Передбачена підстава — згода: угода, прийнята з кожним записом, і окрема галочка для кожного контакту й фотографії, кожну з яких можна відкликати. Чи цього достатньо і за яким правом — питання для прочитання щодо захисту даних. Чи підпадає контролер даних, розташований в Україні, який збирає дані прочан з ЄС, під екстратериторіальну дію GDPR і чи потребує він представника в ЄС — це питання для прочитання щодо захисту даних, якого угода вже вимагає перед першим справжнім обліковим записом.

11. Де стоїть проєкт

Чесність щодо етапу — частина задуму. На 13 жовтня 2026 року:

Що є. Пропозиція англійською та українською; посібник користувача для авторів записів і Кураторів обома мовами, з екранами такими, якими вони є; угода співтворців для кожної ролі — господар, доглядач стежки, Куратор, прочанин, співавтор, партнерська ініціатива, донор, адміністратор — обома мовами, як чернетка з трьома відкритими пунктами (A-2, A-5, A-6) і одним, переданим основному об'єднанню (A-4); документ про підстави; і, на Плаї, базова мапа Карпат, форма внесення зі згодою, записаною окремо для кожного поля, поля господаря, місця господарів, показані публіці, фотографія, галочка угоди на кожному записі та оприлюднене місце, відкрите у браузері, що несе кожне поле господаря, з посиланням, яке відкриває точку у власному мапному застосунку читача; планувальник стежок, публічний на Плаї, з ділянками й коридорами, які зберігаються, мають версії і оприлюднюються Куратором (11–13 жовтня; Перехід 5, пройдений перед Переходом 3); сайт проєкту tcp.ubec.network, де є ця книга, пропозиція, огляд та угода англійською та українською, а перші три — ще й німецькою та польською; і публічний запис. Переходи 0, 1 і 2 — рішення, Плай у браузері, поля господаря — закриті датованим записом.

Чого немає. Жодного господаря чи доглядача стежки на ім'я — першим Куратором поки є керівник проєкту, доки не створено основне об'єднання; жодного справжнього облікового запису. Резервних копій з копією поза хостом — а це власна умова сервісу для першого справжнього облікового запису. Поштового сервісу, тож забутий пароль скидає адміністратор, підтвердивши запит із власником облікового запису. Юридичної особи: документи називають трьох ініціаторів — UBEC, «Живу хату» і «Теплу Гору», — але жодне з двох дерев не називає правової форми проєкту, а контролером даних кожного господаря сьогодні особисто є керівник проєкту. Ухваленого бюджету: пілот на вісімнадцять місяців приблизно за €25 700 рекомендовано в пропозиції, але не ухвалено. Програмне забезпечення випереджає угоди між людьми — правильний порядок для мапи, бо модель згоди треба було довести, перш ніж просити когось їй довіритися, — і Перехід 3, перші господарі, є першим переходом, чия робота — обіцянка, дана людині. Прочитання українських текстів людьми з коридору.

Ризики, які проєкт назвав сам для себе, у власному огляді: сервіс залежить від однієї людини, у воєнний час, а заступника ще не названо; немає юридичної особи; власні зобов'язання господарів за податковим законодавством і воєнним станом; знання воєнного часу, яке тримають Куратори з письмовим обов'язком конфіденційності лише в проєкті угоди; дім, показаний у своїй точній точці, — це адреса, і показати його має бути свідомим вибором господаря; оплачувані ролі ще без умов; люди на фотографіях і в історіях.

Переходи попереду. Перехід 3: три-п'ять господарів у коридорі, внесених із Куратором поруч, один названий Куратор — після резервних копій. Перехід 4: коридор, пройдений від краю до краю, із записом пройденої відстані й часу на кожний етап, того, чого бракувало, і того, що прочанинові було потрібно й чого він не мав. Перехід 5, публічний планувальник, пройдено перед Переходом 3

(рішення від 11 жовтня 2026 року): сторінка, сервіс і збереження працюють на Плаї, а етапи, пройдені на Переході 4, стають його перевірними випадками. Перехід відкривається на виконаній роботі, а не на даті.

12. Що відкрите

Проєкт тримає свої напруги на видноті, а не розв'язує їх на папері. Документ про підстави викладає дванадцять; біла книга називає ті, про які має знати читач поза проєктом.

- **Мапа проти «без вистави».** Позначка, що каже «майстер-клас», запрошує свого господаря стати тим, що каже позначка. Чесна пропозиція, без календаря, без рейтингів і Куратор, який читає кожне місце перед оприлюдненням, — це запобіжники; хто каже про це, коли господар починає грати виставу, і що тоді стається — відкрите.
- **Оплачено, але не транзакція.** Що відрізняє внесок від ціни — словами, які впізнали б і господар, і прочанин; і чому дару не було серед чотирьох форм.
- **Влада Куратора.** Пам'ять стежки також вирішує, хто на ній з'являється. Перший Куратор — керівник проєкту, названий до перших господарів; далі вирішує основне об'єднання, а наступних Кураторів називають усі співтворці (9 жовтня 2026 року). Що може зробити господар, якого обійшли, — відкрите; шлях розв'язання спорів в угоді — перша відповідь.
- **Органічне зростання, що почалося ззовні.** Мапу збудували до того, як з'явилися господарі, — ініціатива, яку веде одна людина. Що переходить до коридору і коли — наприклад, коли власні Куратори коридору обирають наступний коридор — це питання врядування, на яке має відповісти фаза 2.
- **Досить.** Скількох прочан може прийняти господар чи село, перш ніж зустріч стане потоком; місткість на кожну пропозицію — перший запобіжник; фіксованої межі немає, а Куратор тримає огляд місткості кожного господаря, кожної ділянки й усієї стежки (9 жовтня 2026 року).
- **Мапа як путівник для покупця.** На зростаючому ринку мапа старих хат у їхніх точних точках — це також список для розвідки. Господар може поставити свою точку в сусідньому місці зустрічі й розповісти прочанам решту особисто; це власний вибір господаря, і ніхто йому цього не пропонує (9 жовтня 2026 року).
- **Новоприбулі.** Чи приймають прочан ті, хто приїхав жити й учитися, на тих самих умовах, що й ті, хто тут народився, і як проєкт про них говорить.
- **Згода для коридорів, люди всередині лінії, охорона як тиск** (§9).
- **Прочани у воєнний час.** Що кажуть прочанинові з-за кордону, вирішено (OI-P12, 9 жовтня 2026 року): він сам готується вдома, а Куратор повторює це тим, хто приходить через нього. Чи взагалі запрошувати прочан із-за кордону, доки триває війна, проєкт тримає на увазі.
- **Паломництво.** Слово збережено в імені «прочанин плаю» (§4.3); чи каже проєкт прямо, що не запозичує нічиєї віри, досі відкрито.

Що ще не відомо і чого мають навчити перші відвідини: вік землевласників коридору і що станеться з їхньою землею; скільки новоприбулих оселилося в його селах і чому; що вступ до ЄС уже робить із цінами на землю в Українських Карпатах; чи візьметься Карпатська вісімка за спадщину та природу і чи почує громади безпосередньо; і як власні люди коридору називають той догляд, який описує ця біла книга, — своїми словами, з яких має постати український текст.

Як виглядав би успіх (пропозиція). Господарі, які після трьох сезонів далі приймають прочан на власних умовах і кажуть, що це було варте того; молода людина, яка вчиться ремесла чи роботи на луці, бо стежка звела їх разом; Куратори й доглядачі, які є людьми коридору й самі обирають

наступний коридор; гроші прочан, що залишаються в селах; громада, яка використовує те, що показує стежка, щоб говорити за власну землю в рішенні про неї. **Як виглядала б невдача:** костюми та інсценовані трапези; ціни вздовж стежки, що зростають швидше, ніж довкола, і хати на мапі, куплені людьми, які знайшли їх там; одне село переповнене, тоді як інші не бачать нікого; Куратор, що став агентом; і проєкт, який описують кількістю перевезених прочан. Ні те, ні інше не рахують у прочанах. За обома стоїть одне регенеративне випробування (§5): чи це місце живіше й здатніше тривати далі, ніж було до стежки?

13. Що просять

У донорів. Підтримка пілота йде насамперед людям на місці й лише потім — програмному забезпеченню, бо мапа вже існує: знайти господарів, відвідати їх і сидіти поруч, поки вони вносять записи; оплачуваний перший Куратор за письмовою домовленістю; пройти коридор і оцінити кожний етап; два юридичні прочитання; переклад; хостинг, резервні копії та запобіжники, що тримають дані господарів приватними. Фінансування не дає голосу щодо того, що оприлюднюється чи які подорожі пропонуються, і не дає доступу до даних господарів чи прочан; що надійшло і на що витрачено, звітується на кожному переході (проєкт угоди, частина донора). Бюджет рекомендовано, але не ухвалено (пропозиція, «Фінансування»), і проєкт не обіцятиме господареві доходу, якого не може показати. Просять фінансування регенерації, а не пом'якшення: не зменшення шкоди від туризму, яке курорти можуть оплатити самі, а здатність кількох місць тривати далі, виміряну за ознаками з §12.

У партнерських ініціатив уздовж дуги. Коридор у будь-якій іншій країні дуги — у якій саме, теж відкрите (OI-P11) — відкритий за угодою співтворців або її версією, що зберігає її зобов'язання щодо даних, згоди, безпеки та грошей, із власними господарями, доглядачами та Кураторами своєю мовою, з даними, утримуваними за тією самою згодою і переданими в повному обсязі, якщо коридор піде своїм шляхом.

У гірських громад та їхніх рад. Не схвалення, а увага: прочитати цю білу книгу; переказати людям, які вже приймають гостей, навчають ремесла, пасуть чи косять, що такий проєкт є і як із ним зв'язатися, — щоб вони самі вирішили, чи озиватися; і запитання, на які село хотіло б мати відповідь, перш ніж хтось із його людей з'явиться на мапі.

У Карпатської вісімки та Карпатської конвенції. Декларація K8 зобов'язує її підписантів щодо культурних ландшафтів, традиційного способу життя гірських громад і спільних культурних шляхів; Конвенція розглядає природу й культуру разом від 2003 року, а Україна головуватиме в ній після COP8. Стежки — одна конкретна форма, якої може набути це зобов'язання, збудована від громад назовні, і вона просить, щоб її почули саме так: як місця названих господарів і шляхи між ними, показані з їхньої згоди і без права говорити за когось іншого — ніколи не як те, чого хоче громада, бо це може сказати лише громада.

У будь-кого. Документи проєкту, його код і запис кожного рішення з датою відкриті в публічному репозиторії `ubeccommon/trans_carpathian_pathways`; його угода навмисно написана простими словами; і запропонувати може кожен. Контакт: Мішель Ґаран — stewardship@ubec.network.

Додаток A — Документи проєкту, переглянуті

Усе в публічному репозиторії `ubeccommon/trans_carpathian_pathways`, документи — за ліцензією CC BY-SA 4.0, код — за AGPL-3.0-or-later. Прочитано для цієї білої книги 9 жовтня 2026 року у версіях, наведених нижче; поточні версії — у репозиторії.

Документ	Версія	Що містить
Стартовий промпт	v0.21	Порядок завантаження, кожне рішення з датою, ролі, перший коридор, переходи, відкриті пункти; джерело істини
Пропозиція (EN, UK, PDF)	v0.2	Зовнішній підсумок: потреба, відповідь, кому служить, коридор, Плай, принципи, безпека, дорожня карта, фінансування, як узяти участь
Специфікація полів господаря	v0.5	Що несе точка господаря на Плаї і як це доводиться
Огляд стану Mapservice	v0.1	Стек, на якому працюють Стежки; читати перед будь-якою зміною
Огляд проєкту	v0.1	Вісім розходжень, одинадцять ризиків, що має врегулювати угода
Посібник користувача (EN, UK, PDF)	v0.3	Внесення місця й кураторство, екран за екраном, із тим, чого стек ще не вміє
Угода співтворців (EN, UK, PDF)	v0.2	Що обіцяє кожна роль; сім пунктів відкриті до підписання
Підстави	v0.1	Чому: коріння, дві сили, коридори, підстава кожного принципу, дванадцять напруг

Де документи розходилися з рішеннями. 9 жовтня пропозиція мала версію v0.2, і власний огляд проєкту від 8 жовтня зафіксував у ній чотири розходження (D-2, D-3, D-4, D-6); пропозиція v0.3 виправила всі чотири того ж дня, а §5 документа про підстави тепер — єдиний перелік принципів.

Що ця біла книга додає з того, чого ще не містив жодний документ. Тиски в цифрах із джерелами (§1); свідчення про луки для «не дика природа» (§2); аргументи за регенерацію проти сталого розвитку, з діаграмами (§5); порівнянні проєкти та їхні уроки (§7); правова рамка в одному місці (§10); і прохання (§13). Де вона спиралася на власні слова проєкту, вона зберегла їхній зміст; де пропонує — каже про це.

Джерела

Прочитано 9 жовтня 2026 року. Цифри з вторинних зведень позначено; позиції з позначкою *unverified* не вдалося підтвердити за первинним джерелом.

Регіон

1. Ekonomichna Pravda, “Буковель дорожчий за Київ”, June 2026 (the cited page could not be re-fetched at checking; the text is confirmed word for word in a copy dated 23 June 2026) — https://epravda.com.ua/biznes/karpati-ta-bukovel-yak-zrostaye-investiciyna-neruhomist-i-pributki-kurortu-822922/

2. Zaxid.net, “Будинок в Карпатах: скільки коштує і від чого залежить ціна”, 1 October 2025 (OLX listings) — https://zaxid.net/budinok_v_karpatah_skilki_koshtuye_i_vid_chogo_zalezhit_tsina_n1620372
3. Novyny.LIVE, “Ціни на будинки в горах”, August 2025 — https://novyny.live/neruhomist/tsini-na-budinki-v-gorakh-skilki-groshei-treba-viddati-za-pokupku-272912.html
4. Ukrainian News, “Thanks to Bukovel, the Polianytsia community has recorded its highest ever tourist tax revenues”, 12 June 2025 — https://ukranews.com/en/amp/news/1087356-thanks-to-bukovel-the-polianytsia-community-has-recorded-its-highest-ever-tourist-tax-revenues
5. Ivano-Frankivsk oblast tourism department, “Туризм Івано-Франківської області 2025” (visitor figures from 2020 are departmental estimates) — https://speakerdeck.com/iftourism/turizm-ivano-frankivskoyi-oblasti2025
6. Ekonomichna Pravda, “Відвідуваність українських курортів зросла до 40% на зимові свята”, January 2025 — https://epravda.com.ua/biznes/vidviduvanist-ukrajinskih-kurortiv-zrosla-do-40-na-zimovi-svyata-802063/
7. Suspilne Ivano-Frankivsk, “У яких громадах Івано-Франківщини живуть найбільше переселенців”, 21 May 2025 — https://suspilne.media/ivano-frankivsk/977307-u-akih-gromadah-ivano-frankivsini-zivut-najbilse-pereselenciv/; Suspilne, 9 February 2021 — https://suspilne.media/102967-pereselenci-na-prikarpatti-so-kaze-statistika-cerez-7-rokiv-vid-pocatku-vijni/; raion populations: Wikipedia “Kosiv Raion”, “Verkhovyna Raion” (compiled from Ukrstat estimates; secondary); Lozynskyy & Zubyk, “Transformation of the Rural Settlement Network in the Carpathian Region of Ukraine (1989–2020)”, *European Countryside* 14(2), 2022 — https://doi.org/10.2478/euco-2022-0014; Teslyuk & Rushchyshyn, *Herald of Khmelnytskyi National University* 296(4), 2021 — https://heraldes.khmnu.edu.ua/index.php/heraldes/en/article/view/1607
8. Suspilne Ivano-Frankivsk, “Як на Франківщині зменшується чисельність корів”, 13 March 2025 — https://suspilne.media/ivano-frankivsk/968067-ak-na-frankivsini-zmensuetsa-ciselnist-koriv-statistika-z-1991-roku/; ZN.ua, “Біле золото Карпат”, 20 September 2019 — https://zn.ua/ukr/business/bile-zoloto-karpat-324136_.html; UkrAgroConsult, “На Прикарпатті відроджуватимуть вівчарство”, 5 September 2022 — https://ukragroconsult.com/news/na-prykarpatti-vidrodzhuvatymut-vivcharstvo/
9. Texty.org.ua, “Карпати 3D”, c. 2017 — https://texty.org.ua/d/carpathians-3d
10. LB.ua, “Джипер високогір’я”, 3 August 2026 — https://lb.ua/society/2026/08/03/756098_dzhiper_visokogiryi_tse_ruskiy.html
11. Vikna.tv, “Держава повернула 20 ділянок лісу біля Буковелю”, 6 March 2026 — https://vikna.tv/dlia-tebe/novyny-ukrayiny/derzhava-povernula-20-dilyanok-lisu-bilya-bukovelyu-rishennya-sudu/amp/
12. Bruno Manser Fonds, “The Svydovets Case”, June 2019 — https://en.forumcivique.org/kampagnen/forest/report_the_svydovets_case.pdf
13. CEE Bankwatch Network, “Ukraine’s Mount Runa at risk”, issue paper, 27 August 2026 (updated 25 September 2026) — https://bankwatch.org/wp-content/uploads/2026/08/2026_08_Issue-Paper_Ukraine-s-Mount-Runa-at-risk.pdf
14. Government of Ukraine, report to the Bern Convention Standing Committee, file 2018/5 Skhidnyi Svydovets, 20 January 2025 — https://rm.coe.int/files-2018-5-ukraine-skhidnyi-svydovets-2025-gov-2757-1931-8795-1/1680b4b790
15. Ukrainian Nature Conservation Group, “High-level meeting called to address Carpathian wind farm crisis”, 2025 — https://uncg.org.ua/en/high-level-meeting-called-address-carpathian-wind-farm-crisis/; Derevo.ua, “How the War is Changing the Ecological Balance of the Carpathians” — https://derevo.ua/en/publication/vijna-zagostrila-ekologichni-konflikti-v-3801

16. Ukrainian News, "'The Forest Republic': How Logging Interests in Zakarpattia Are Blocking Investment Projects", 2025 — https://ukranews.com/en/amp/news/1076072-the-forest-republic-how-logging-interests-in-zakarpattia-are-blocking-investment-projects-to-keep

17. European Pravda, "Zelenskyy announces new format for cooperation with neighbours: the Carpathian Eight", 18 September 2026 — https://www.eurointegration.com.ua/eng/news/2026/09/18/7245769/

18. President of Ukraine, "Declaration of the Summit of the Carpathian Integration Initiative", 18 September 2026 — https://www.president.gov.ua/en/news/deklaraciya-samitu-karpatskoyi-integracijnoyi-iniciativi-106445

19. Kyiv Post, 18 September 2026 — https://www.kyivpost.com/post/84863 and https://www.kyivpost.com/post/84833; Reuters via Internazionale, 19 September 2026 — https://www.internazionale.it/ultime-notizie-reuters/2026/09/19/zelenskiy-launches-carpathian-eight-initiative-on-trade-security; Ministry of Economy of Ukraine, panel "Єдиний карпатський простір", 22 September 2026 — https://me.gov.ua/News/Print/ec56852e-bdba-46a7-9ab1-30aaaed8fb29?lang=uk-UA

20. AFP via Courthouse News, 22 September 2026 (Hungary's representation and its Foreign Ministry's statement); signatories from the declaration text [18]

21. President of Ukraine, meeting with heads of mountain hromadas, 13 August 2026 — https://www.president.gov.ua/en/news/prezident-obgovoriv-iz-predstavnikami-girskih-gromad-vikliki-105813

22. OSW, "Ukraine: two years of free trading in arable land", 17 July 2023 — https://www.osw.waw.pl/en/publikacje/analyses/2023-07-17/ukraine-two-years-free-trading-arable-land; Mondaq on Romania's Law 17/2014, 28 January 2014 — https://www.mondaq.com/Article/452626

23. Demagog.pl, "Problem własności gruntów rolnych: wnioski dla Ukrainy z polskiej drogi do UE", 8 April 2026 — https://demagog.org.pl/analizy_i_raporty/problem-wlasnosci-gruntow-rolnych-wnioski-dla-ukrainy-z-polskiej-drogi-do-ue/

24. Bórawski et al., *Land Use Policy* 82 (2019) 486–496 — https://doi.org/10.1016/j.landusepol.2018.11.027; Warsaw Business Journal, "Real estate and land prices are breaking new records in Zakopane", 29 December 2021 — https://wbj.pl/real-estate-and-land-prices-are-breaking-new-records-in-zakopane/post/133108; Butnaru, "The impact of liberalization on the Romanian land market", ASE Bucharest, c. 2014 — https://www.cafee.ase.ro/wp-content/uploads/2022/10/THE-IMPACT-OF-LIBERALIZATION-ON-THE-ROMANIAN-LAND-MARKET-SALES.pdf; Osservatorio Balcani e Caucaso, "The Saxons' fragile treasure", 22 September 2009 — https://www.balcanicaucaso.org/en/cp_article/the-saxons-fragile-treasure/

25. Carpathian Convention (FAO/Mountain Partnership summary) — https://fao.org/fileadmin/templates/mountain_partnership/doc/4th_global_meeting_presentations/Carpathian_Convention.pdf; Government of Ukraine on COP8 and the presidency, 10 November 2025 — https://www.kmu.gov.ua/en/news/ukraina-hotuietsia-do-prezydentstva-v-karpatskii-konventsii

26. InforMEA, Protocol on Sustainable Tourism — https://www.informea.org/en/treaties/protocol-sustainable-tourism/decisions

27. InforMEA, decision COP4/7 on cultural heritage and traditional knowledge, 2014 — https://www.informea.org/en/decision/cop47-cultural-heritage-and-traditional-knowledge

28. ReHERIT, heritage profile of Kosiv, 2020 — https://reherit.org.ua/wp-content/uploads/2020/08/Kosiv_profil-spadshhyny_REHERIT.pdf

29. UNESCO, "Tradition of Kosiv painted ceramics", Representative List 2019 — https://ich.unesco.org/en/RL/tradition-of-kosiv-painted-ceramics-01456

30. Discover Ivano-Frankivsk, the Kischuk family lizhnyk museum-workshop, Yavoriv — https://discover.if.ua/en/locations/muzej-majsterna-liznikarstva-rodini-kisukiv-u-avorovi

31. Suspilne, “Гуцульська коров’яча бриндза отримала географічне зазначення”, 14 September 2020 — https://suspilne.media/62845-guculska-korovaca-brindza-otrimala-geograficne-zaznacenna/; Slow Food Foundation, “In defense of authentic Hutsul bryndza”, 24 April 2018 — https://www.fondazioneslowfood.com/en/in-defense-of-authentic-hutsul-bryndza/

32. Ekonomichna Pravda, “3 Каховки до Косова”, 2025 — https://epravda.com.ua/biznes/z-kahovki-do-kosova-809595/

Ландшафт

33. Janišová et al., “Agricultural legacy shapes plant diversity patterns in mountain grasslands of Maramureș and Bukovina”, *People and Nature* 6(6), 2024 — https://doaj.org/article/9caebdd433aa40af98967f90d8c0b455

34. Kricsfalusy, “Mountain grasslands of high conservation value in the Eastern Carpathians”, *Thaiszia* 23(1), 2013 — https://www.upjs.sk/public/media/9724/067-112-kricsfalusy-upr.pdf

35. Baur et al., “Effects of abandonment of subalpine hay meadows on plant and invertebrate diversity in Transylvania, Romania”, *Biological Conservation* 132(2), 2006 — https://edoc.unibas.ch/12896

36. Fischer, Hartel & Kuemmerle, “Conservation policy in traditional farming landscapes”, *Conservation Letters* 5, 2012.

Порівнянні ініціативи

37. Via Transilvanica — Wikipedia (secondary) — https://en.wikipedia.org/wiki/Via_Transilvanica; Romania Insider, 10 September 2025 — https://www.romania-insider.com/via-transilvanica-norway-grants-pislaru-sept-2025

38. Ziarul Financiar, 1 August 2025 — https://www.zf.ro/via-transilvanica/via-transilvanica-mult-traseu-turistic-ajuta-dezvoltarea-zonelor-22867654; ZF, 22 September 2025 — https://www.zf.ro/via-transilvanica/via-transilvanica-drumul-uneste-comunitati-businessuri-cristina-toma-22908279; Agerpres, 14 May 2026 — https://agerpres.ro/2026/05/14/reportaj-mures-primul-modul-de-cazare-pentru-drumetii-de-pe-via-transilvanica—inaugurat-la-saparto–1556156; Economedia on The Guardian — https://economedia.ro/?p=231748; Tălpău et al., Mendel University Press, c. 2025 — https://doi.mendelu.cz/pdfs/doi/9900/08/3500.pdf

39. UNDP Bosnia and Herzegovina, Via Dinarica project pages — https://global-prod.acquia.undp.org/node/91131 and https://www.undp.org/node/442241; AICS Tirana project sheet, January 2026 — https://tirana.aics.gov.it/wp-content/uploads/2026/01/Sustainable-Tourism-for-Green-Growth-Along-the-Via-Dinarica-Trails-in-Bosnia-and-Herzegovina.pdf

40. ČT24, 17 January 2019 — https://ct24.ceskatelevize.cz/domaci/2708774-pred-130-lety-byla-v-cesku-namalovana-prvni-turisticka-znacka-sit-znacenych-tras-meri; TASR, 17 May 2026 — https://www.teraz.sk/slovensko/klub-turistov-priblizne-350-znackaro/963427-clanok.html; Noviny.sk, 13 June 2025 — https://www.noviny.sk/slovensko/1072270-hory-su-plne-turistov-znacenie-tras-je-v-rukach-dobrovolnikov-zakon-ktory-mal-upratat-chaos-sa-odklada

41. Ukrinform, 14 May 2021 — https://www.ukrinform.ua/rubric-tourism/3244990-na-zakarpatti-turistiv-zaprosuut-projti-najdovsij-marsrut-karpatami.html; Suspilne, 2 June 2021 — https://suspilne.media/135818-u-gorganah-vidnovluut-markuvanna-na-shidno-karpatskomu-turisticnomu-slahu/

42. Bergsteigerdörfer, criteria 2017 (EN) — https://www.bergsteigerdoerfer.org/files/criteria_for_mountaineering_villages_2017.pdf; criteria 2025 (DE) — https://alpenverein.it/wp-content/uploads/2026/01/Kriterien-der-Bergsteigerdoerfer-Fassung-2025.pdf; Czaja, mid-term evaluation, 2012 — https://trustsoft.uni-oldenburg.de/f/5/inst/biologie/ag/geoumwelt/zenario/Abschlussarbeiten/Masterarbeit_Iris_Czaja.pdf

43. Fundația ADEPT, Darwin Initiative final report EIDPO037, 20 May 2013 — https://www.darwininitiative.org.uk/documents/EIDPO037/23507/EIDPO037%20FR%20-%20Edited.pdf; Sigrid Rausing Trust, 2021 — https://www.sigrid-rausing-trust.org/story/biodiversity-and-environmentally-friendly-farming-in-romania/

44. Pocol et al., *AgroLife Scientific Journal* 6(1), 2017 — https://expertise.unimi.it/resource/item/563408

45. Goodwin & Santilli, "Community-Based Tourism: a success?", ICRT Occasional Paper 11, 2009 — https://www.andamandiscoveries.com/press/press-harold-goodwin.pdf

46. Mitchell & Ashley, ODI Briefing Paper 22, June 2007 — https://cdn.odi.org/media/documents/110_yFKzu3c.pdf

47. Camino de Santiago forum, "Donativos: time for a gentle reminder" — https://caminodesantiago.me/community/threads/donativos-time-for-a-gentle-reminder.66075; Gronze, 8 May 2021 — https://www.gronze.com/articulos/camino-post-covid-albergues-mas-pequenos-mejores-servicios-y-mayor-precio-22087

48. Servas International — https://en.wikipedia.org/wiki/Servas_International (secondary); BeVolunteer statutes — https://www.bevolunteer.org/about-bevolunteer/statutes/

49. Co-op News, 16 November 2021 — https://www.thenews.coop/fundraising-year-nets-e1m-for-platform-co-op-fairbnb/; Co-op News, 7 April 2025 — https://www.thenews.coop/co-op-solutions-to-the-problems-caused-by-short-term-rentals/; TU Dresden, *Current Issues in Tourism*, 2025 — https://fis.tu-dresden.de/portal/en/publications/a-fair-airbnb-selfperceptions-in-the-fairbnb-cooperative-that-aims-to-revolutionise-the-short-term-rental-market(f6590dee-6140-4d3f-bcb4-bed375e7e532).html; Gualavisí & Vizuete-Sandoval, *Internet Policy Review* 15(1), 2026 — https://policyreview.info/articles/analysis/solidarity-coopcycle-latin-america

50. Awana Digital, Mapeo — https://awana.digital/archived-case-studies/mapeo

51. 1News, "ERA rules that Christchurch farm exploited volunteer workers", 11 January 2018 — https://www.1news.co.nz/2018/01/10/era-rules-that-christchurch-farm-exploited-volunteer-workers-fed-them-spoiled-meat

Правова рамка

52. Pravdop, "Правила въезда в Украину для иностранцев в 2026 году", January 2026 — https://pravdop.com/en/publications/kommentarii-zakonodatelstva/pravila-vezda-v-ukrainu-dlya-inostrancev-v-2026-godu-kak-izbezhat-otkazov-i-proyti-granicu-bez-riskov-01-2026-137/; Minfin, 12 January 2026 — https://minfin.com.ua/ua/amp/2026/01/12/166090510/ (insurance requirement for visa-free entry: *unsettled*)

53. UK FCDO travel advice, 14 August 2026 — https://www.gov.uk/foreign-travel-advice/ukraine; US Department of State, 3 September 2026 — https://travel.state.gov/en/international-travel/travel-advisories/ukraine.html; Auswärtiges Amt, 9 October 2026 — https://www.auswaertiges-amt.de/de/reiseundsicherheit/ukrainesicherheit-201946; Government of Canada — https://travel.gc.ca/destinations/ukraine

54. Visnyk NANU, "Комендантська година Івано-Франківськ: актуальні правила 2026", 18 August 2026 (secondary; to be confirmed against the oblast order) — https://visnyk-nanu.org.ua/komendantska-godyna-ivano-frankivsk-aktualni-pravyla-2026/

55. Suspilne, "У ДПСУ розповіли деталі у змінах щодо прикордонного режиму", 16 December 2023 — https://suspilne.media/640822-u-dpsu-rozpovili-detali-u-zminah-sodo-prikordonnogo-rezimu/; Focus, 16 July 2024 — https://focus.ua/uk/eksklyuzivy/657923-zaborona-na-karpati-kogo-ne-pustyat-u-gori; TSN, 19 October 2025 — https://tsn.ua/tourism/iaki-dokumenty-potribno-maty-dlia-toho-shchob-pity-v-hory-poblyzu-kordonu-perelik-2937875.html; Verkhovynskyi National Nature Park — https://verkhovynskyi-park.in.ua/en/activity/

56. RecordingLaw, Ukraine data privacy laws, 2026 — https://www.recordinglaw.com/world-laws/world-data-privacy-laws/ukraine-data-privacy-laws/; DSLUA digest, June 2026 — https://dslua.org/wp-content/uploads/2026/07/media_jun26.pdf; EDPB Guidelines 3/2018 on territorial scope — https://edpb.europa.eu/sites/edpb/files/files/file1/edpb_guidelines_3_2018_territorial_scope_en.pdf; LegalAid.ua on property purchase by foreigners, 7 January 2025 — https://legalaid.ua/ua/kupivlya-neruhomosti-inozemczem-v-ukrayini-osnovni-aspekty/

57. DTKT consulting, "Зелений туризм: чи є податкові пільги?", 23 May 2023 — https://consulting.dtkt.ua/taxation/other/19536-zelenii-turizm-ci-je-podatkovi-pilgi; Verkhovna Rada, 29 April 2021 — https://www.rada.gov.ua/news/Povidomlennya/207789.html; Suspilne, 29 April 2021 — https://suspilne.media/126865-rada-poperedno-pidtrimala-zmini-do-zakonu-pro-turizm-so-voni-peredbacaut/; Derzhprodspozhyvsluzhba Ternopil, 25 April 2023 — https://dpss-te.gov.ua/news/shcho-potribno-ekspluatatsiinyi-dozvil-chy-derzhavna-reiestratsiia-potuzhnostei-operatora-rynku

58. Law of Ukraine "On Tourism", art. 1 and 17 — https://protocol.ua/ua/pro_turizm_stattya_1/ and https://protocol.ua/ua/pro_turizm_stattya_17/; Jurliga on gift taxation, 20 September 2021 — https://jurliga.ligazakon.net/news/206312_otrimano-podarunok-podatkvts-poyasnili-shcho-neobkhdno-znati; DTKT on barter, 12 March 2025 — https://news.dtkt.ua/accounting/automation/96844-ci-moze-fizosoba-zagalnik-zaimatisia-barterom; Directive (EU) 2015/2302, art. 2(2) — https://www.legislation.gov.uk/eudr/2015/2302/article/2/2020-12-31/data.htm

59. Euronews, 17 March 2026 — https://www.euronews.com/my-europe/2026/03/17/; European Pravda, 16 June 2026 — https://www.eurointegration.com.ua/eng/news/2026/06/16/7239763/; European Pravda, 29 September 2026 — https://www.eurointegration.com.ua/eng/news/2026/09/29/7246508/

Теорія та рамки

60. Dudley (ed.), *Guidelines for Applying Protected Area Management Categories*, IUCN 2008; Dudley, Phillips, Amend, Brown & Stolton, "Evidence for Biodiversity Conservation in Protected Landscapes", *Land* 5(4):38, 2016 — https://www.mdpi.com/2073-445x/5/4/38; Locke & Dearden, *Environmental Conservation* 32(1), 2005

61. UNESCO, Report of the Expert Group on Cultural Landscapes, La Petite Pierre, 1992, ¶38–40 — https://whc.unesco.org/archive/pierre92.htm; *Operational Guidelines*, Annex 3

62. Maffi, "Linguistic, Cultural, and Biological Diversity", *Annual Review of Anthropology* 34, 2005, p. 601 — https://www.cbd.int/financial/doc/maffi_linguistic_cultural_biological_diversity.pdf

63. MacCannell, "Staged Authenticity", *American Journal of Sociology* 79(3), 1973, pp. 596–597

64. Wang, "Rethinking authenticity in tourism experience", *Annals of Tourism Research* 26(2), 1999

65. Blackstock, "A critical look at community based tourism", *Community Development Journal* 40(1), 2005

66. Dredge, "Regenerative tourism: transforming mindsets, systems and practices", *Journal of Tourism Futures* 8(3), 2022 — https://www.emerald.com/jtf/article-pdf/8/3/269/1662658/jtf-01-2022-0015.pdf

67. Turner & Turner, *Image and Pilgrimage in Christian Culture*, Columbia University Press 1978, p. 20

68. Mbiti, *African Religions and Philosophy*, Heinemann 1969; Metz, "Toward an African Moral Theory", *Journal of Political Philosophy* 15(3), 2007 — https://philarchive.org/rec/METTAA; Le Grange, "Ubuntu, Ukama and the Healing of Nature, Self and Society", *Educational Philosophy and Theory* 44(S2), 2012; Matolino & Kwindingwi, "The end of ubuntu", *South African Journal of Philosophy* 32(2), 2013; Gwaravanda in Chemhuru (ed.), *African Environmental Ethics*, Springer 2019

69. *Toloka*: the pan-Ukrainian custom of collective voluntary labour, documented in Ukrainian ethnography; no English-language study of Hutsul guest customs specifically was found — the primary ethnographies are Shukhevych, *Hutsulshchyna* (1899–1908) and Kaindl, *Die Huzulen* (1894)

70. Corrado, Dematteis & Di Gioia (eds.), *Nuovi montanari: Abitare le Alpi nel XXI secolo*, FrancoAngeli 2014; Solana-Solana, "Rural gentrification in Catalonia, Spain", *Geoforum* 41(3), 2010; Solé, Solana &

Mendizabal, “Integration and international migration in a mountain area: the Catalan Pyrenees”, *Journal of Alpine Research* 102-3, 2014; Moss (ed.), *The Amenity Migrants*, CABI 2006

71. Berkes, Colding & Folke, “Rediscovery of traditional ecological knowledge as adaptive management”, *Ecological Applications* 10(5), 2000, p. 1252
72. Mansuri & Rao, *Localizing Development: Does Participation Work?*, World Bank 2013 — https://www.worldbank.org/en/research/publication/localizing-development-does-participation-work
73. Platteau, “Monitoring Elite Capture in Community-Driven Development”, *Development and Change* 35(2), 2004
74. Rambaldi, Chambers, McCall & Fox, “Practical ethics for PGIS practitioners, facilitators, technology intermediaries and researchers”, *PLA* 54, IIED 2006 — https://www.iied.org/g02957
75. Carroll et al., “The CARE Principles for Indigenous Data Governance”, *Data Science Journal* 19(1):43, 2020 — https://doi.org/10.5334/dsj-2020-043
76. Scholz, *Platform Cooperativism: Challenging the Corporate Sharing Economy*, Rosa Luxemburg Stiftung 2016 — https://resources.uwcc.wisc.edu/Platform/platformcoop.pdf
77. Berg & Dasmann, “Reinhabiting California”, *The Ecologist* 7(10), 1977 — https://planetdrum.org/reinhabiting-california/; Alexander, “Bioregionalism: Science or Sensibility?”, *Environmental Ethics* 12(2), 1990
78. Ostrom, *Governing the Commons*, Cambridge University Press 1990; Cox, Arnold & Villamayor-Tomás, *Ecology and Society* 15(4):38, 2010
79. Derrida, *Of Hospitality*, Stanford 2000; *On Cosmopolitanism and Forgiveness*, Routledge 2001, p. 16
80. Mauss, *The Gift*, 1925; Hyde, *The Gift*, 1983, ch. 1
81. Illich, *Tools for Conviviality*, 1973 (standard citation p. 11; checked only in a secondary source)

Сталість і регенерація

82. World Commission on Environment and Development, *Our Common Future* (the Brundtland Report), Oxford University Press 1987, ch. 2 ¶1
83. United Nations, *The Sustainable Development Goals Report 2025*, key findings — https://unstats.un.org/sdgs/files/report/2025/SDGs_Report_Key_Findings_2025.pdf
84. UNEP and UNWTO, *Making Tourism More Sustainable: A Guide for Policy Makers*, 2005, pp. 11–12
85. Interfax-Ukraine, “Буковель” on its Sustainable Development Office (Bohdan Krasavtsev), 19 May 2025 — https://interfax.com.ua/news/economic/1072976.html
86. Lyle, *Regenerative Design for Sustainable Development*, Wiley 1994
87. Reed, “Shifting from ‘sustainability’ to regeneration”, *Building Research & Information* 35(6):674–680, 2007 — https://doi.org/10.1080/09613210701475753
88. Mang & Reed, “Designing from place: a regenerative framework and methodology”, *Building Research & Information* 40(1):23–38, 2012
89. Gibbons, “Regenerative—The New Sustainable?”, *Sustainability* 12(13):5483, 2020 — https://doi.org/10.3390/su12135483; Wahl, *Designing Regenerative Cultures*, Triarchy Press 2016

Історія

90. Стежки та мапи, «Товариство Плай», без дати, прочитано 9 жовтня 2026 року — https://stezhky.org/stezhky/istoriya-fundacziyi-ks/prytulky/prytulok-pliscze/tovarystvo-plaj/

Аппалачська стежка

91. MacKaye, "An Appalachian Trail: A Project in Regional Planning", *Journal of the American Institute of Architects*, жовтень 1921 — https://www.hudsonrivervalley.org/documents/d/guest/mackaye1921

92. Appalachian Trail Conservancy, "A Cooperative Approach to Managing the Appalachian Trail", без дати (після 2016; 31 клуб) — https://appalachiantrail.org/wp-content/uploads/2020/04/cooperative-management.pdf; ATC, "Clubs & Partners" (перелічено 30 клубів), прочитано 9 жовтня 2026 року — https://appalachiantrail.org/protect/trail-management/clubs-partners/

93. Appalachian Trail Histories, "Eminent domain" — https://appalachiantrailhistory.org/exhibits/show/federal-land-acquisition–the-/eminent-domain; Appalachian Trail Conservancy, "The Appalachian Trail Bill of 1978" — https://appalachiantrail.org/news-stories/at-bill-of-1978/

Це живий документ. Він змінюватиметься в міру зростання мережі, і кожну зміну буде записано.